

VALVOLE A SFERA
e RUBINETTI
BALL and METERING
VALVES

VALVOLA a SFERA in OTTONE NICHELATO

BALL VALVE in NICKEL PLATED BRASS



Temperatura Nominale / Rated Temperature

80 °C

176 °F

Codice Part No.	Attacchi Connections	Diam. Nom. Rated Diam.	Press. Amm. Perm. Pressure	Massa Weight		5
				gr	oz	
20.0032	Rp 3/8 F - Rp 3/8 F	ø 8 mm ø 0.31"	21 MPa / 3045 psi	47	1.66	5
20.0033	Rp 1/2 F - Rp 1/2 F	ø 12 mm ø 0.47"	21 MPa / 3045 psi	63	2.22	5

Sfera di chiusura cromata su tenuta in resina acetilica / Chromed closing ball on acetyl resin seals

VALVOLA a SFERA in INOX 304

BALL VALVE in STAINLESS STEEL 304



Temperatura Nominale / Rated Temperature

150 °C

302 °F

Codice Part No.	Attacchi Connections	Diam. Nom. Rated Diam.	Press. Amm. Perm. Pressure	Massa Weight		5
				gr	oz	
20.0129	G 1/4 F - G 1/4 F	ø 10 mm ø 0.39"	50 MPa / 7250 psi	294	10.37	5
20.0130	G 3/8 F - G 3/8 F	ø 14 mm ø 0.55"	50 MPa / 7250 psi	458	16.16	5
20.0131	G 1/2 F - G 1/2 F	ø 14 mm ø 0.55"	50 MPa / 7250 psi	433	15.27	5

Sfera di chiusura inox su tenute in teflon / S.steel closing ball on teflon seals

VALVOLA a SFERA in ACCIAIO

BALL VALVE in STEEL



Temperatura Nominale / Rated Temperature

80 °C

176 °F

Codice Part No.	Attacchi Connections	Diam. Nom. Rated Diam.	Press. Amm. Perm. Pressure	Massa Weight		5
				gr	oz	
20.0126	G 1/4 F - G 1/4 F	ø 6 mm ø 0.24"	50 MPa / 7250 psi	415	14.64	5
20.0127	G 3/8 F - G 3/8 F	ø 10 mm ø 0.39"	50 MPa / 7250 psi	580	20.46	5
20.0128	G 1/2 F - G 1/2 F	ø 13 mm ø 0.51"	50 MPa / 7250 psi	685	24.16	5

Sfera di chiusura cromata su tenute in teflon / Chromed closing ball on teflon seals

VALVOLA a SFERA in OTTONE

BALL VALVE in BRASS



Temperatura Nominale / Rated Temperature

130 °C

266 °F

Codice Part No.	Attacchi Connections	Diam. Nom. Rated Diam.	Press. Amm. Perm. Pressure	Massa Weight		5
				gr	oz	
20.0028	G 3/8 F - G 3/8 F	ø 10 mm ø 0.39"	4 MPa / 600 psi	87	3.07	5
20.0027	G 1/4 F - G 1/4 F	ø 10 mm ø 0.39"	4 MPa / 600 psi	87	3.07	5
20.0029	G 1/2 F - G 1/2 F	ø 15 mm ø 0.59"	4 MPa / 600 psi	140	4.94	5
20.0030	G 3/4 F - G 3/4 F	ø 20 mm ø 0.79"	4 MPa / 600 psi	200	7.05	5
20.0031	G 1" F - G 1" F	ø 25 mm ø 0.98"	4 MPa / 600 psi	377	13.30	5

Sfera di chiusura inox su tenute in teflon / S.steel closing ball on teflon seals

RUBINETTO REGOLATORE PRESSIONE VAPORE STEAM VALVE

Pressione Ammissibile / Rated Pressure	25 MPa	3625 psi
Temperatura Nominale / Rated Temperature	150 °C	302 °F

Codice Part No.	Ugello Nozzle	Entrata Inlet	Uscita Outlet	Massa Weight		
				gr	oz	
22.0059	Ø 0.8 - 0.031"	G 1/4 M	G 1/4 M	165	5.82	10
22.0060	Ø 0.12 - 0.047	G 1/4 M	G 1/4 M	165	5.82	10
22.0061	Ø 1.5 - 0.059	G 1/4 M	G 1/4 M	165	5.82	10
22.0062	Ø 1.8 - 0.071	G 1/4 M	G 1/4 M	165	5.82	10
22.0063	Ø 2 - 0.079	G 1/4 M	G 1/4 M	165	5.82	10

Pistone Inox / S.Steel needle



REGOLATORE DETERGENTE a T T SHAPED DETERGENT METERING VALVE

Pressione Ammissibile / Rated Pressure	3 MPa	435 psi
Flusso Nominale / Rated Flow	10 l/min	2.6 U.S. gal/min
Temperatura Nominale / Rated Temperature	40 °C	104 °F

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
22.0119	G 1/4 M	G 1/4 M	125	4.41	10
22.0120	G 1/4 F	G 1/4 F	116	4.09	10



REGOLATORE DETERGENTE a L L SHAPED CHEMICAL METERING VALVE

Pressione Ammissibile / Rated Pressure	3 MPa	435 psi
Flusso Nominale / Rated Flow	10 l/min	2.6 U.S. gal/min
Temperatura Nominale / Rated Temperature	40 °C	104 °F

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
22.0064	G 1/4 M	G 1/4 M	165	5.82	10

Pistone Inox / S.Steel needle



RUBINETTO GALLEGGIANTE in PLASTICA

FLOAT VALVE - PLASTIC BODY



Pressione Ammissibile / Rated Pressure	1 MPa	145 psi
Temperatura Nominale / Rated Temperature	60 °C	140 °F
Ingombro / Overall Size	200 mm	7.8"

Codice Part No.	Entrata Inlet	Filtro Filter	Tubo Pipe	Massa Weight		
				gr	oz	
22.0001	G 3/4 M	X	X	100	3.53	20
22.0010	G 3/4 M	✓	X	101	3.56	20
22.0011	G 3/4 M	X	✓	105	3.70	20
22.0012	G 3/4 M	✓	✓	106	3.74	20


RUBINETTO GALLEGGIANTE in OTTONE

FLOAT VALVE - BRASS BODY



Pressione Ammissibile / Rated Pressure	0.7 MPa	105 psi
Temperatura Nominale / Rated Temperature	60 °C	140 °F
Ingombro / Overall Size	240 mm	9.4"

Codice Part No.	Entrata Inlet	Filtro Filter	Tubo Pipe	Massa Weight		
				gr	oz	
22.0015	G 3/4 M	X	X	210	7.41	10
22.0013	G 3/4 M	✓	X	211	7.44	10
22.0016	G 3/4 M	X	✓	215	7.58	10
22.0014	G 3/4 M	✓	✓	216	7.62	10
22.0017	G 1/2 M	X	X	205	7.23	10
22.0018	G 1/2 M	X	✓	210	7.41	10

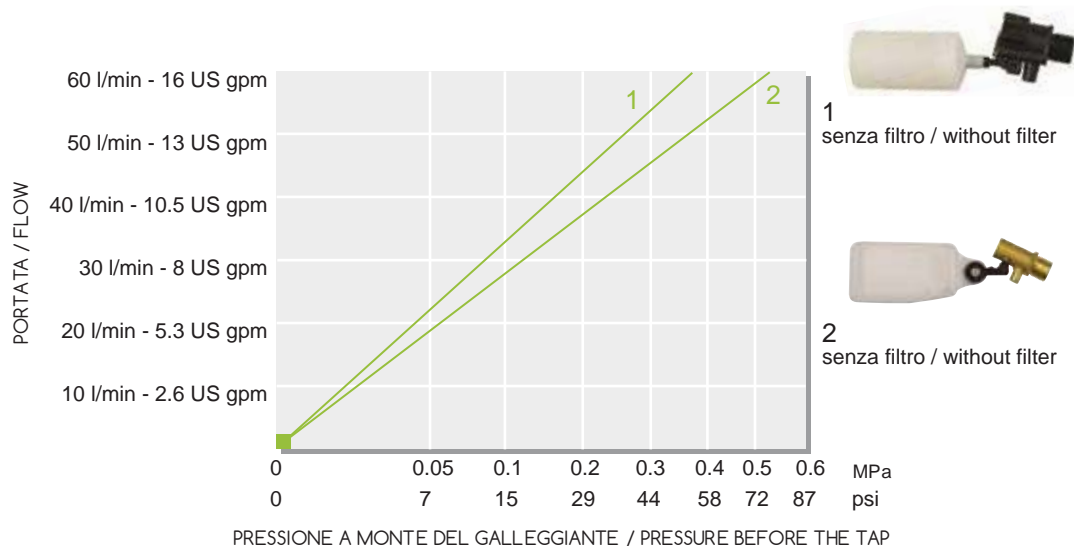

RACCORDI in OTTONE per GALLEGGIANTE

BRASS NIPPLES for TAPS with FLOAT

Codice Part No.	Entrata Inlet	Uscita Outlet	Filtro Filter	Massa Weight		
				gr	oz	
22.0002	G 3/4 F	G 3/4 M	✓	57	2.01	10
22.0003	G 3/4 F	G 3/4 M	X	56	1.98	10
22.0004	G 1/2 F	G 3/4 M	✓	36	1.27	10
22.0005	G 1/2 F	G 3/4 M	X	35	1.23	10
22.0006	G 3/4 M	G 1/2 M	✓	72	2.54	10
22.0007	G 3/4 M	G 1/2 M	X	71	2.50	10
22.0008	G 3/4 M	G 3/8 M	✓	66	2.33	10
22.0009	G 3/4 M	G 3/8 M	X	65	2.29	10



VASCHETTA con COPERCHIO

TANK with COVER

Temperatura / Temperature	60 °C	140 °F
Capacità / Capacity	3 litri	0.79 U.S. gal
Dim. Ingombro / Overall Size	4.7X10.2X8.1	
Dimensioni / Overall Size	120 x 260 x 205 mm - 4.7" x 10.2" x 8.1"	
Materiale / Material	Polipropilene / Polypropylene	

Codice Part No.	Paratia Bulkhead	Fori Coperchio Cover holes	Massa Weight		
			gr	oz	
22.0065	X	X	625	22.05	10
22.0066	✓	X	664	23.42	10
22.0067	X	2 fori / 2 holes (3/4"-3/8")	620	21.87	10
22.0068	✓	1 foro / 1 hole (3/4")	660	23.28	10



