



GIUNTI GIREVOLI
ALTA PRESSIONE
HIGH PRESSURE
SWIVEL

GIUNTO GIREVOLE INOSSIDABILE DIRITTO con CUSCINETTO a SFERE

STAINLESS STRAIGHT SWIVEL with BALL BEARING



Pressione Ammissibile / Permissible Pressure	28 MPa	4060 psi
Flusso Nominale / Rated Flow	40 l/min	10.5 U.S. gal/min
Temperatura Nominale / Rated Temperature	120 °C	248 °F

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
26.0001	G 1/4 F	G 1/4 M	210	7.41	5
26.0002	G 1/4 F	G 3/8 M	235	8.29	5
26.0003	G 3/8 F	G 3/8 M	245	8.64	5
26.0004	G 3/8 F	G 1/4 M	240	8.47	5

GIREVOLE INOSSIDABILE a 90°

90° STAINLESS SWIVEL



Pressione Ammissibile / Permissible Pressure	28 MPa	4060 psi
Flusso Nominale / Rated Flow	40 l/min	10.5 U.S. gal/min
Temperatura Nominale / Rated Temperature	120 °C	250 °F

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
26.0005	G 1/4 M	G 1/4 F	475	16.76	5
26.0006	G 3/8 M	G 1/4 F	500	17.64	5
26.0007	G 3/8 M	G 3/8 F	510	17.99	5
26.0008	G 1/4 M	G 3/8 F	505	17.81	5

GIREVOLE INOSSIDABILE a 90° per LAVARUOTE

90° STAINLESS SWIVEL for WHEEL WASHING BRUSH



Pressione Ammissibile / Permissible Pressure	12 MPa	1740 psi
Flusso Nominale / Rated Flow	45 l/min	12 U.S. gal/min
Temperatura Nominale / Rated Temperature	90 °C	194 °F
Numero Giri / Rounds per Minute	150 giri/min	150 RPM

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
26.0100	G 1/4 M	G 1/4 F	290	10.23	5

GIUNTI GIREVOLI AGS45 in ACCIAIO INOX AGS45 STAINLESS STEEL SWIVEL COUPLINGS

Pressione Nominale / Rated Pressure	40 MPa	5800 psi
Pressione Ammissibile / Permissible Pressure	45 MPa	6525 psi
Flusso nominale / Rated Flow	45 l/min	12 U.S. gal/min
Temperatura Nominale / Rated Temperature	160 °C	320 °F
Materiale / Material	acciaio inox / stainless steel	

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
22.0435	G 3/8 F	G 3/8 M	110	3.88	10



GIUNTI GIREVOLI AG35 AG35 SWIVEL COUPLINGS

Pressione Nominale / Rated Pressure	31 MPa	4500 psi
Pressione Ammissibile / Permissible Pressure	35 MPa	5075 psi
Flusso nominale / Rated Flow	45 l/min	12 U.S. gal/min
Temperatura Nominale / Rated Temperature	160 °C	320 °F
Materiale / Material	ottone / brass	

Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
22.0431	G 3/8 F	G 3/8 M	120	4.24	10
22.0432	M22 M	G 3/8 M	115	4.06	10



GIUNTI GIREVOLI DIRITTI STRAIGHT SWIVEL COUPLINGS

Pressione Ammissibile / Permissible Pressure	28 MPa	4060 psi
Flusso nominale / Rated Flow	40 l/min	10.5 U.S. gal/min
Temperatura Nominale / Rated Temperature	150 °C	302 °F

Codice Part No.	Tipo Type	Entrata Inlet	Uscita Outlet	Massa Weight		
				gr	oz	
22.0351	A	G 3/8 F	G 3/8 M	95	3.35	10
22.0352	A	G 3/8 F	G 1/4 M	90	3.17	10
22.0069	B	G 3/8 F	G 3/8 M	100	3.53	10



Pressione Ammissibile / Permissible Pressure	25 MPa	3625 psi
Flusso nominale / Rated Flow	30 l/min	8 U.S. gal/min


Codice Part No.	Entrata Inlet	Uscita Outlet	Massa Weight		
			gr	oz	
22.0070	M22 F	G 1/4 M	190	6.70	10
22.0342	M22 F	G 1/4 F	195	6.88	10
22.0071	M22 F	M22 M	195	6.88	10
22.0164	M22 F	G 3/8 M	205	7.23	10



GIUNTO GIREVOLE DIRITTO tipo K STRAIGHT SWIVEL COUPLING fitting KARCHER

Pressione Ammissibile / Permissible Pressure	25 MPa	3625 psi
Flusso nominale / Rated Flow	30 l/min	8 U.S. gal/min

Codice Part No.	Tipo Type	Attacchi Connections	Materiale Material	Massa Weight		
				gr	oz	
22.0115	A	G 3/8 F - G 3/4 M	Acciaio / Steel	260	9.17	5
22.0116	A	G 3/8 F - G 3/4 M	Inox / S.Steel	270	9.52	5
22.0206	B	G 3/8 F - 1/2 NPT M	Ottone / Brass	235	8.29	5
22.0207	B	G 3/8 F - M 27x2 M	Ottone / Brass	285	10.05	5

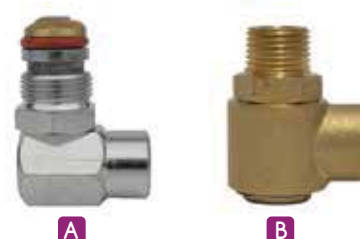

GIUNTO GIREVOLE 90° SWIVEL COUPLING 90°

Note/Notes

A series of 30 horizontal grey bars for writing notes.