


## UP2000

ISO 8849  
ISO 8846



**HEAVY DUTY**



12V  
24V



H 183 x L 96 x W 116  
H 7 1/4" x L 3 3/4" x W 4 5/8"

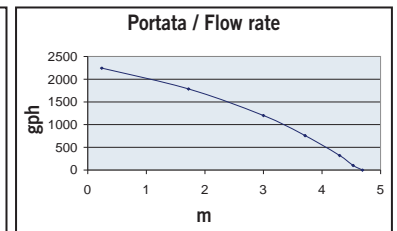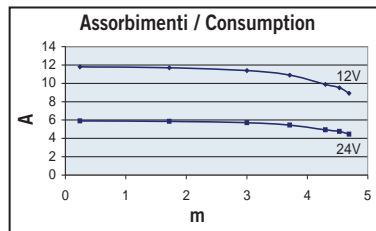

PORTATA  
FLOW RATE  
max.

PRESSIONE  
PRESSURE  
max.

126 l/min  
2000 gph

0,4 bar  
5.8 psi

CODICE PART NUMBER	VOLTS	PREVALENZA LIFT	CONS.	MOTORE MOTOR	FUSIBILE FUZE	TUBO TUBE	PESO WEIGHT
160 160 12	12	4 m	12A	150W	25A	32 mm	2 kg
160 160 13	24	4 m	6A	150W	15A	32 mm	2 kg


## UP3700

ISO 8849  
ISO 8846



**HEAVY DUTY**



24V



H 202 x L 110 x W 130  
H 8" x L 4 3/8" x W 5 1/8"

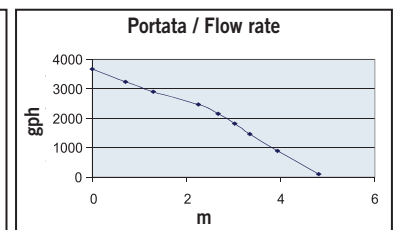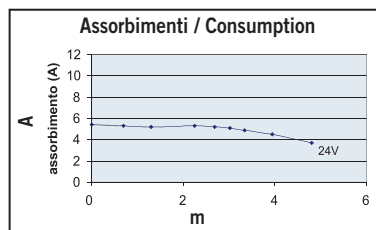

PORTATA  
FLOW RATE  
max.


PRESSIONE  
PRESSURE  
max.

233 l/min  
3700 gph

0,5 bar  
7.3 psi

CODICE PART NUMBER	VOLTS	PREVALENZA LIFT	CONS.	MOTORE MOTOR	FUSIBILE FUZE	TUBO TUBE	PESO WEIGHT
160 180 13	24	5 m	6A	200W	10A	38 mm	3,2 kg

## AS2



H 113 x L 83 x W 62  
H 4 1/2" x L 3 1/4" x W 2 1/2"

- IT** Interruttore automatico per controllo pompe ad immersione.
- EN** Automatic float switch for submersible pumps.
- DE** Automatischer Schalter zur Überwachung der Tauchpumpen.
- ES** Interruptor automático para controlar bombas sumergibles.
- FR** Contacteur automatique pour pompes immergées.
- PT** Interruptor automático para controlar bombas submergíveis.

CODICE PART NUMBER	AMP.	OFF/ON	CAVO WIRE	DIMENSIONI DIMENSIONS mm
161 002 20	max. 10	25/55 mm	850 mm	113 x 83 x 62