Professional machine.

Battery with traction motor.

Optimal for working on surfaces up to 1,500/2,000 m².





1




Model		NR2 52	NR2 60
Features			
Work corridor mm		520	600
Dryer mr	n	800	800
Traction			
Motor: Power (W)		250	250
Brushes			
Motor: Quantity/Powe No./W	r	1/375	2/250
Pressure on the brush N	1	215	260
Suction			
Motor: Power (W)		500	500
Tanks			_
Tank capacity (Dirty/clean water) l		70/73	70/73
Batteries			
Capacity V/Ah (5h)		2x12/118	2x12/118
Machine dimensions			_
Length x width x heigh mm (without floor-clean		1,320x590x1,070	1,230x660x1,070
Empty weight (withou batteries) Kg	t	112	120
Weight of the batteries Kg	5	75	75

Warranty

2 Years - Parts & Labour (Except for non-compliant uses)

- **❖** Very compact, small dimensions and then particularly manoeuvrable
- **Simple and intuitive instructions for the machine controls**
- **❖** Release of the brush/es
- **❖** Maximally reduced operating noise level
- **❖** Water tank with level indicator
- **❖** Integrated battery charger (On request). It is possible to charge the batteries in less than 8 hours

EASY TO USE CONFORTABLE AND SAFE

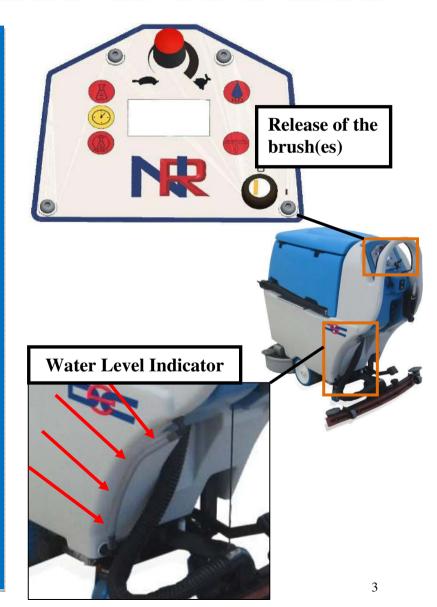


- **❖** High amount of power used (Traction 250W; Suction 500W; Brushes 1x375W/2x250W)
- **❖** Motor-reduction gear unit for brush with parallel axes: improving transmission performance. Very efficient transmission

HIGH PERFORMANCE

- High-capacity battery (118 Ah/5h)
- **❖** Large capacity of the tanks (70/73 l)
- **❖** Electrical design with battery CUT-OFF system. Below a predetermined battery charge level the brush motor will come to a halt

HIGH DEGREE OF AUTONOMY IMPROVED BATTERY LIFE




- * Availability of brushes with different kinds of bristles
- **Availability of training devices for different Pad types**
- **Adjustment of the water flow**
- **❖** Adjustment of the drive speed
- **❖** Adjustment of the flow of detergent (upon request)

IDEAL FOR ALL TYPES OF FLOORS




- Detergent percentage button (on request)
- Detergent tank (on request)



- Drive speed regulator
- Water flow button

- **Dryer with natural rubber wipers**
- **Particular geometry and weight of the dryer**
- ***** Optimisation of blades hardness and thickness

EXCELLENT DRYING

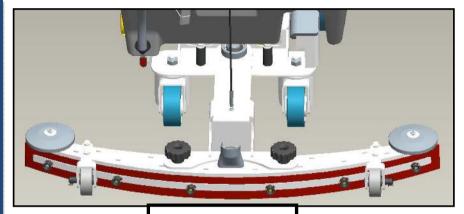


Floor wiper

VERSATILITY OF USE

- * TYPE OF FLOOR: tiles, stoneware, ceramic, clinker, marble, granite, cement, linoleum, rubber, Palladian, porphyry, moulded PVC) which are particularly dirty and rough, and as a result:
- AREAS OF USE: industrial settings, offices, public buildings such as schools and hospitals, airports, sports centres, and shopping centres)

- **❖** It is possible to reverse the recovery tank and its lid on the same side and therefore the tank is easely and fully accessible
- ❖ Dirty water tank which can be easily removed and inspected, equipped with a drain hose
- **❖** The seal of the lid can be removed without tools and therefore easily cleaned

EASY TO CLEAN

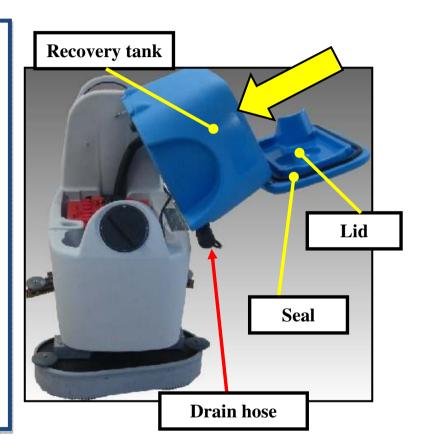

- * Tanks made of shock-resistant material
- ***** High reliability of the components
- Constructive simplicity, easy access to all components and then easy maintenance
- **❖** Blades can be used on all 4 corners
- ***** Blades replacement without tools
- **❖** The components exposed to the oxidation are treated. In particular the squeegee is galvanized and then painted
- ***** Electrical installation protected from water and steam

LOWER MAINTENANCE COSTS

