




water solutions

Data sheet


DRG 750/2/80 A0FT5

GREY
series

Technical specification

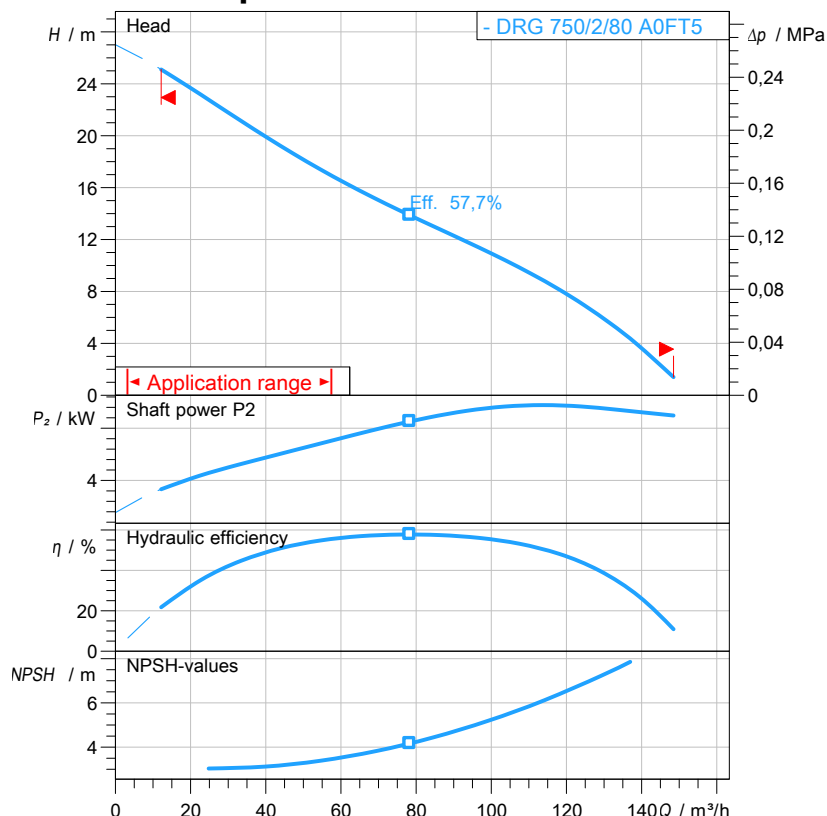3~ 50 Hz


Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B

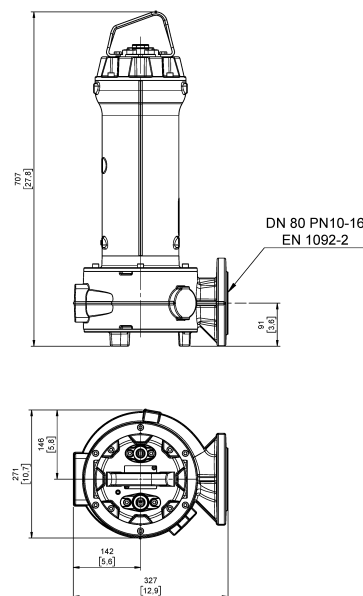[mm
[inch]

Pump

Series	GREY series
Pump name	DRG 750/2/80 A0FT5
Configuration	NGTSB51040N00NN
Standard	CE

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P2	5,5 kW
Incoming power P1	6,32 kW
Rated current	10,8 A
rpm	2866 1/min
Efficiency	87 %
cos φ	0,845
Rated torque	18,3 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	H

Hydraulic

Type	DR (Multi-channel open)
Free passage	40 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	57,7 %
Suction	DN 80 UNDRILLED
Discharge	DN 80 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 200 µm sea water resistant
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features

Cooling system	No cooling jacket
Main cable	4G1,5 + 3x1
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	71,3 kg
Electrical variant	Thermal protection and leakage sensor

* cable, stand and guiding system excluded



water solutions

Data sheet


DRG 750/2/80 A0FT5

GREY
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 40 mm	Discharge DN 80	Suction DN 80
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

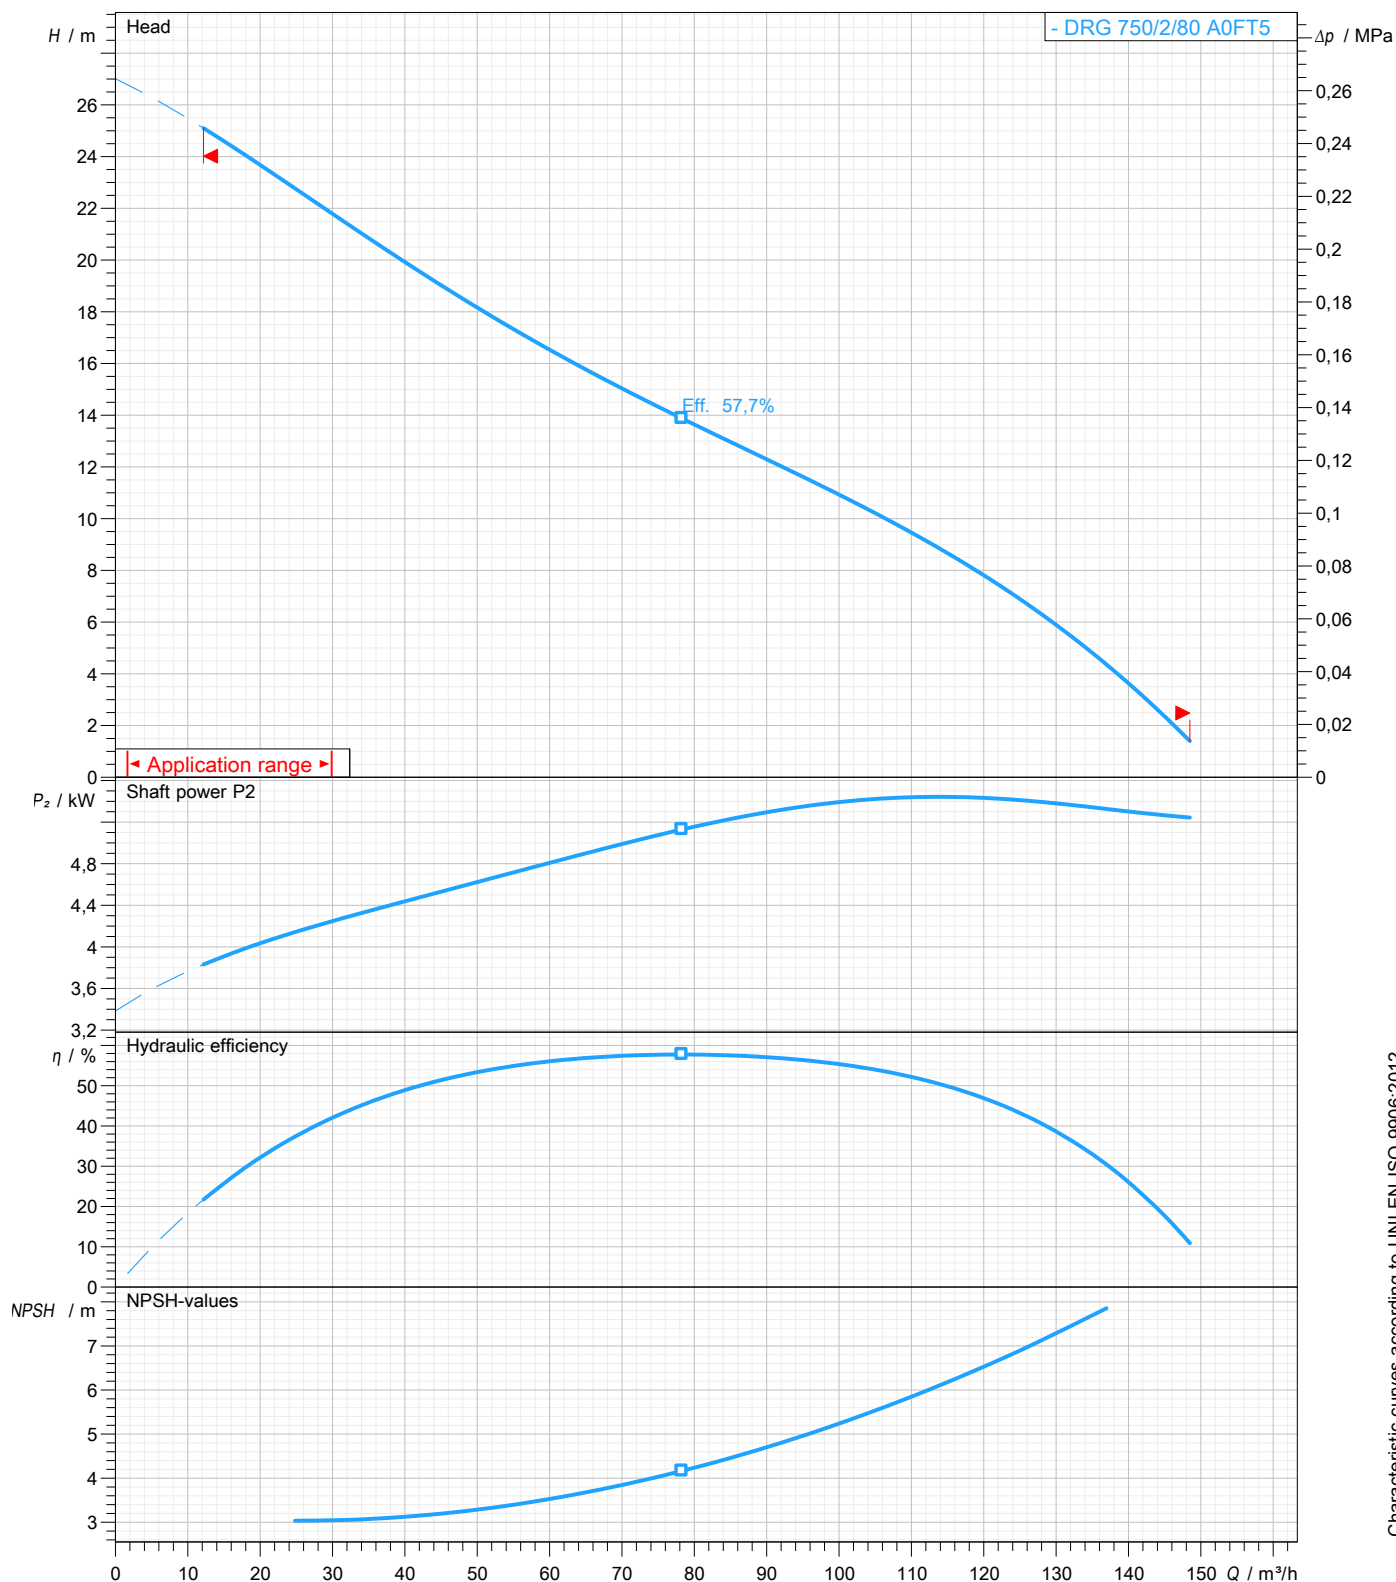

Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B




water solutions

Data sheet

DRG 750/2/80 A0FT5**GREY**
series**Dimensional drawing****3~ 50 Hz**

Installation type Installation with bottom coupling device - Vertical outlet		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 80 EN 1092-2	Suction: DN 80 UNDRILLED	Pressure rating (suction/discharge) -/PN 10
Accessory DAC 80/80V+KAF 116-2" EN (P)		Accessory code 9001.032
Note: Accessory must be ordered separately		

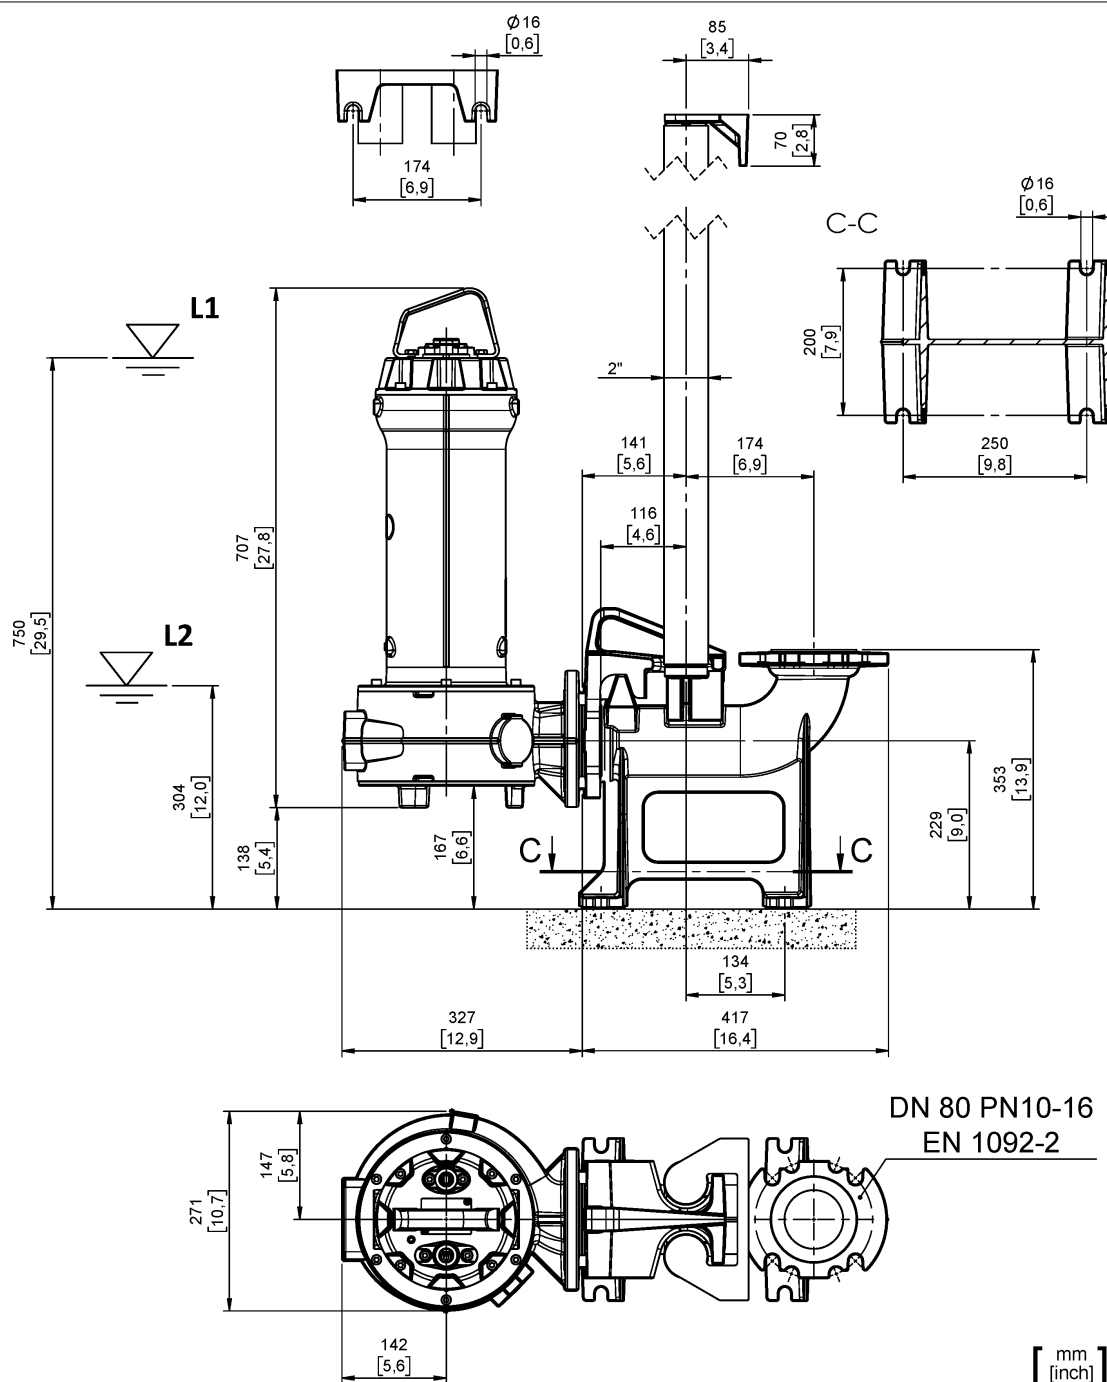

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use (only "WET" version)

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

zenit.com

Created on 2019-03-05

Page 3 / 3



water solutions


Data sheet

DRG 750/2/80 B0FT5


GREY
series

Technical specification

3~ 50 Hz

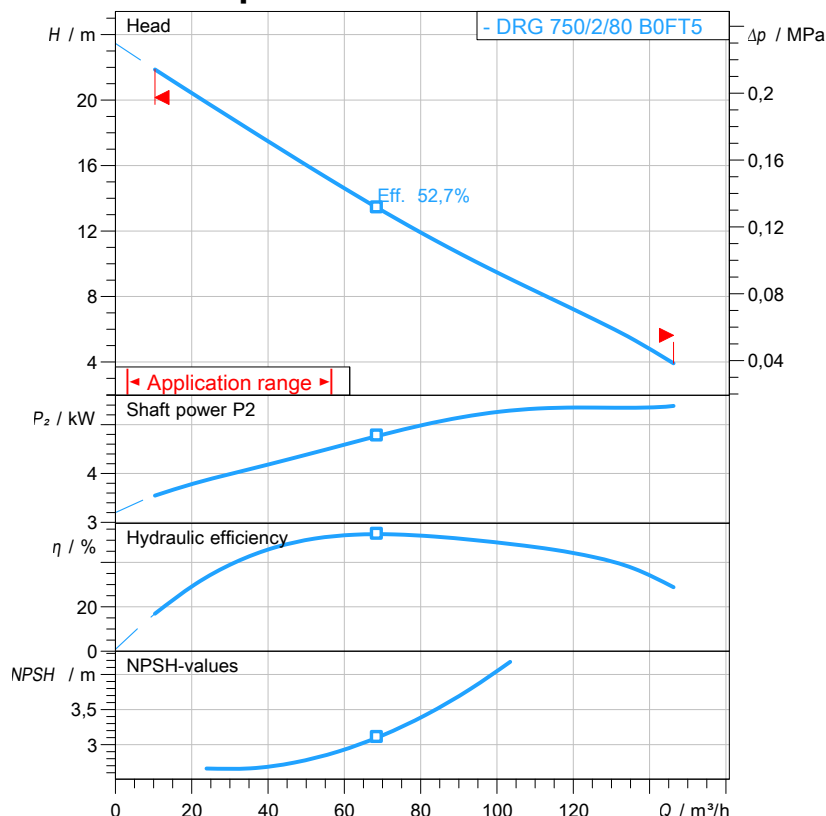

Characteristic curves according to UNI EN ISO 9906:2012
P2 < 10kW: paragraph 4.4.2
10kW < P2 < 100kW: Grade 3B
P2 > 100kW: Grade 2B

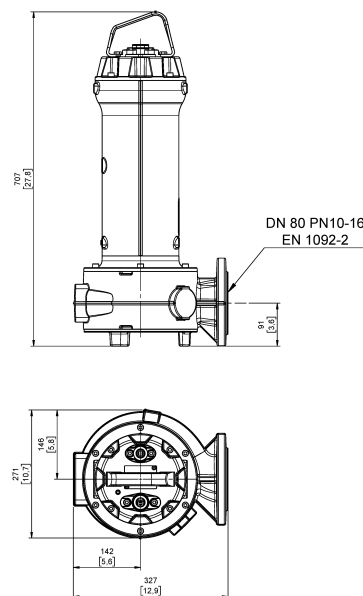

Pump

Series	GREY series
Pump name	DRG 750/2/80 B0FT5
Configuration	NGTSB51040N00NN
Standard	CE

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P2	5,5 kW
Incoming power P1	6,32 kW
Rated current	10,8 A
rpm	2866 1/min
Efficiency	87 %
cos φ	0,845
Rated torque	18,3 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	H

Hydraulic

Type	DR (Multi-channel open)
Free passage	55 x 50 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	52,7 %
Suction	DN 80 UNDRILLED
Discharge	DN 80 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 200 µm sea water resistant
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features

Cooling system	No cooling jacket
Main cable	4G1,5 + 3x1
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	71,3 kg
Electrical variant	Thermal protection and leakage sensor

* cable, stand and guiding system excluded



water solutions

Data sheet


DRG 750/2/80 B0FT5

GREY
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 55 x 50 mm	Discharge DN 80	Suction DN 80
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

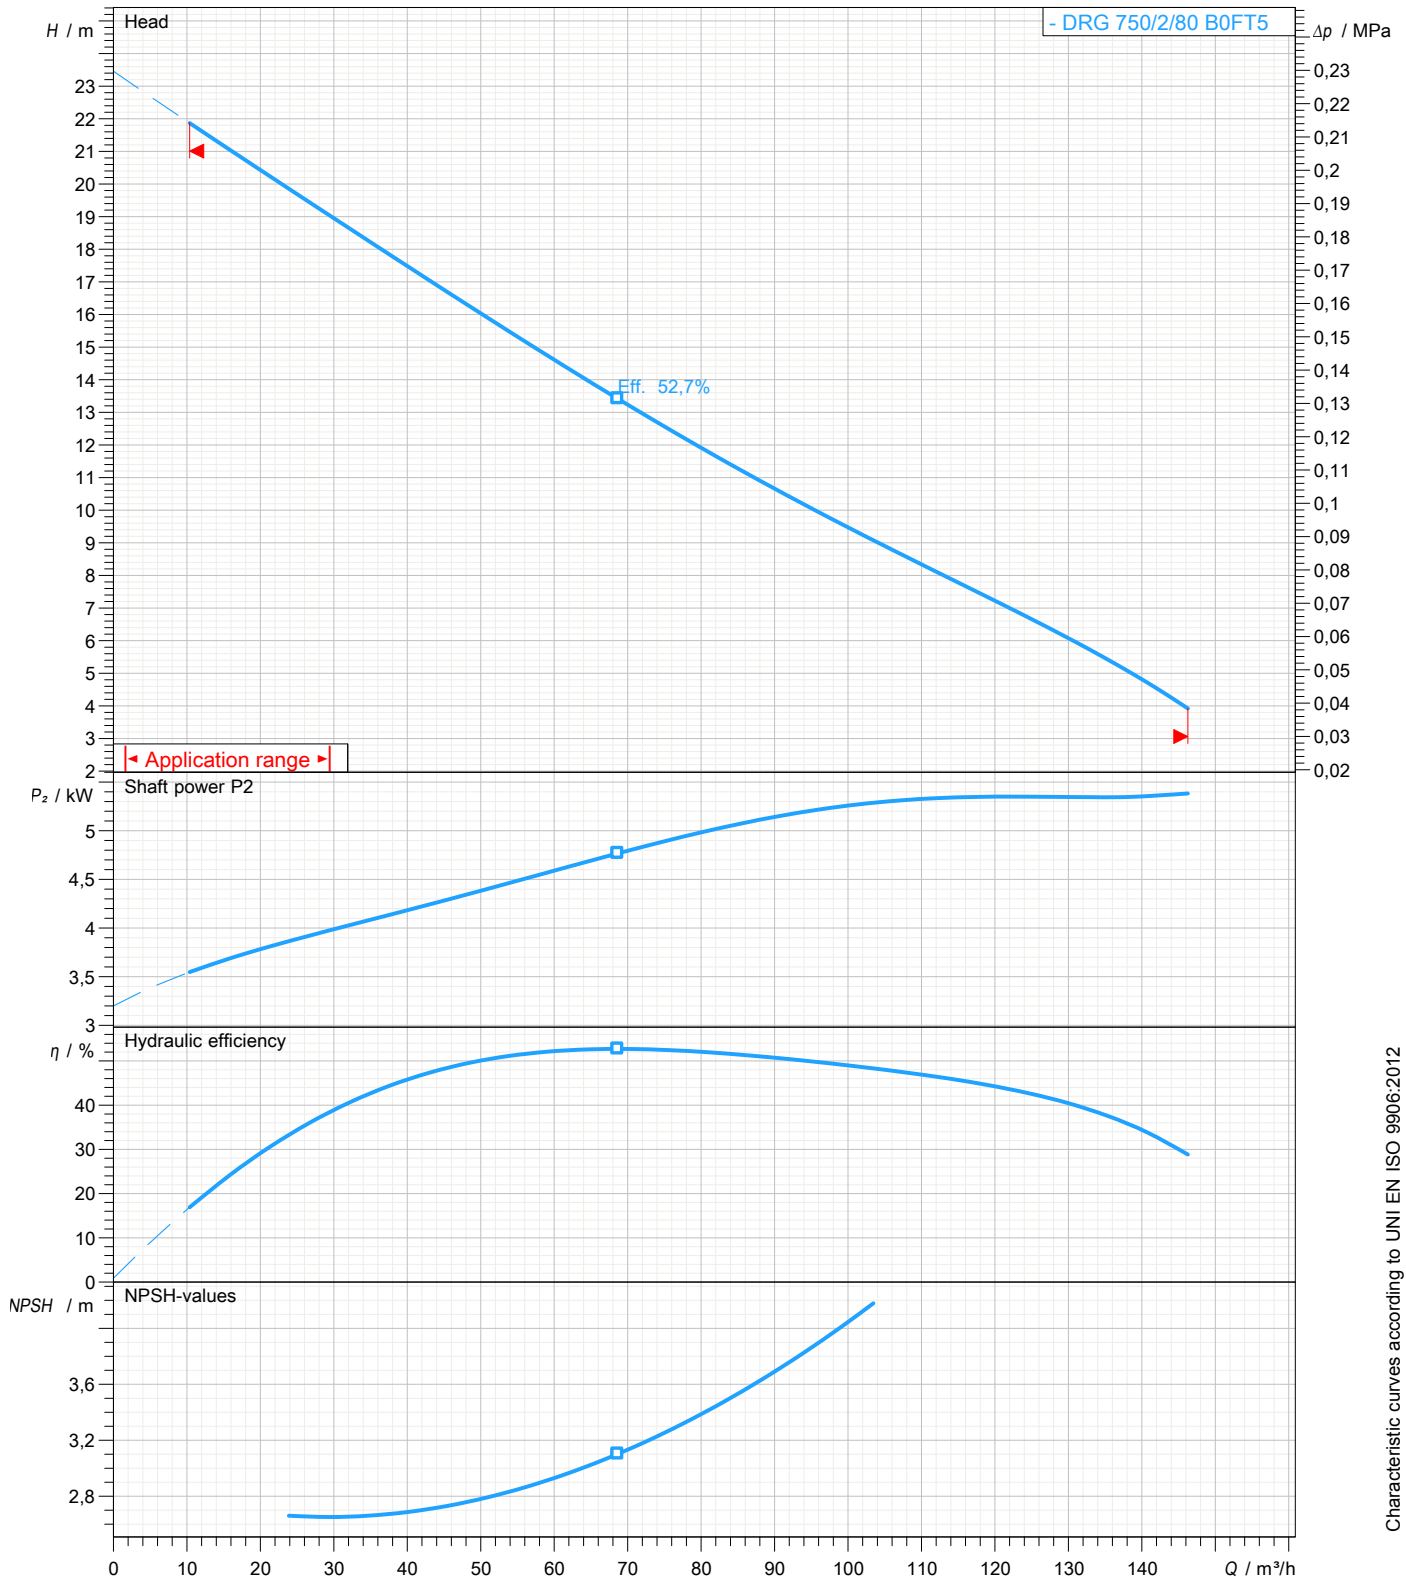

Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B




water solutions

Data sheet

DRG 750/2/80 B0FT5**GREY**
series**Dimensional drawing****3~ 50 Hz**

Installation type Installation with bottom coupling device - Vertical outlet		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 80 EN 1092-2	Suction: DN 80 UNDRILLED	Pressure rating (suction/discharge) -/PN 10
Accessory DAC 80/80V+KAF 116-2" EN (P)		Accessory code 9001.032
Note: Accessory must be ordered separately		

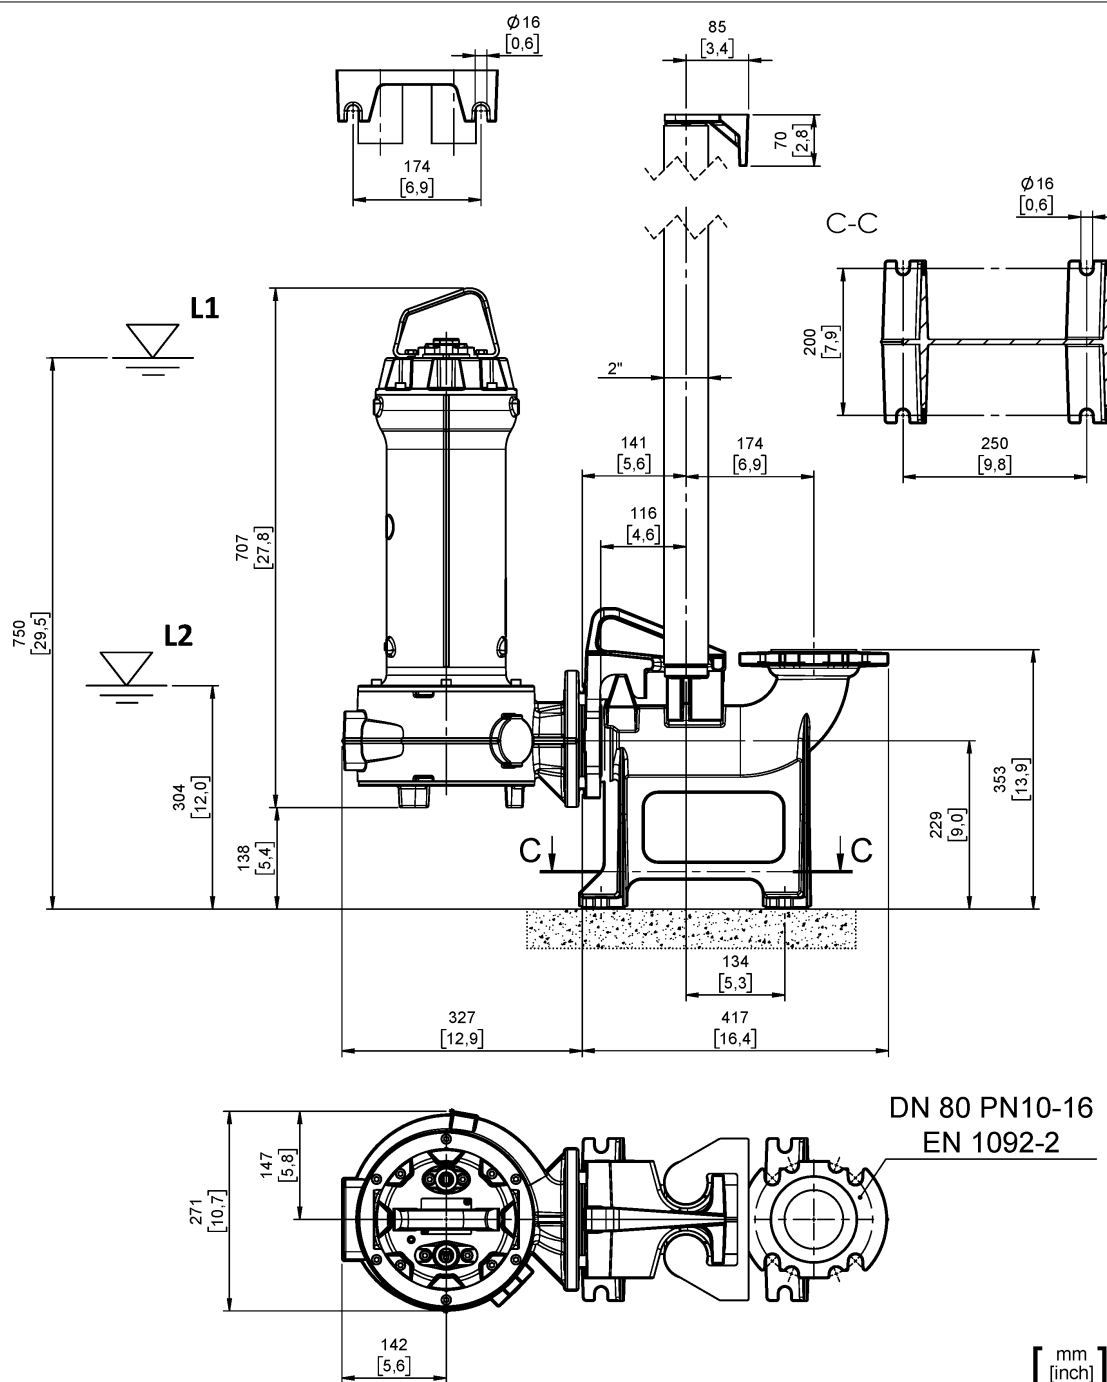

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use (only "WET" version)

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

zenit.com

Created on 2019-03-05

Page 3 / 3




water solutions

Data sheet


DRG 750/4/80 D0FT5

GREY
series

Technical specification

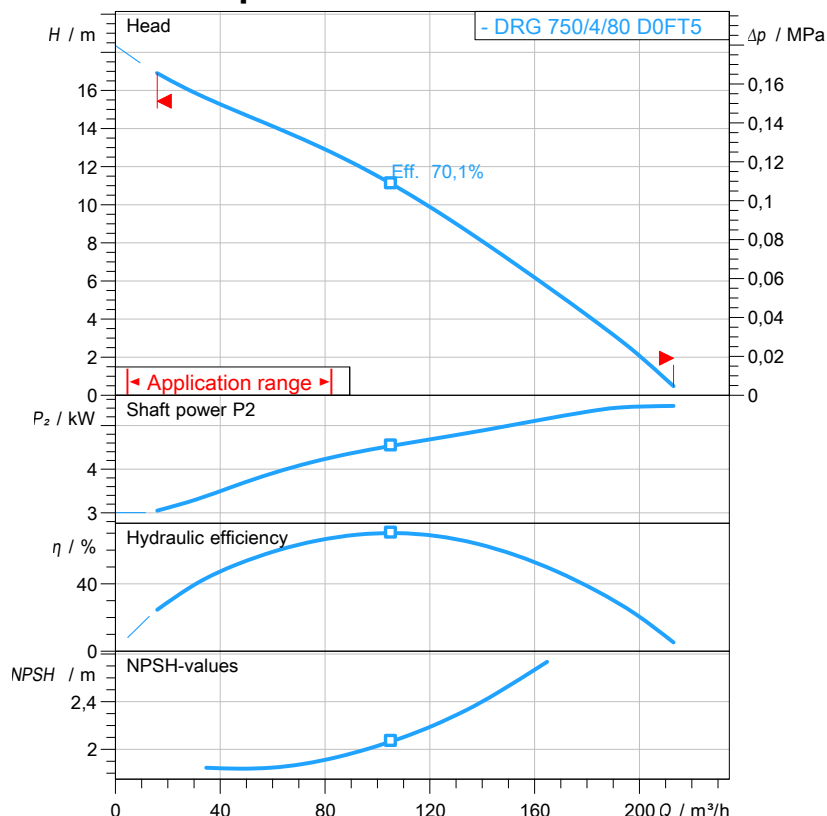3~ 50 Hz


Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B

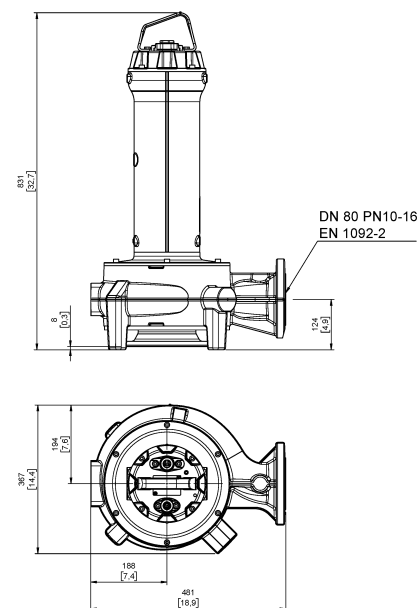

[mm (inch)]

Pump

Series	GREY series
Pump name	DRG 750/4/80 D0FT5
Configuration	NGTSB51040N00NN
Standard	CE

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	4
Rated power P2	5,5 kW
Incoming power P1	6,38 kW
Rated current	11,8 A
rpm	1432 1/min
Efficiency	86,2 %
cos φ	0,778
Rated torque	36,7 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	H

Hydraulic

Type	DR (Multi-channel open)
Free passage	65 x 60 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	70,1 %
Suction	DN 150 UNDRILLED
Discharge	DN 80 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 200 µm sea water resistant
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features

Cooling system	No cooling jacket
Main cable	4G1,5 + 3x1
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	110,2 kg
Electrical variant	Thermal protection and leakage sensor

* cable, stand and guiding system excluded

Rev. 0 - 16-12-2014

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2019-03-05

zenit.com

Page 1 / 3



water solutions

Data sheet


DRG 750/4/80 D0FT5

GREY
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 65 x 60 mm	Discharge DN 80	Suction DN 150
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

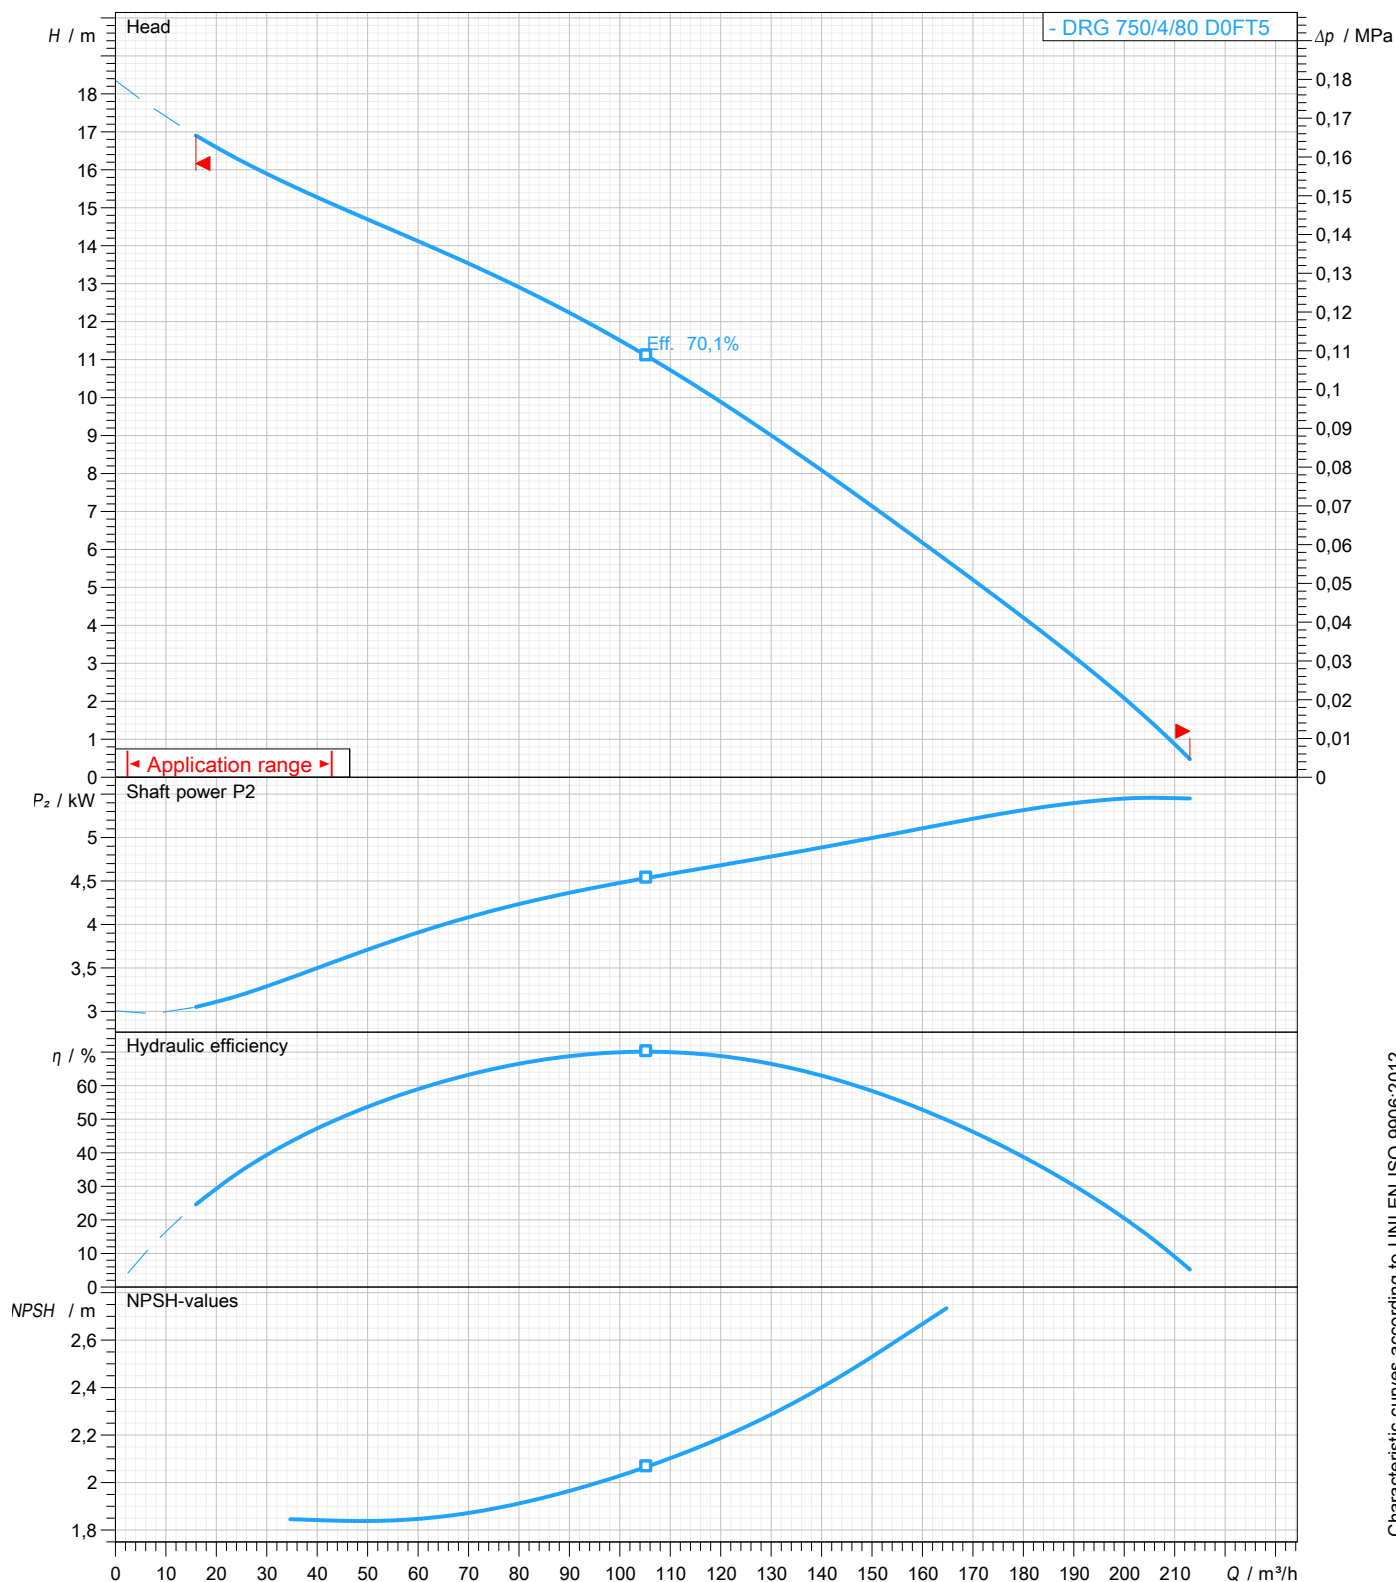

Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B




water solutions

Data sheet

DRG 750/4/80 D0FT5**GREY**
series**Dimensional drawing****3~ 50 Hz**

Installation type Installation with bottom coupling device - Vertical outlet		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 80 EN 1092-2	Suction: DN 150 UNDRILLED	Pressure rating (suction/discharge) -/PN 10
Accessory DAC 80/80V+KAF 116-2" EN (P)		Accessory code 9001.032
Note: Accessory must be ordered separately		

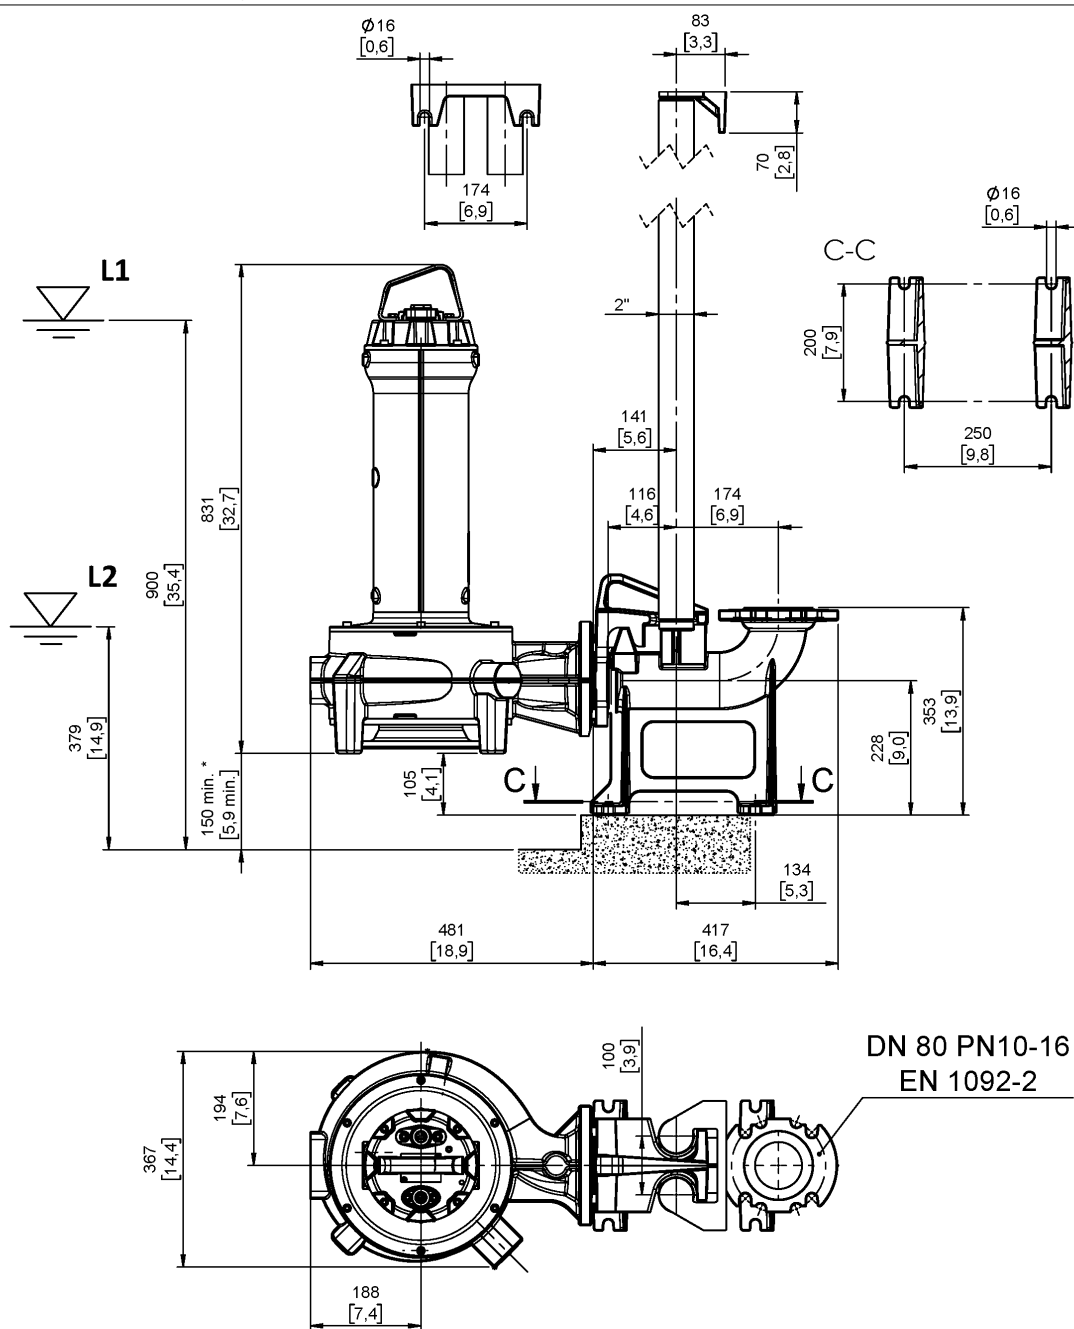[mm
[inch]

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use (only "WET" version)




water solutions

Data sheet


DRG 750/4/100 L0FT5

GREY
series

Technical specification

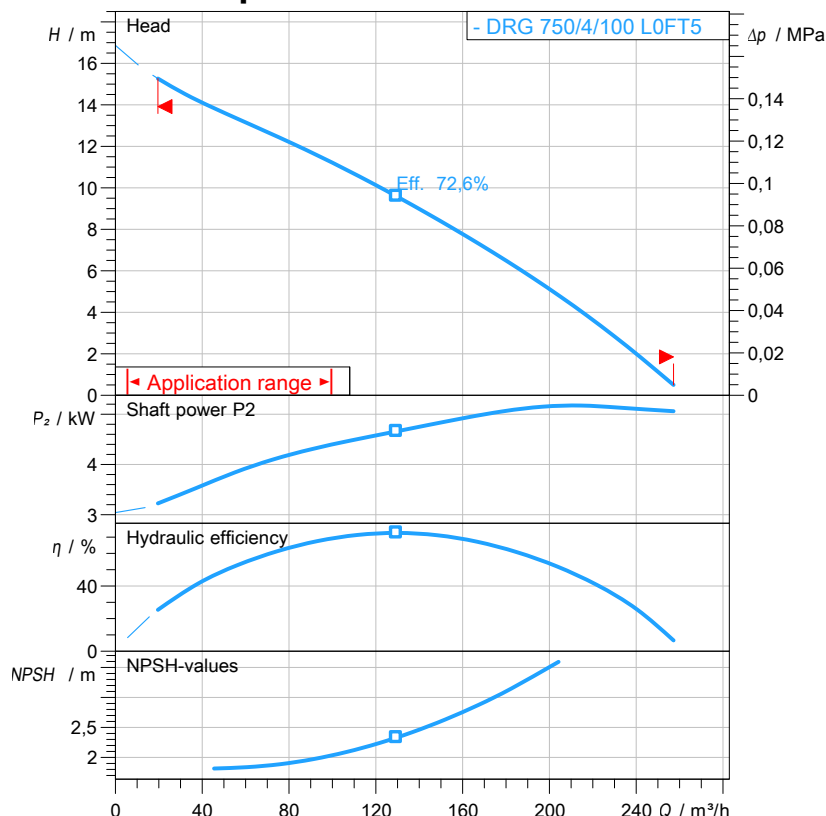3~ 50 Hz


Characteristic curves according to UNI EN ISO 9906:2012
P2 < 10kW: paragraph 4.4.2
10kW < P2 < 100kW: Grade 3B
P2 > 100kW: Grade 2B

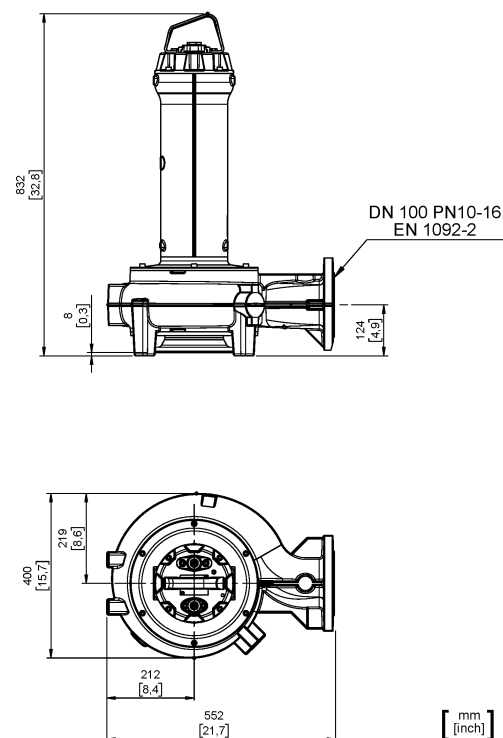

Pump

Series	GREY series
Pump name	DRG 750/4/100 L0FT5
Configuration	NGTSB51040N00NN
Standard	CE

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	4
Rated power P2	5,5 kW
Incoming power P1	6,38 kW
Rated current	11,8 A
rpm	1432 1/min
Efficiency	86,2 %
cos φ	0,778
Rated torque	36,7 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	H

Hydraulic

Type	DR (Multi-channel open)
Free passage	65 x 60 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	72,6 %
Suction	DN 150 UNDRILLED
Discharge	DN 100 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 200 µm sea water resistant
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features

Cooling system	No cooling jacket
Main cable	4G1,5 + 3x1
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	112,2 kg
Electrical variant	Thermal protection and leakage sensor

* cable, stand and guiding system excluded



water solutions

Data sheet


DRG 750/4/100 L0FT5

GREY
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 65 x 60 mm	Discharge DN 100	Suction DN 150
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

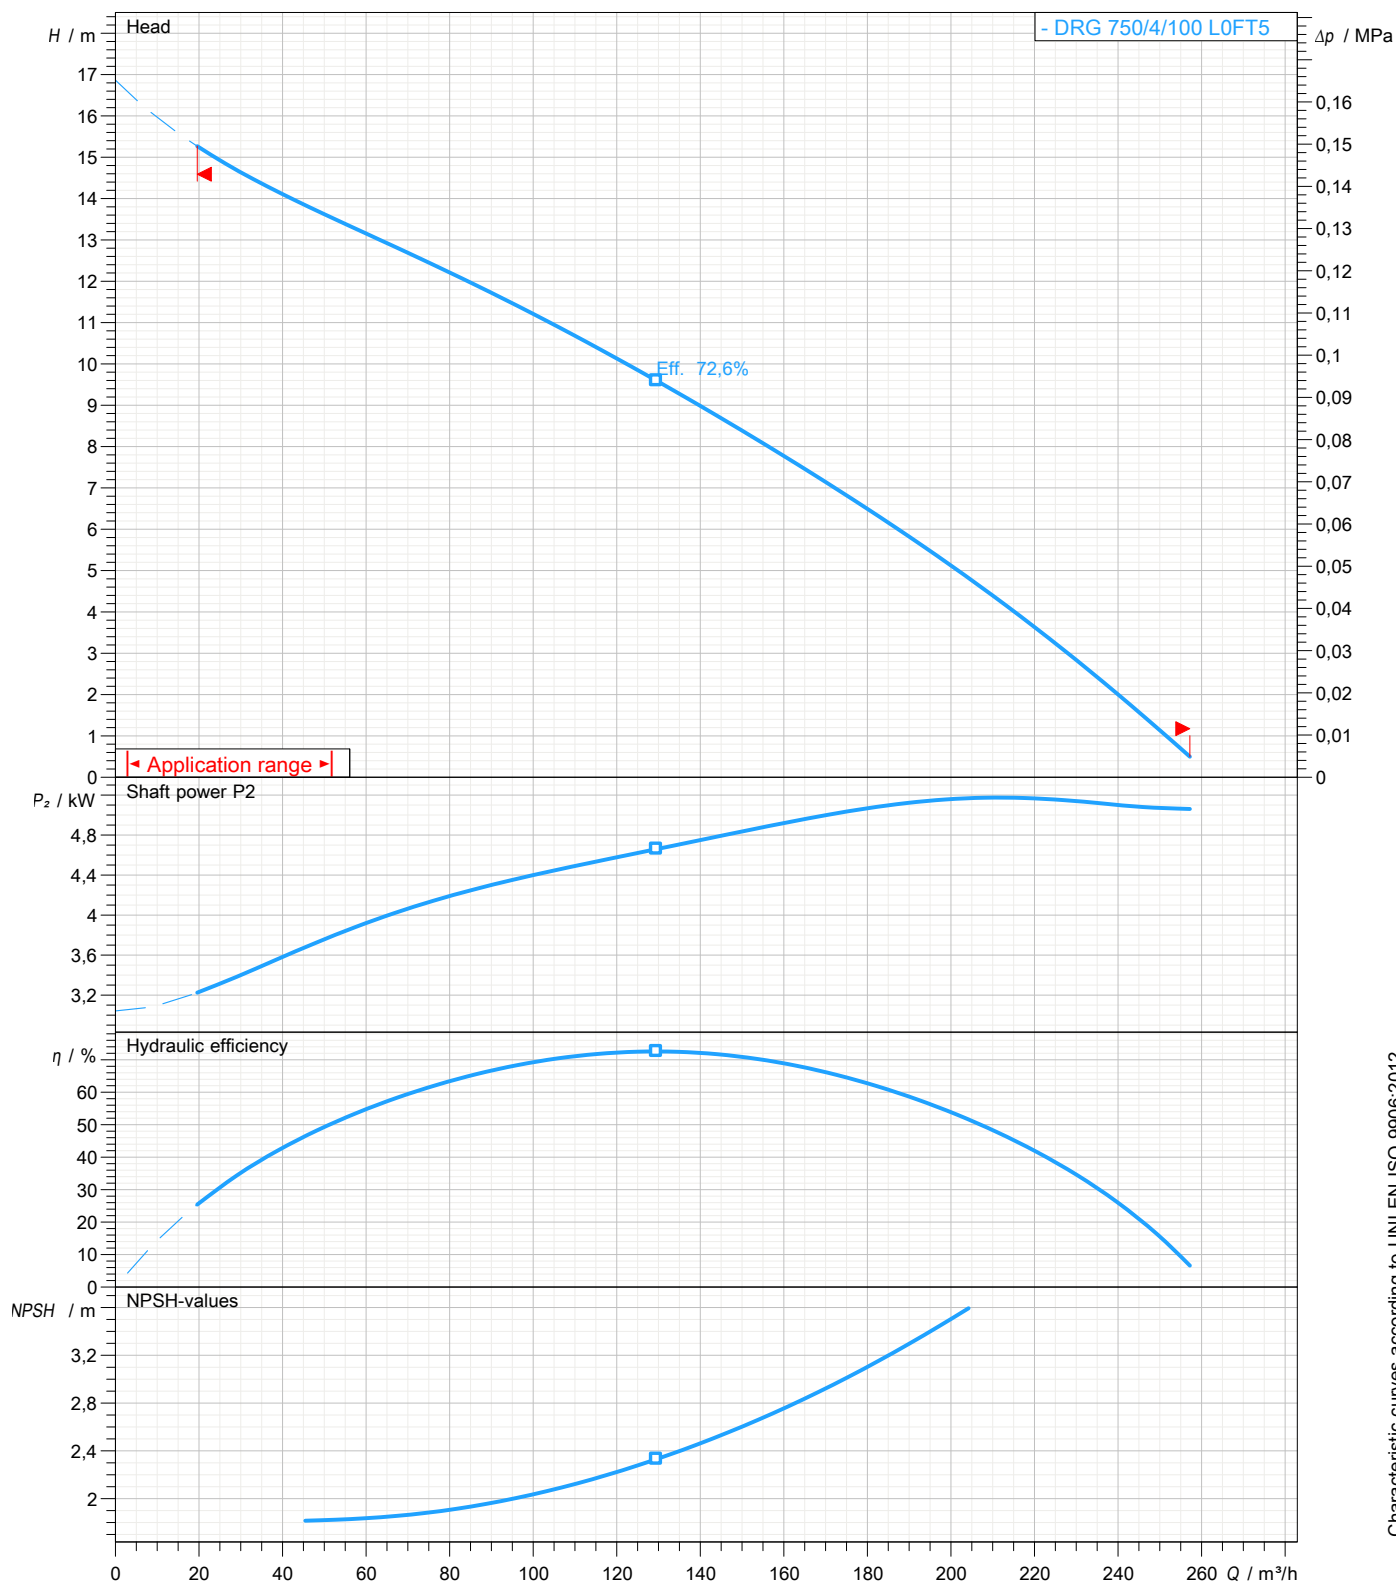

Characteristic curves according to UNI EN ISO 9906:2012

P2<10kW: paragraph 4.4.2


10kW<P2<100kW: Grade 3B

P2>100kW: Grade 2B

Dimensional drawing

3~ 50 Hz

Installation type Installation with bottom coupling device - Vertical outlet		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 100 EN 1092-2	Suction: DN 150 UNDRILLED	Pressure rating (suction/discharge) -/PN 10
Accessory DAC 100/100V+KAF 116-2" EN (P)		Accessory code 9001.033
Note: Accessory must be ordered separately		

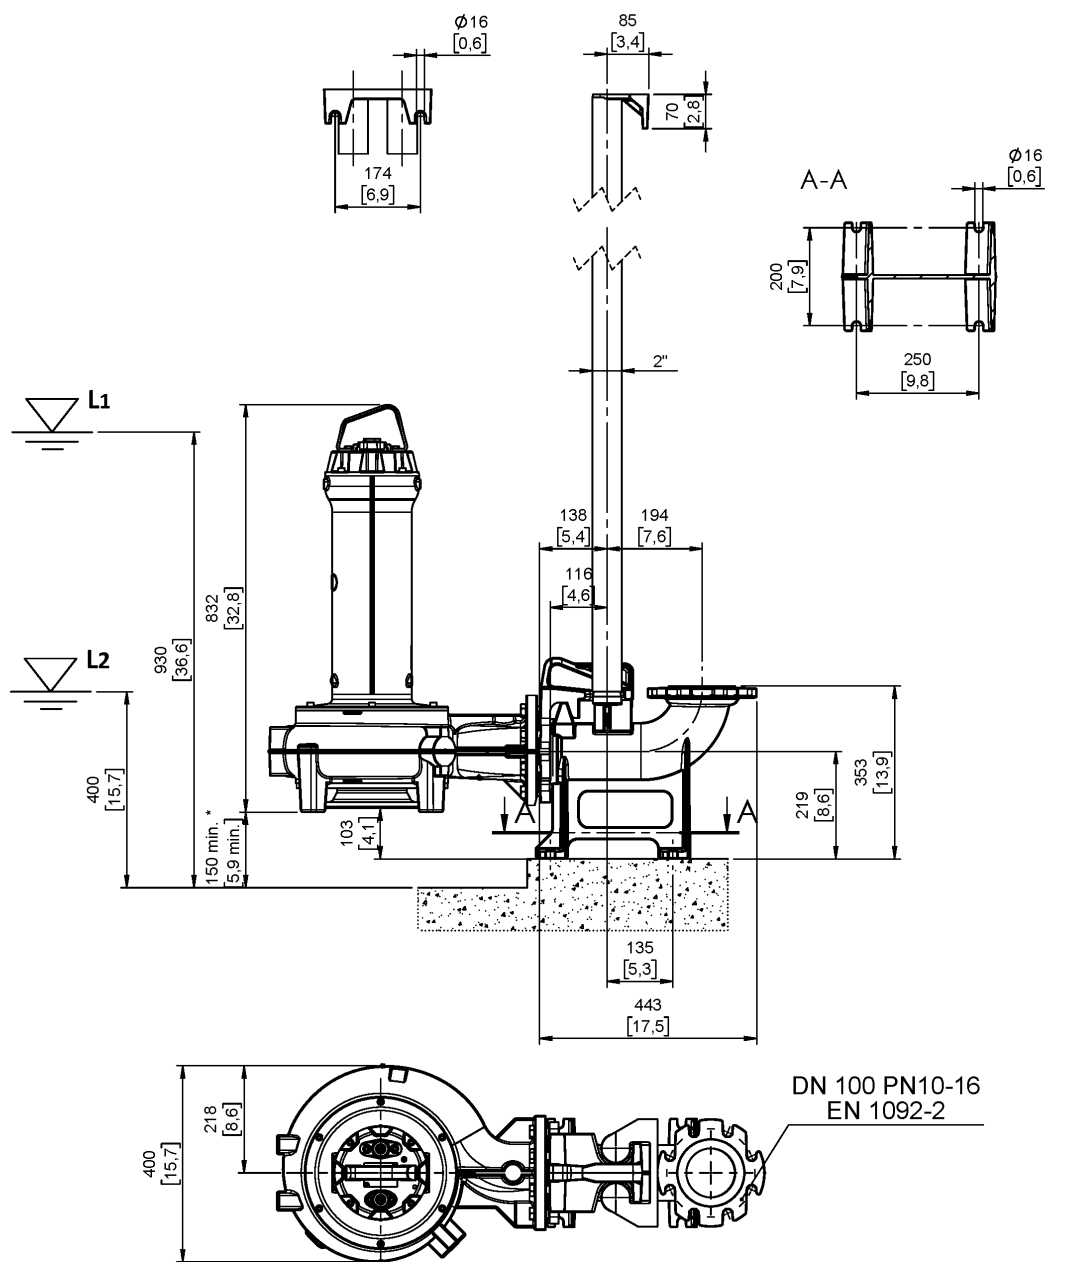[mm]
[inch]

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use (only "WET" version)



water solutions


Data sheet

DRG 750/4/150 N0FT5



GREY
series

Technical specification

3~ 50 Hz

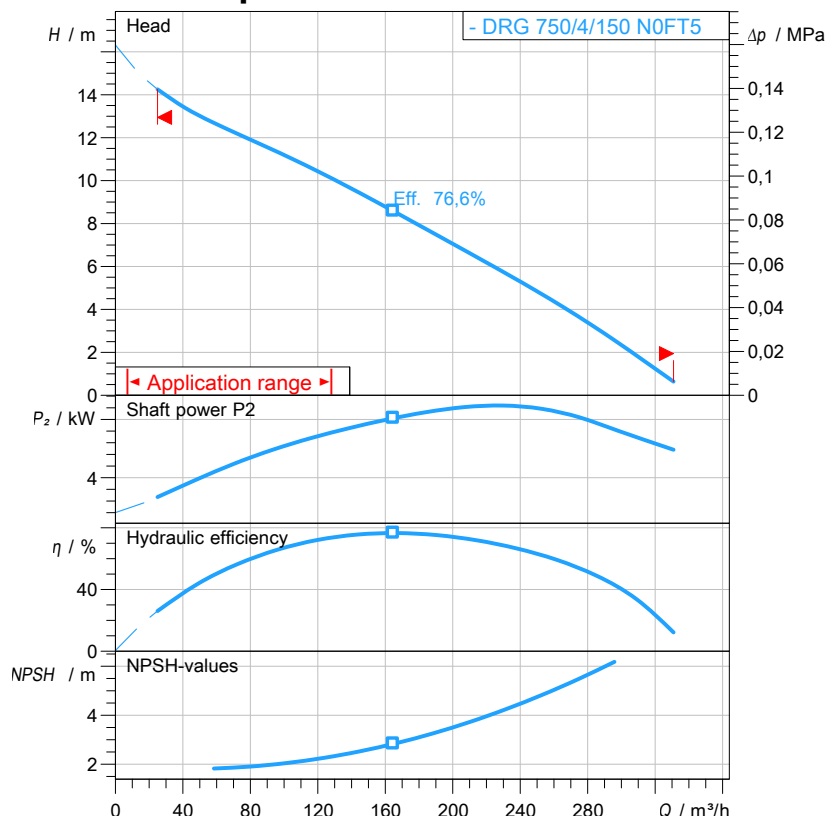

Characteristic curves according to UNI EN ISO 9906:2012
P2 < 10kW: paragraph 4.4.2
10kW < P2 < 100kW: Grade 3B
P2 > 100kW: Grade 2B

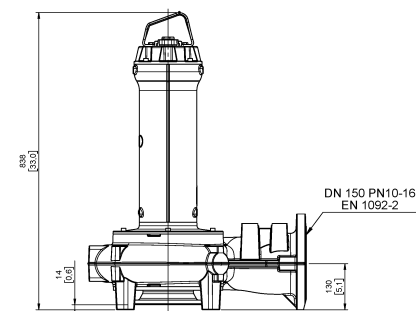[mm
(inch)]

Pump

Series	GREY series
Pump name	DRG 750/4/150 N0FT5
Configuration	NGTSB51040N00NN
Standard	CE

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	4
Rated power P2	5,5 kW
Incoming power P1	6,38 kW
Rated current	11,8 A
rpm	1432 1/min
Efficiency	86,2 %
cos φ	0,778
Rated torque	36,7 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	H

Hydraulic

Type	DR (Multi-channel open)
Free passage	65 x 60 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	76,6 %
Suction	DN 150 UNDRILLED
Discharge	DN 150 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 200 µm sea water resistant
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features

Cooling system	No cooling jacket
Main cable	4G1,5 + 3x1
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	120,2 kg
Electrical variant	Thermal protection and leakage sensor

* cable, stand and guiding system excluded

Rev. 0 - 16-12-2014

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2019-03-05

zenit.com

Page 1 / 3



water solutions

Data sheet


DRG 750/4/150 N0FT5

GREY
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 65 x 60 mm	Discharge DN 150	Suction DN 150
DUTY POINT					
Flow	Head	Shaft power P₂	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

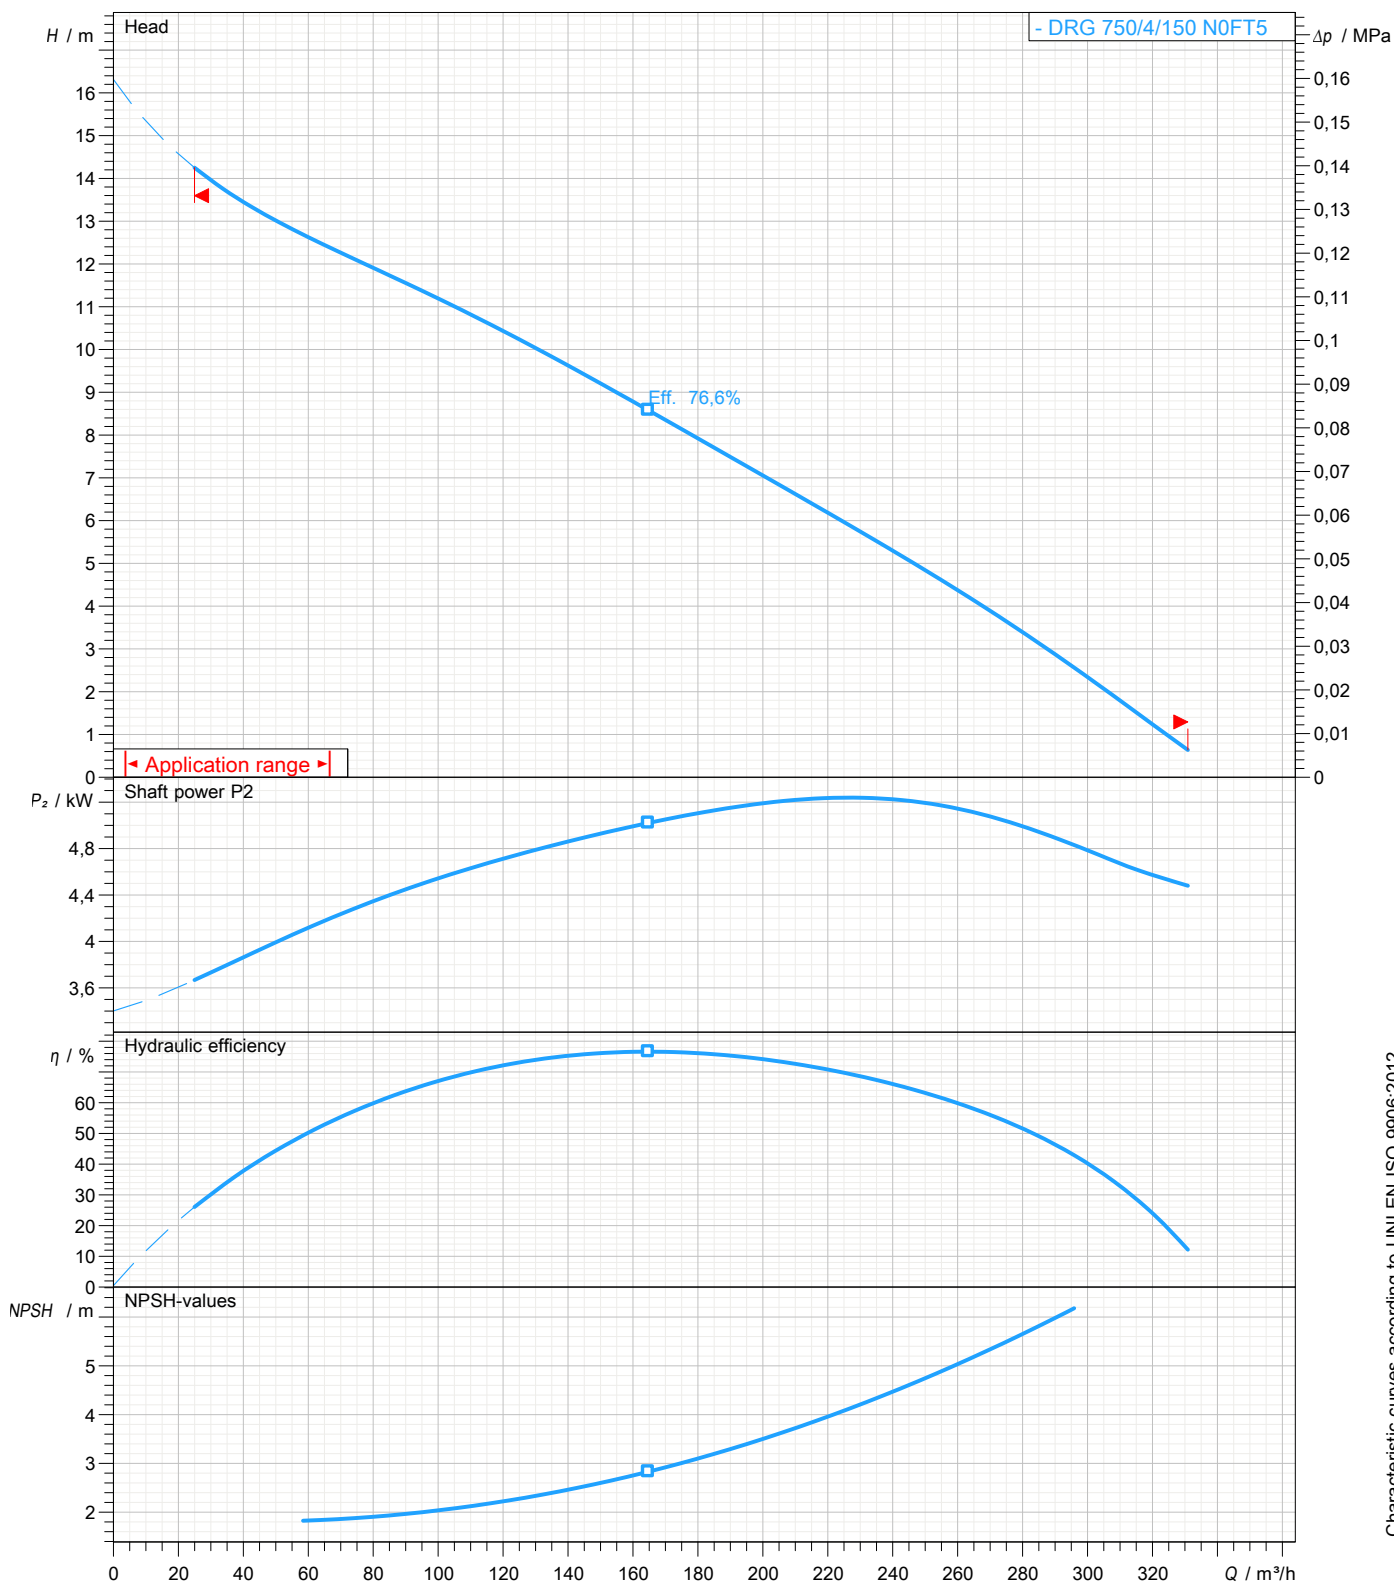


Characteristic curves according to UNI EN ISO 9906:2012

P₂ < 10 kW: paragraph 4.4.210 kW < P₂ < 100 kW: Grade 3BP₂ > 100 kW: Grade 2B

Dimensional drawing

3~ 50 Hz

Installation type P: bottom coupling device - vertical discharge DN200 - guide pipes 2"		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 150 EN 1092-2	Suction: DN 150 UNDRILLED	Pressure rating (suction/discharge) -/PN 10
Accessory DAC 150/200V+KAF 116-2" EN (P)		Accessory code 9001.010
Note: Accessory must be ordered separately		

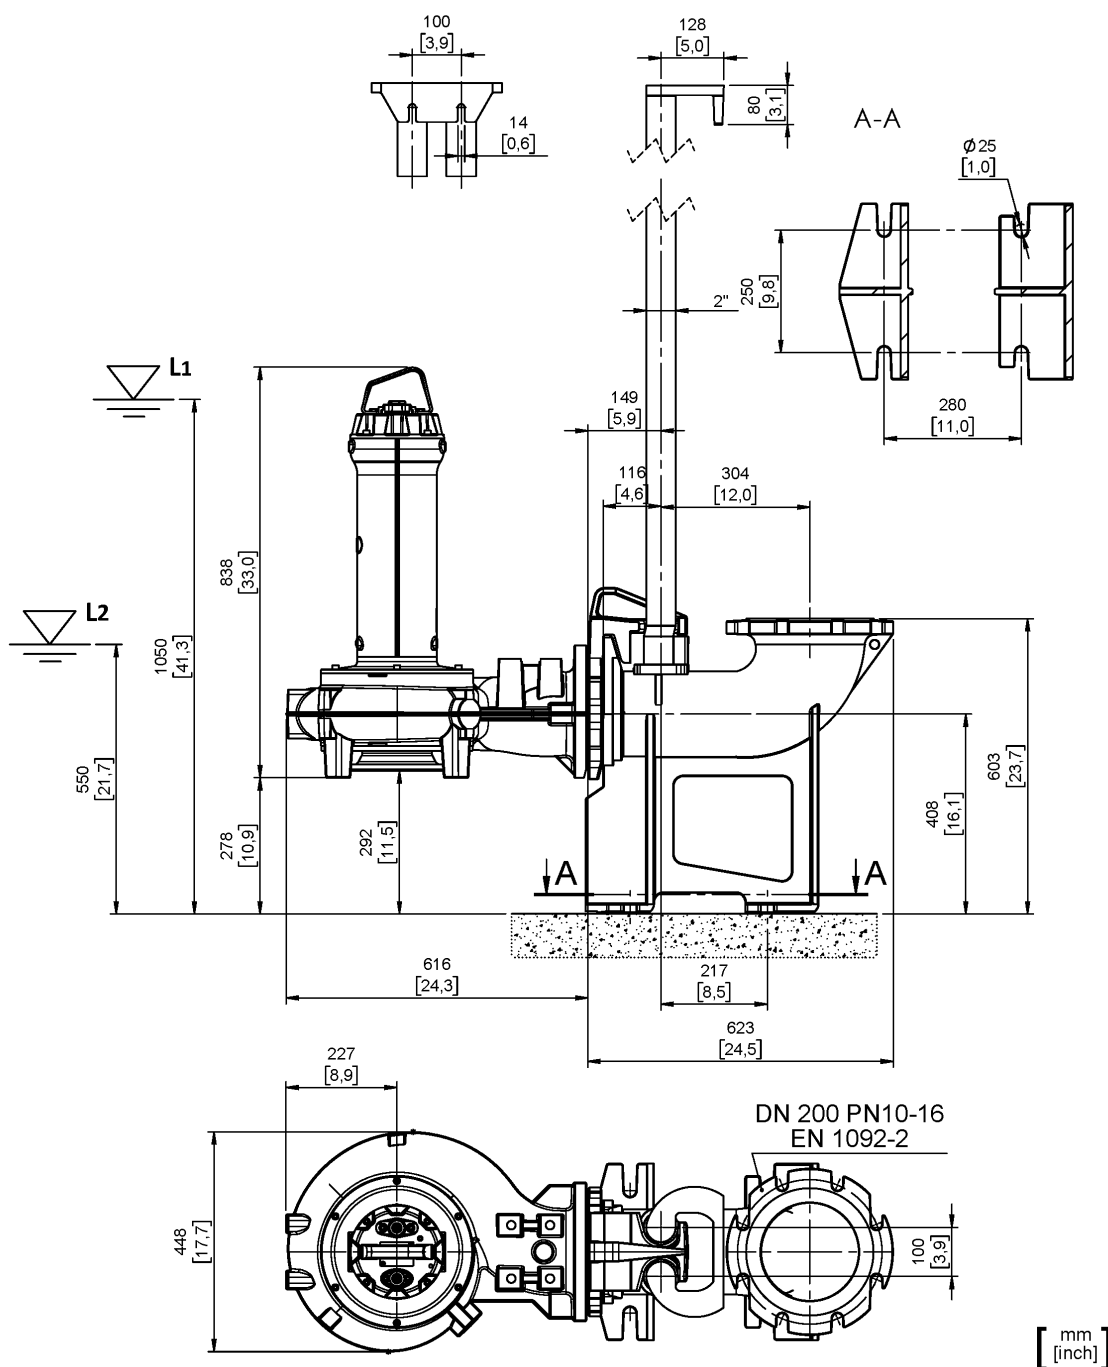

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use (only "WET" version)




water solutions

Data sheet


DRG 750/6/150 F0GT5

GREY
series

Technical specification

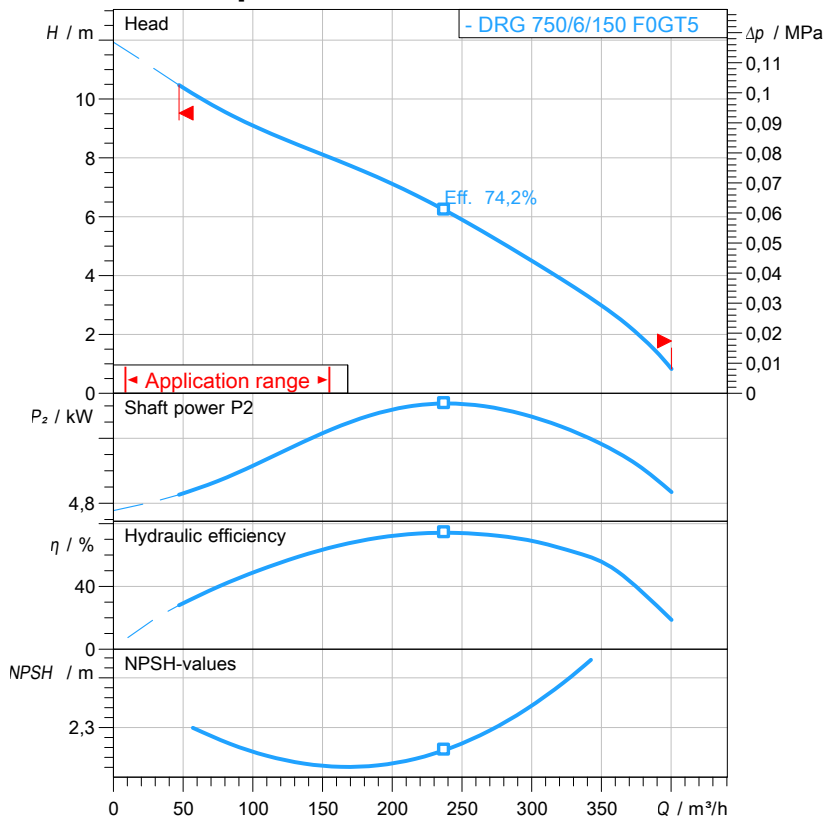3~ 50 Hz


Characteristic curves according to UNI EN ISO 9906:2012
P2 < 10kW: paragraph 4.4.2
10kW < P2 < 100kW: Grade 3B
P2 > 100kW: Grade 2B

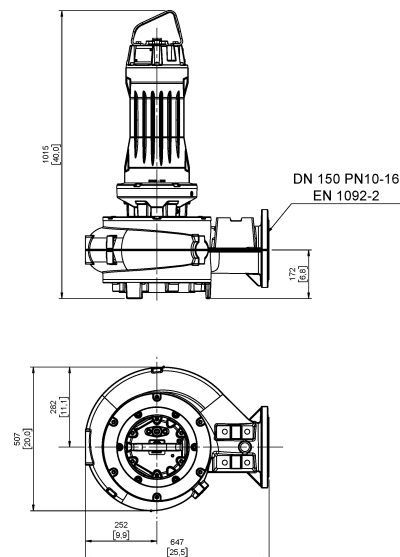

[mm (inch)]

Pump

Series	GREY series
Pump name	DRG 750/6/150 F0GT5
Configuration	NGTSB5104YN00NN
Standard	CE

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	6
Rated power P2	5,5 kW
Incoming power P1	6,62 kW
Rated current	12,8 A
rpm	948 1/min
Efficiency	83,1 %
cos φ	0,744
Rated torque	55,4 Nm
Start	Star-delta
Degree of protection	IP 68
Insulation class	H

Hydraulic

Type	DR (Multi-channel open)
Free passage	80 mm
Impeller type	Open channel impeller
Max. hydraulic efficiency	74,2 %
Suction	DN 200 UNDRILLED
Discharge	DN 150 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 200 µm sea water resistant
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features

Cooling system	No cooling jacket
Main cable	7G1,5 + 3x1
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	195 kg
Electrical variant	Thermal protection and leakage sensor

* cable, stand and guiding system excluded

Rev. 0 - 16-12-2014

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2019-03-05

zenit.com

Page 1 / 3



water solutions

Data sheet


DRG 750/6/150 F0GT5

GREY
series

Pump performance curves

3~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Open channel impeller	Free passage 80 mm	Discharge DN 150	Suction DN 200
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s

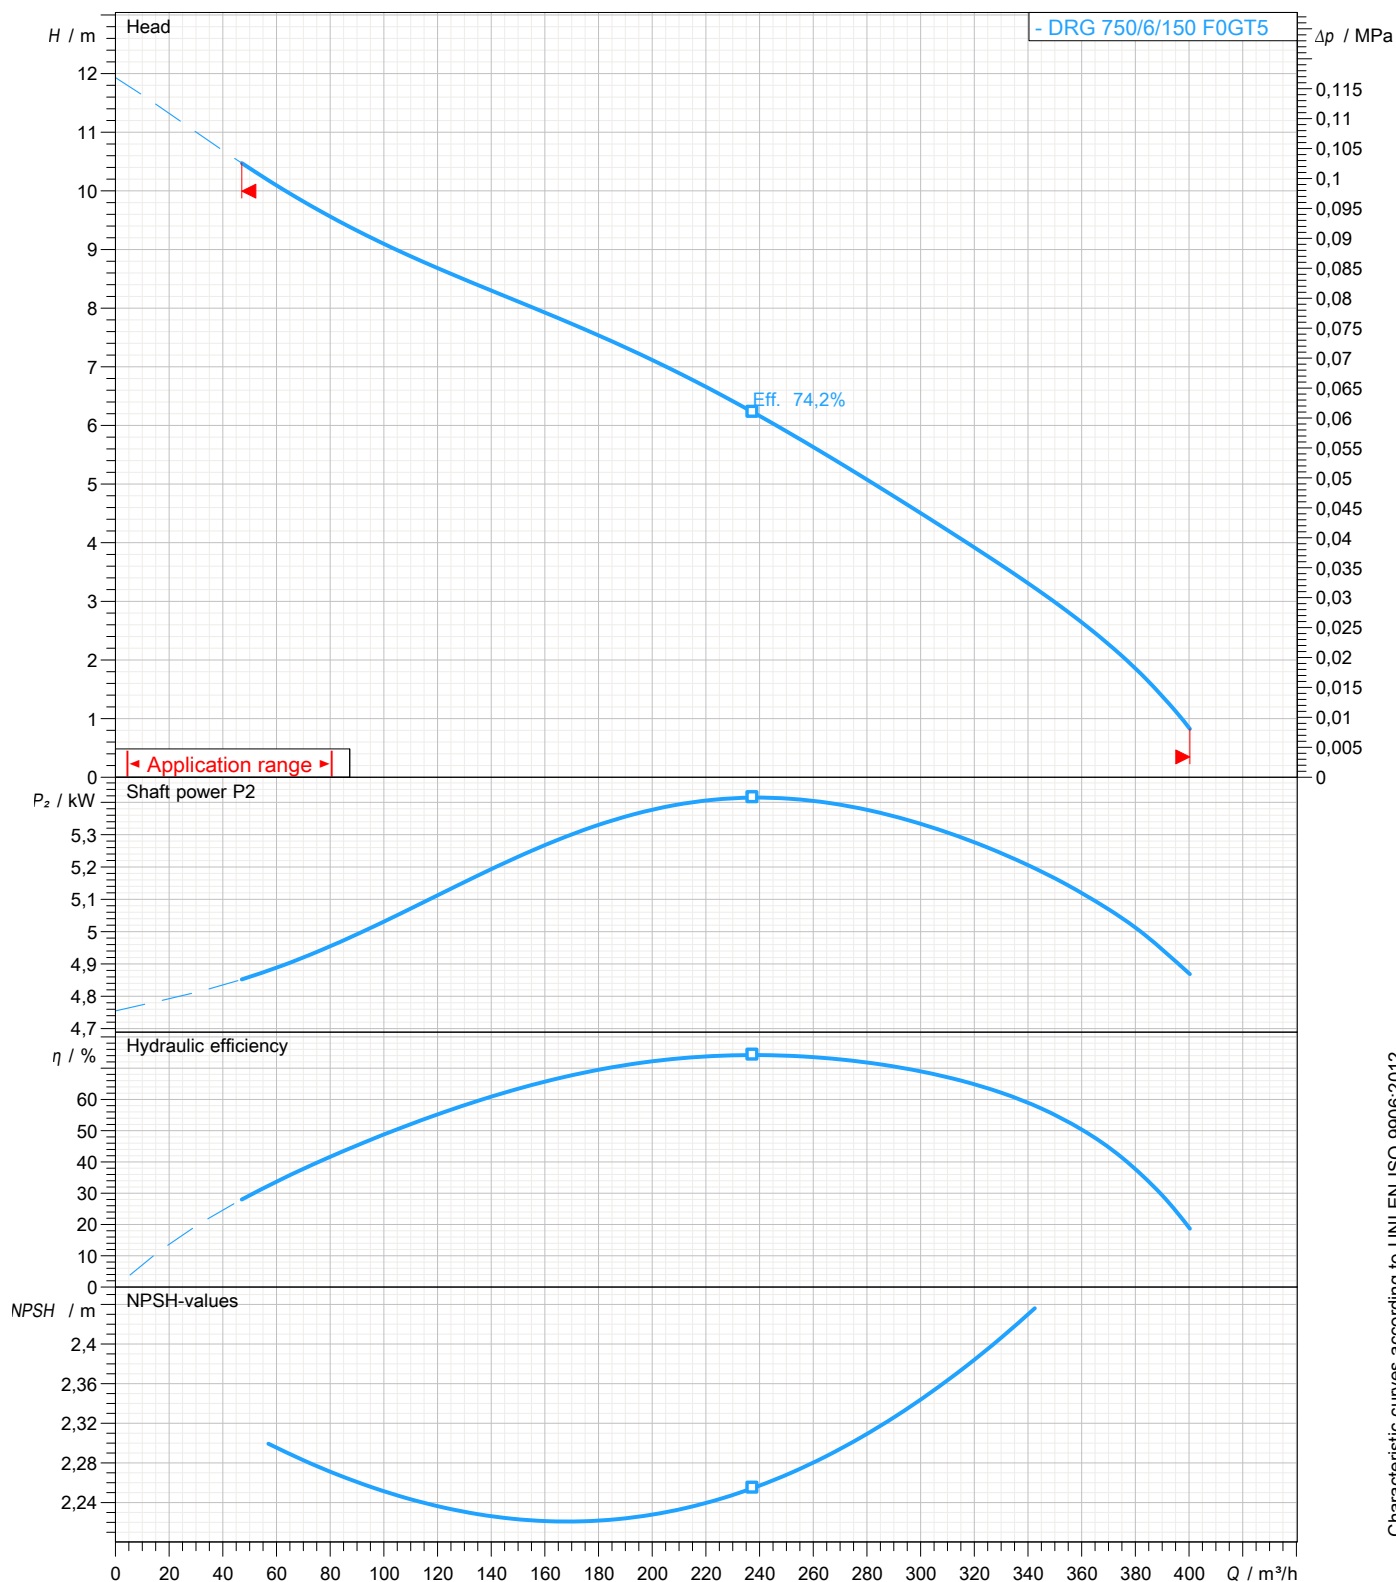

Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B



water solutions

Data sheet


DRG 750/6/150 F0GT5

GREY
series

Dimensional drawing

3~ 50 Hz

Installation type P: bottom coupling device - vertical discharge DN200 - guide pipes 2"		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 150 EN 1092-2	Suction: DN 200 UNDRILLED	Pressure rating (suction/discharge) -/PN 10
Accessory DAC 150/200V+KAF 116-2" EN (P)		Accessory code 9001.010
Note: Accessory must be ordered separately		

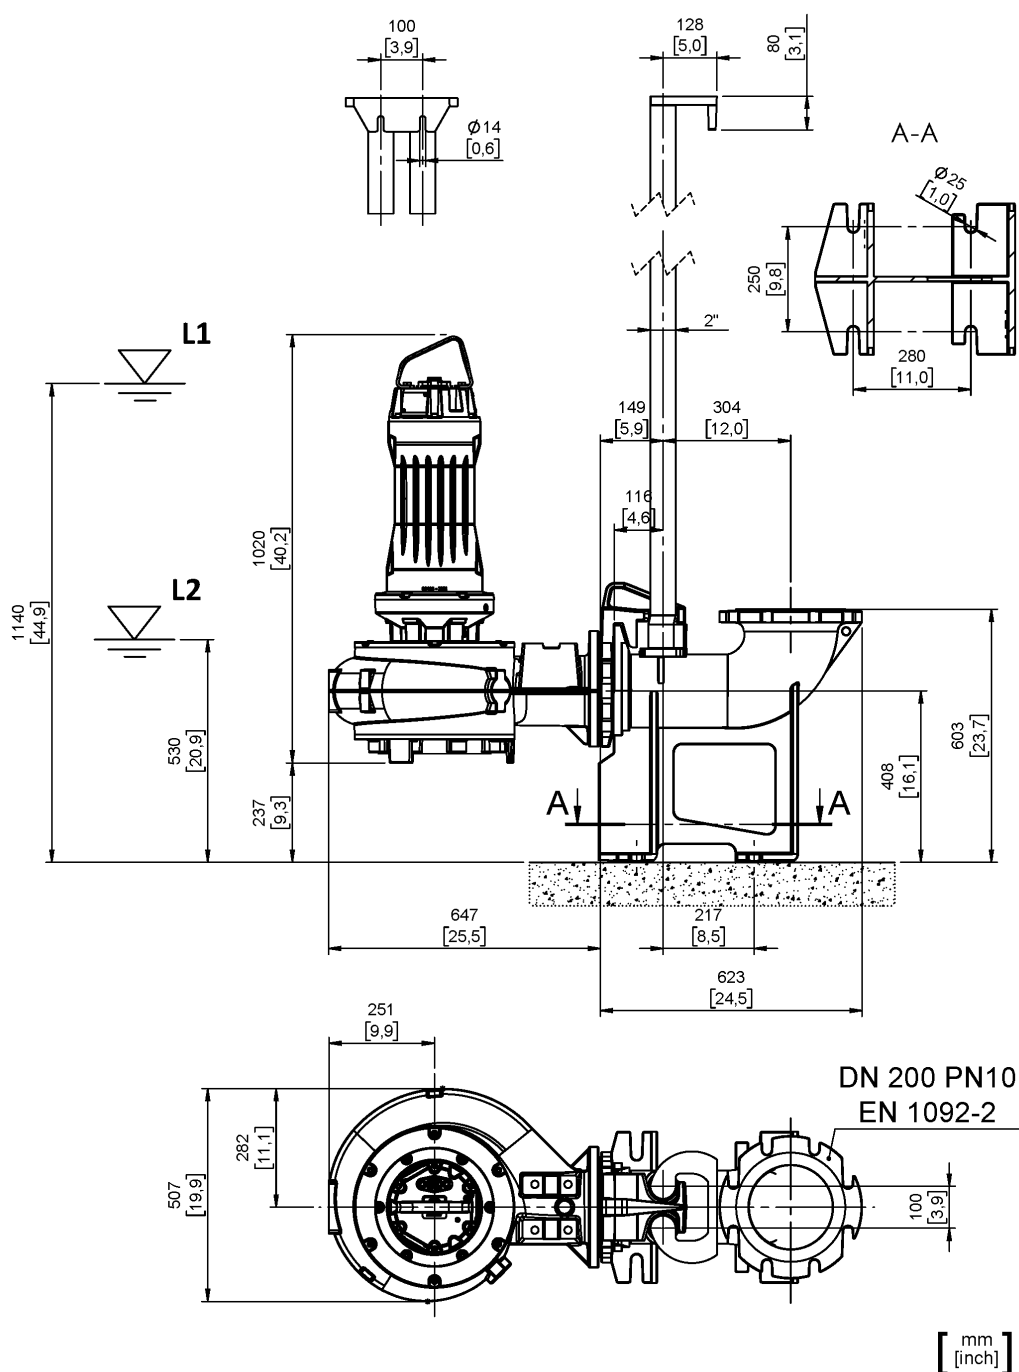

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use (only "WET" version)