


LIH-402 Data sheet




Capacity:	0,234 l/rev.
Connections:	DN-40
Max. Pressure:	< 12 bar
Lobe type:	Tri-lobe standard Dual wing (optional)
Soft solids sizes:	< 25 mm
Max. speed:	< 950 rpm
Max. temperature:	< 110°C
Weight (bare shaft):	28,9 kg.

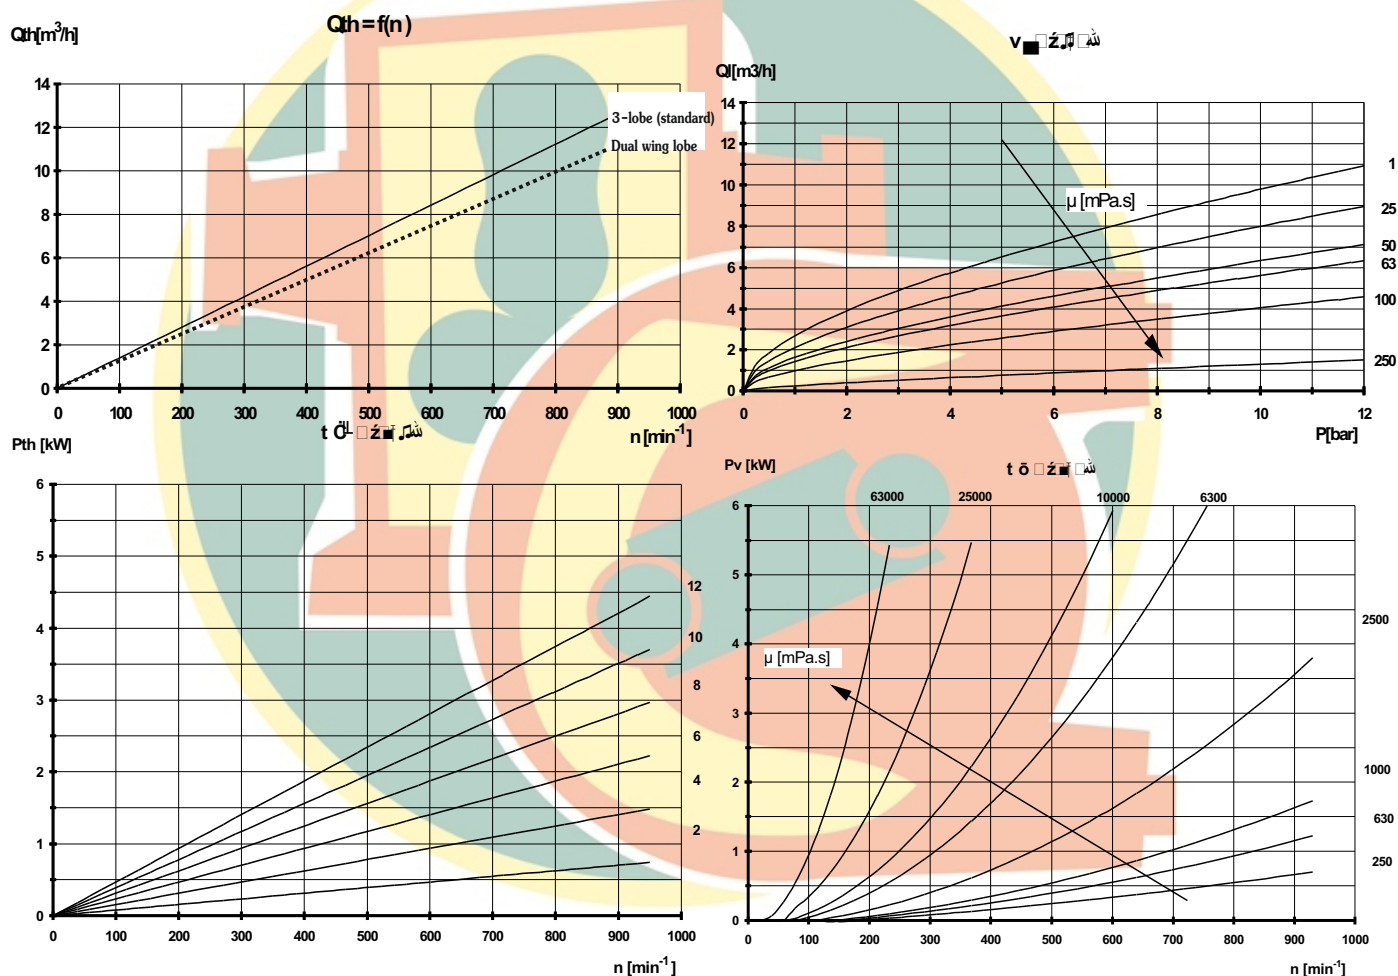

* Permissible tolerance $\pm 5\%$

Description	Material	Surface treatment
Pump housing	Stainless Steel AISI-316L	--
Lobes	Stainless Steel AISI-316L	--
Shafts	Stainless Steel AISI-329	
Mechanical seals	Carbon/Sic/EPDM Double mechanical seal (optional) Packing gland (Optional) Lip-seal (Optional)	
Gaskets	EPDM (Standard) Viton (Optional)	--

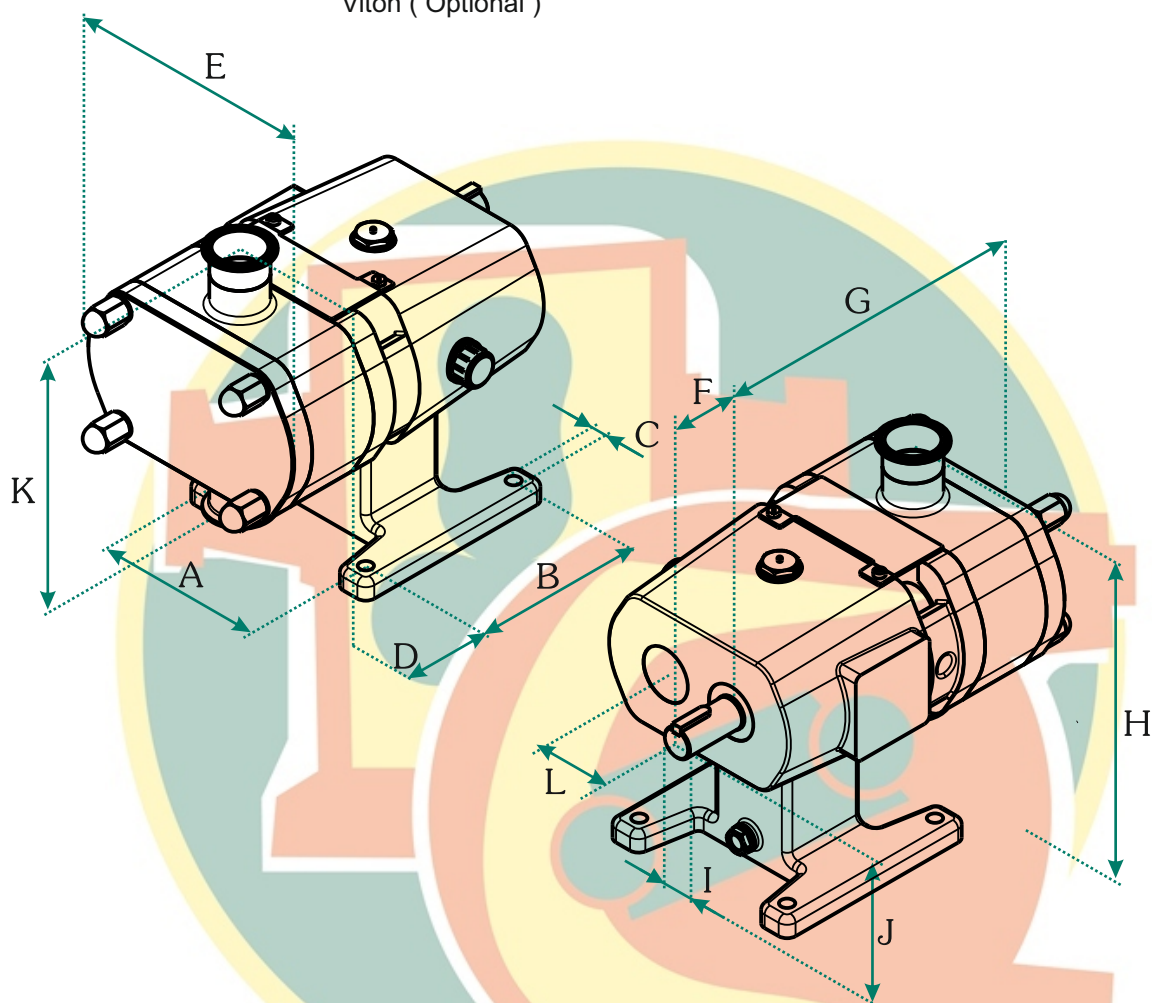

Dimensions

A	B	C	D	E	F	G	H	I	J	K	L	Connections
140	140	Ø11	52	195	50	288	266	Ø24	160	212	62	Tri-clamp 1 ½"




Bombas Boyser, S.L. C/. Narcís Monturiol, 24 · Pol. Ind. Can Magre
Telf.: 93 844 77 78 · 08187 Sta. Eulàlia de Ronçana (BARCELONA)
info@boyser.com · www.boyser.com



LIH-502 Data sheet




Capacity:	0,301 l/rev.
Connections:	DN-50
Max. Pressure:	< 7 bar
Lobe type:	Tri-lobe standard Dual wing (optional)
Soft solids sizes:	< 25 mm
Max. speed:	< 950 rpm
Max. temperature:	< 110°C
Weight (bare shaft):	29,2 kg.

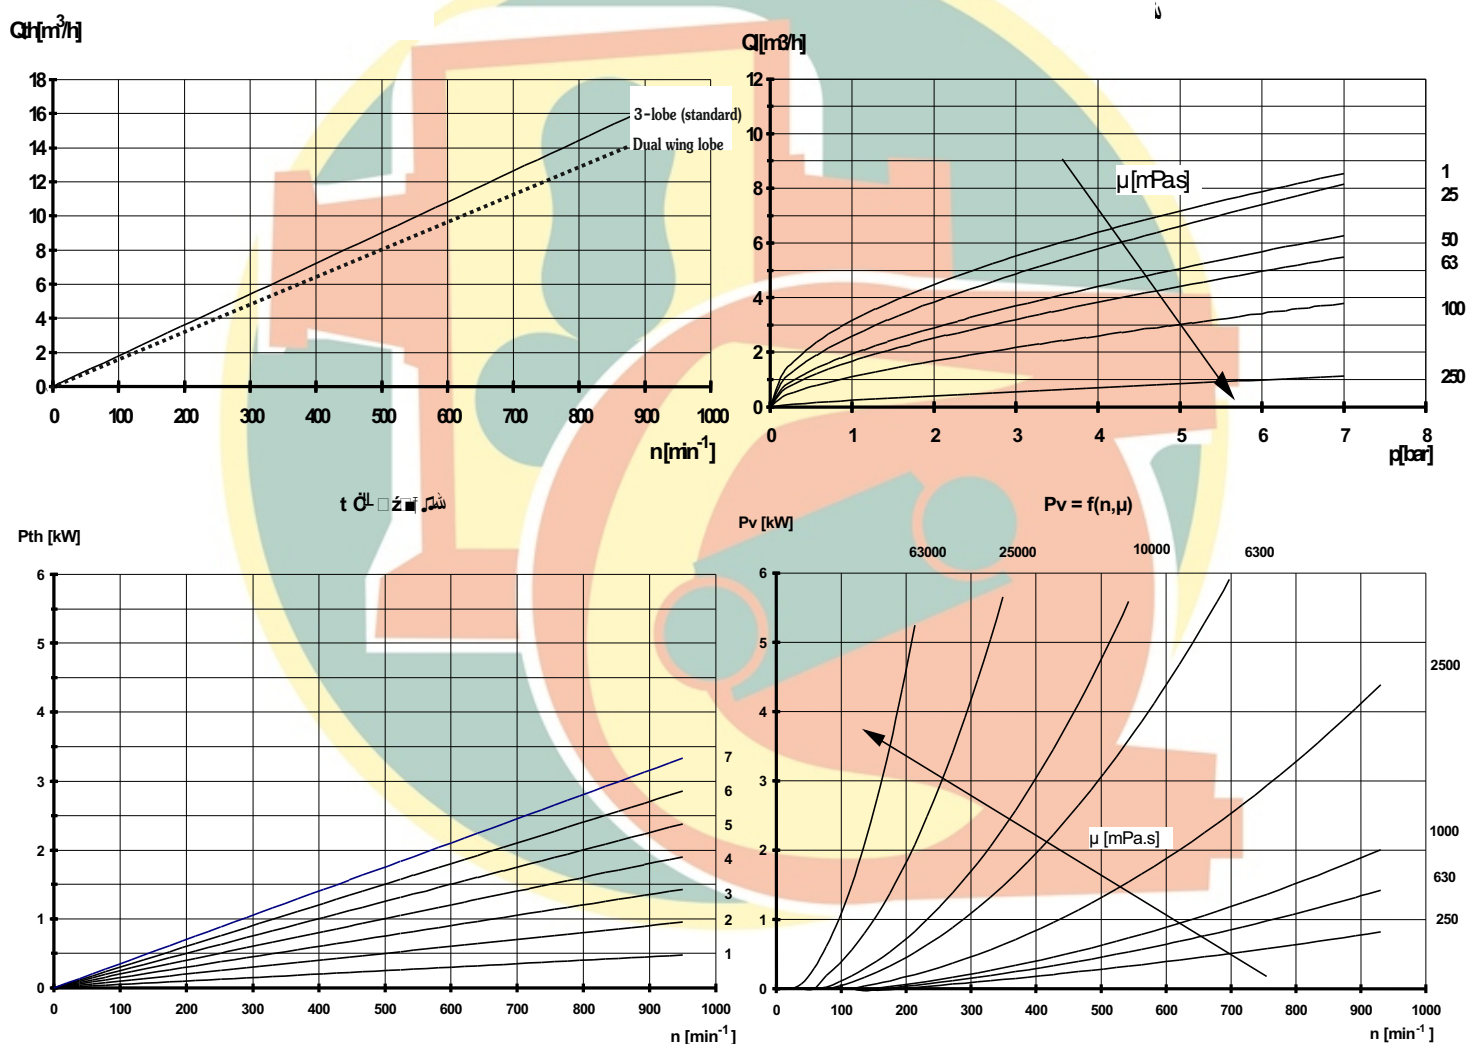

* Permissible tolerance $\pm 5\%$

Description	Material	Surface treatment
Pump housing	Stainless Steel AISI-316L	--
Lobes	Stainless Steel AISI-316L	--
Shafts	Stainless Steel AISI-329	
Mechanical seals	Carbon/Sic/EPDM Double mechanical seal (optional) Packing gland (Optional) Lip-seal (Optional)	
Gaskets	EPDM (Standard) Viton (Optional)	--

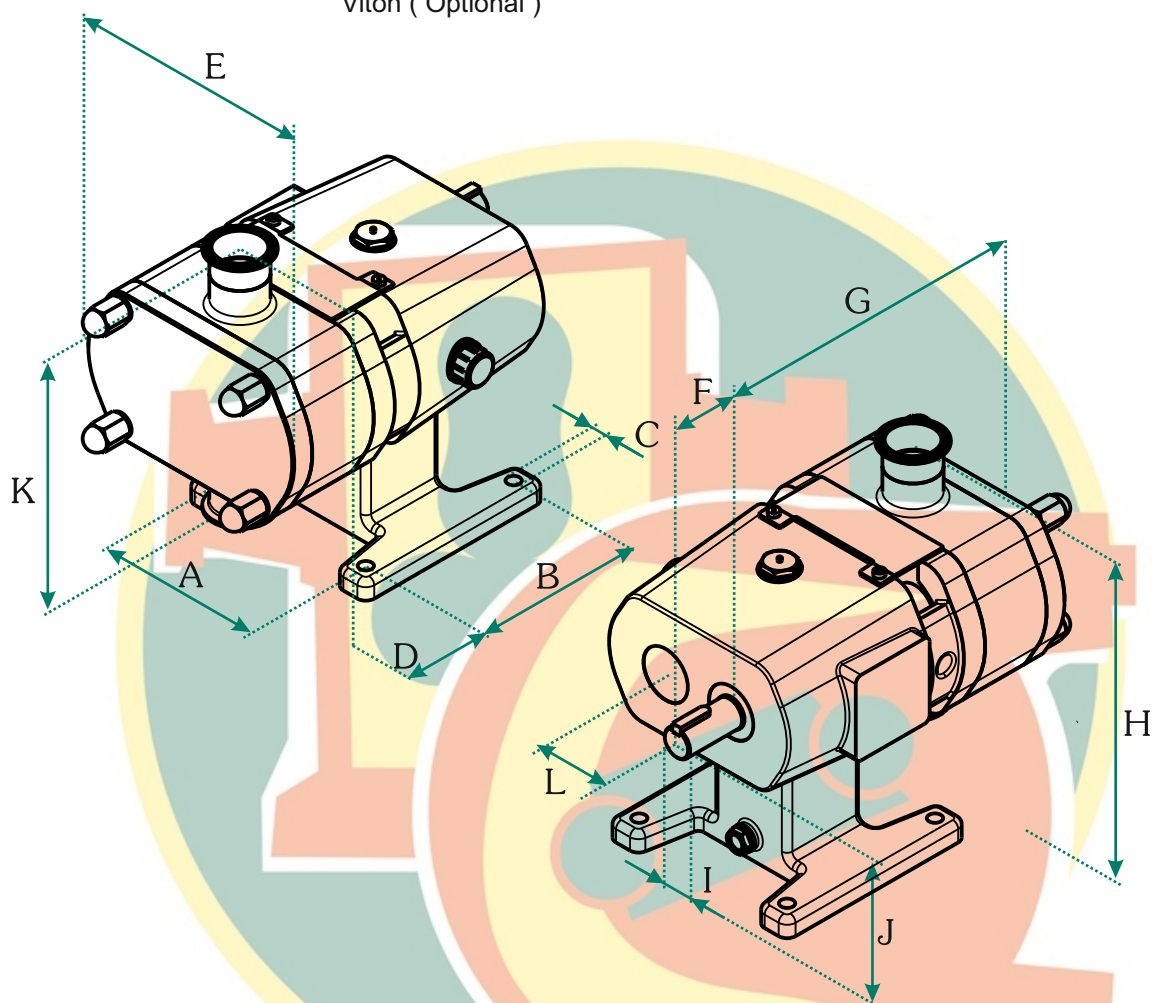

Dimensions

A	B	C	D	E	F	G	H	I	J	K	L	Connections
140	140	Ø11	58	195	50	300	266	Ø24	160	212	62	Tri-clamp 2"



Bombas Boyser, S.L. C/. Narcís Monturiol, 24 · Pol. Ind. Can Magre
Telf.: 93 844 77 78 · 08187 Sta. Eulàlia de Ronçana (BARCELONA)
info@boyser.com · www.boyser.com

