



Clean water



Domestic use

- ※ New version featuring an anti-locking system.
- ※ Noise levels reduced by 20%.



PERFORMANCE RANGE

- Flow rate up to **50 l/min** (3.0 m³/h)
- Head up to **70 m**

INSTALLATION AND USE

Designed to transfer clean water free from abrasive particles and liquids that will not damage the pump's components.

Compact, reliable, and cost-effective, they are ideal for domestic applications when paired with small autoclave tanks, and for irrigating gardens and orchards. They are also effective in drawing water from tanks and pumping liquids that contain air or gas. The pumps come equipped with a non-return check valve for suction.

APPLICATION LIMITS

- Manometric suction head up to **9 m** (HS)
- Liquid temperature between **-10 °C** and **+60 °C**
- Ambient temperature up to **+40 °C** (**+50 °C** for PKS 60)
- Maximum working pressure:
 - **6 bar** for PKS 60, PKS 65
 - **7 bar** for PKS 80

AVAILABLE UPON REQUEST


- ※ Mechanical seal options available
- ※ Different voltage or frequency

PATENTS - TRADE MARKS - MODELS

- Motor bracket: Patent No. IT1243605

CURVES AND PERFORMANCE DATA – HS=0 m

60 Hz

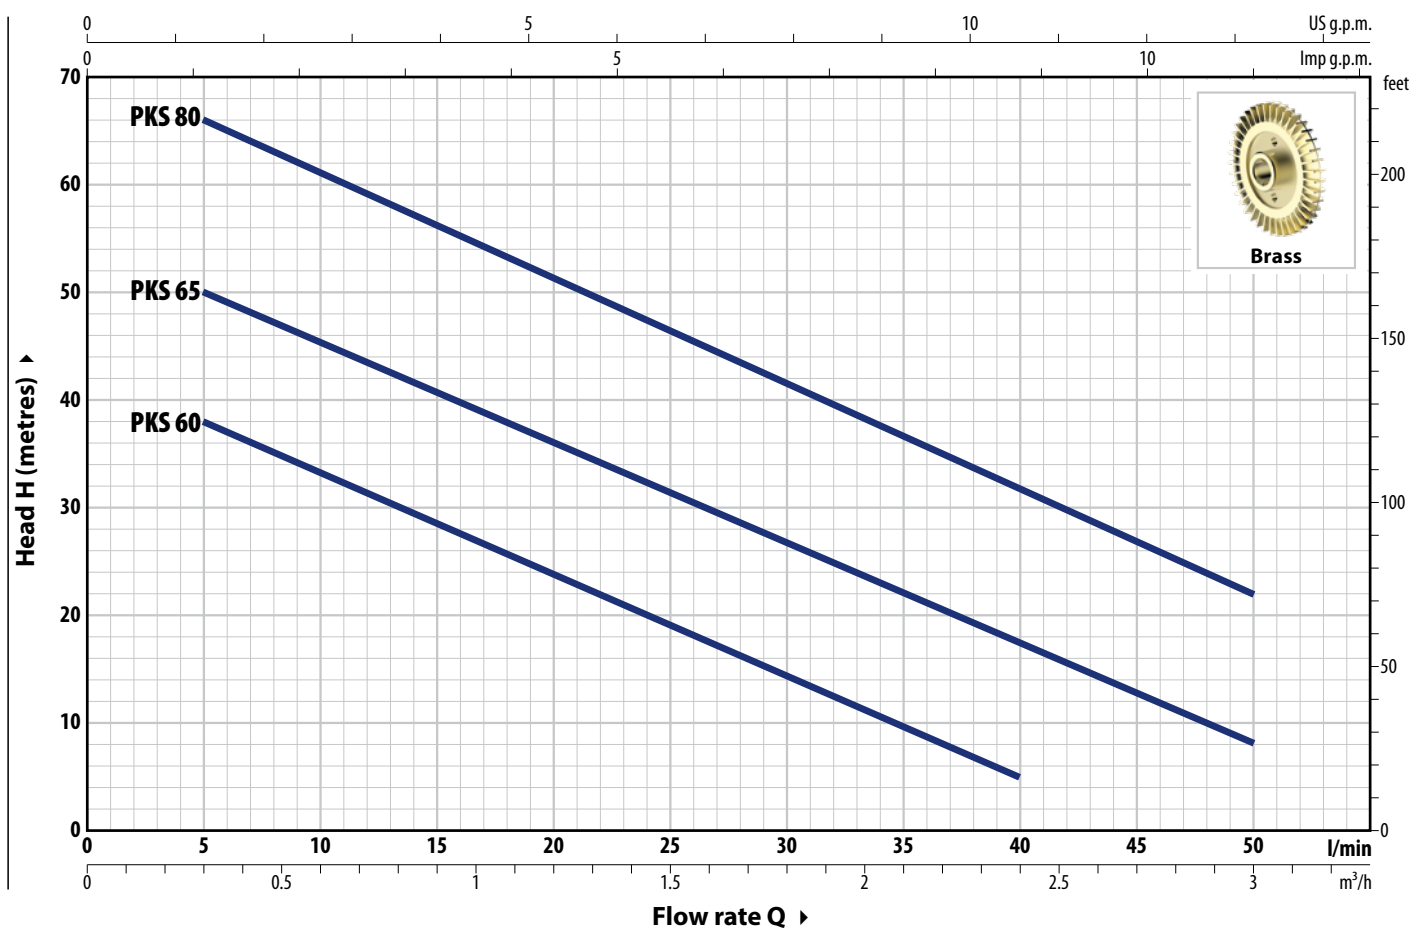


TYPE		POWER (P ₂)		3~	Q	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0
Single-ph.	Three-ph.	kW	HP			0	5	10	15	20	25	30	35	40	45	50
PKSm 60	PKS 60	0.37	0.50	IE2	H m	40	38	33.5	29	24	19.5	15	10	5		
PKSm 65	PKS 65	0.55	0.75			55	50	45.5	40.5	36	31	27	22	17	12.5	8
PKSm 80	PKS 80	0.75	1	IE3		70	66	61	56	51	46	41	36.5	31	27	22

Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

EXAMPLE OF INSTALLATION

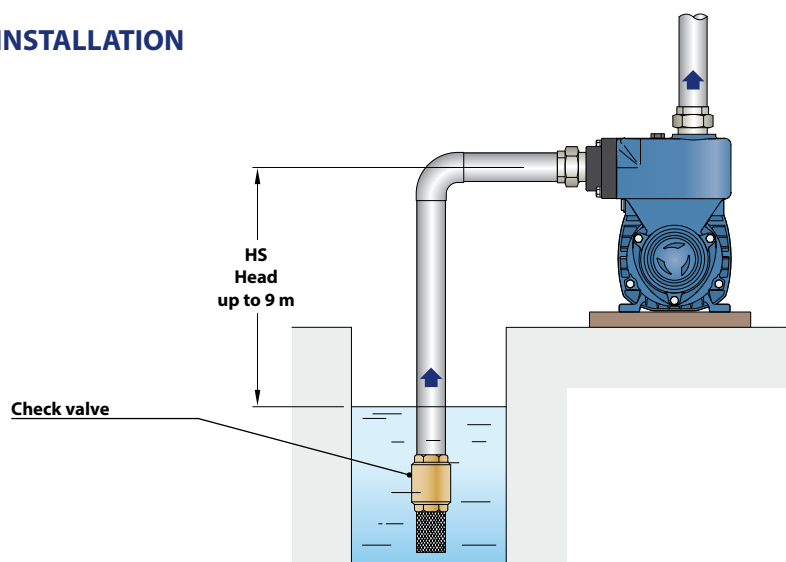


ABSORPTION

TYPE	VOLTAGE	
	220 V	110 V
PKSm 60	2.6 A	5.5 A
PKSm 65	5.8 A	11.5 A
PKSm 80	6.5 A	13.0 A

TYPE	VOLTAGE			
	220 V - Δ	380 V - Δ	220 V - Δ	440 V - Δ
PKS 60	2.0 A	1.15 A	2.1 A	1.2 A
PKS 65	3.2 A	1.9 A	3.5 A	2.0 A
PKS 80	3.8 A	2.2 A	4.3 A	2.4 A

DIMENSIONS AND WEIGHT

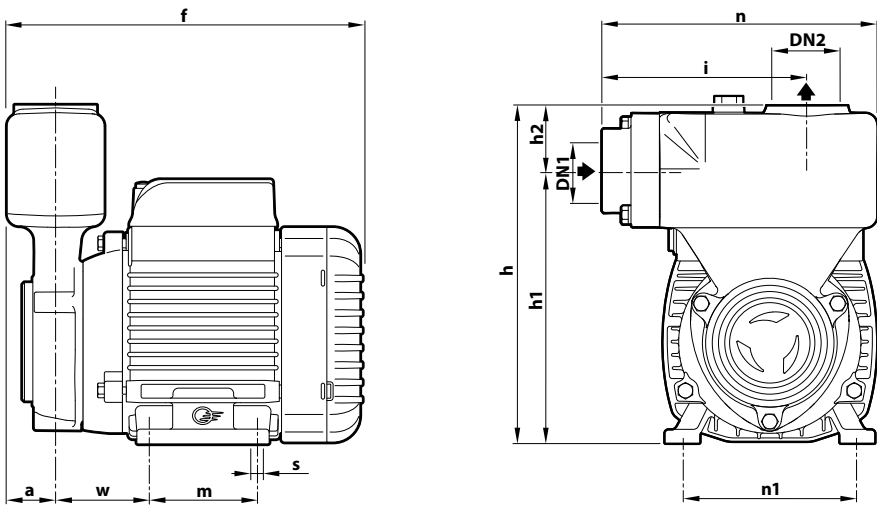

TYPE		PORTS		DIMENSIONS mm											kg	
Single-ph.	Three-ph.	DN1	DN2	a	f	h	h1	h2	i	m	n	n1	w	s	1~	3~
PKSm 60	PKS 60	1"	1"	28	196	183	149	34	110	55	148	93-100	53	7	5.6	5.6
PKSm 65	PKS 65				227	190	156			80					7.6	6.9
PKSm 80	PKS 80				263	198	164			90	160	112	62		10.6	10.6

PALLET CAPACITY

TYPE		GROUPAGE	CONTAINER
Single-ph.	Three-ph.	n. pumps	n. pumps
PKSm 60	PKS 60	224	288
PKSm 65	PKS 65	168	216
PKSm 80	PKS 80	96	144

CONSTRUCTION FEATURES

1 Pump body Cast iron with ISO 228/1 threaded ports

2 Check valve Built-in check valve in the inlet port

3 Motor bracket Aluminum with brass cover and front scraping anti-locking function (patented)

4 Impeller Brass, radial peripheral vane type

5 Mechanical seal	Seal	Shaft	Materials
	AR-12	Ø 12 mm	Ceramic / Graphite / NBR

6 Motor shaft Stainless steel **AISI 431** (EN 10088-3 - 1.4104 for PKS 60, PKS 65)

7 Electric motor

PKSm: single-phase 220 V - 60 Hz with winding integrated thermal motor protection.
PKS: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz

- The three-phase pumps are fitted with high performance motors up to P2=0.55 kW in class **IE2** and from P2=0.75 kW in class **IE3** (IEC 60034-30-1)
- Continuous running duty **S1**
- Insulation: class F
- Protection rating: IPX4

