



Clean water



Industrial use

※ Electric pumps for industrial use



PERFORMANCE RANGE

- Flow rate up to **50 l/min** (3.0 m³/h)
- Head up to **100 m**

INSTALLATION AND USE

Designed for pumping diesel/naphtha and **clean water** free from abrasive particles and non-corrosive liquids that do not harm the pump's components.

Their hydraulic characteristics, compactness, and small size make them ideal for industrial applications such as chillers, air conditioners, coolers, and boiler feed systems.

PUMP BODY

The **pump body** is made of **CW617N brass**, which guarantees protection against rust and oxidation.

APPLICATION LIMITS

- Manometric suction head up to **8 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Ambient temperature between **-10 °C** and **+40 °C**
- Maximum working pressure **10 bar**

AVAILABLE UPON REQUEST


- ※ Mechanical seal options available
- ※ Protection rating IP 55 (only for PQ81-Bs and PQ65-Bs)
- ※ Different voltage or frequency

PATENTS - TRADE MARKS - MODELS

- Motor bracket: Patent No. IT1243605
- Community Model No. 009068877-0001

CURVES AND PERFORMANCE DATA – HS=0 m

60 Hz

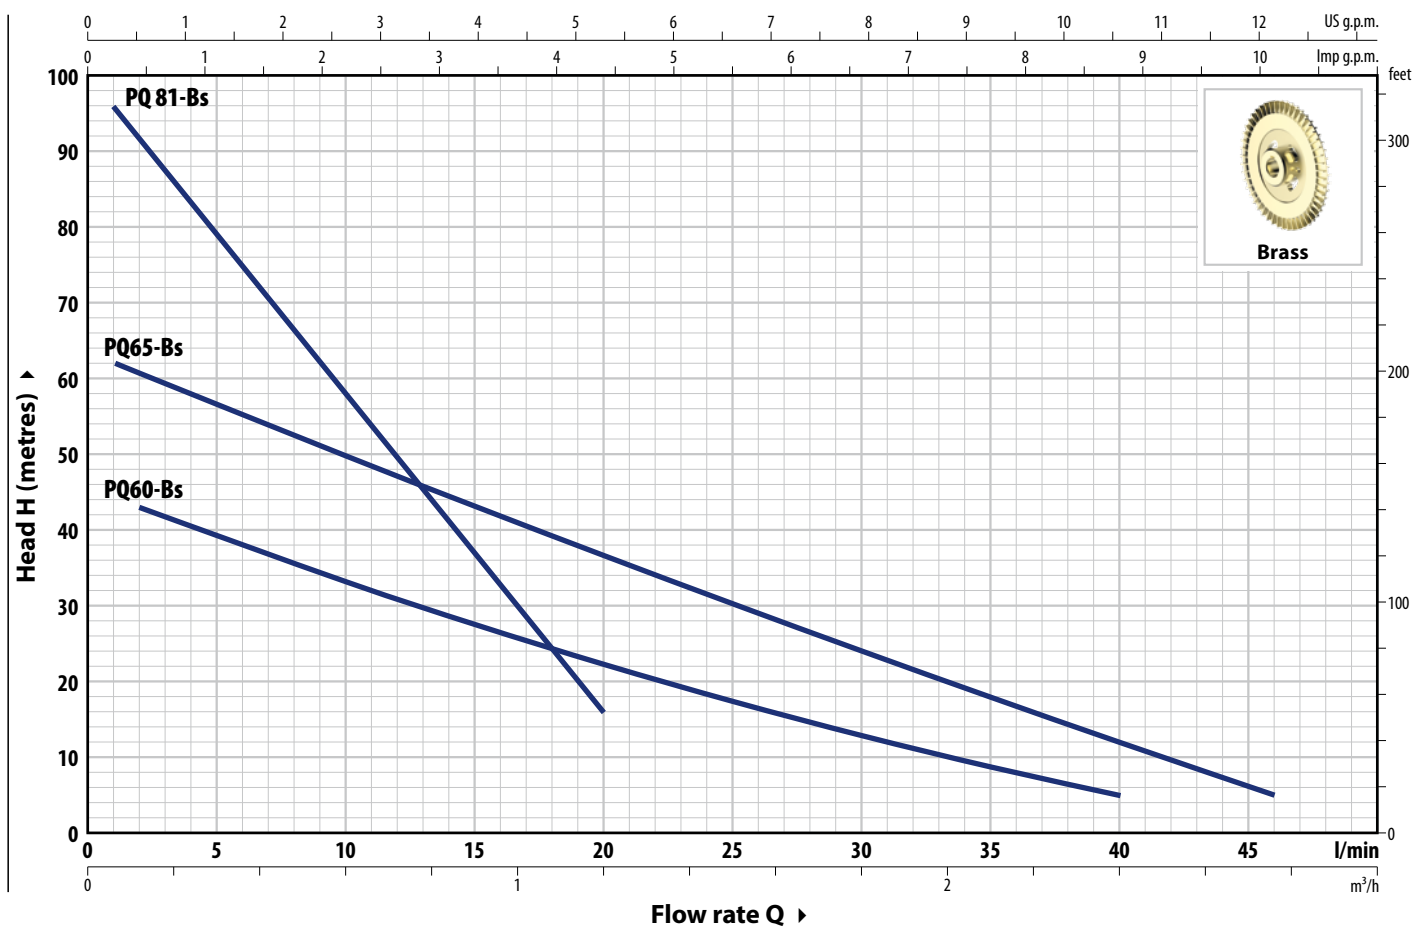

TYPE		POWER (P ₂)		3~	Q	m³/h													
Single-ph.	Three-ph.	kW	HP			0	0.06	0.12	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.76		
						0	1	2	5	10	15	20	25	30	35	40	46		
PQm 60-Bs	PQ 60-Bs	0.37	0.50	IE3	H m	45.5	–	43	39	33	27.5	22.3	17.4	12.9	8.8	5			
PQm 65-Bs	PQ 65-Bs	0.55	0.75			63	62	60.5	56.5	49.5	43	36.5	30	24	18	12	5		
PQm 81-Bs	PQ 81-Bs	0.55	0.75			100	96	92	79	58	37	16							

Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

ABSORPTION


TYPE	VOLTAGE	
	220 V	110 V
PQm 60-Bs	2.8 A	5.6 A
PQm 65-Bs	5.0 A	10.0 A
PQm 81-Bs	4.3 A	8.6 A

TYPE	VOLTAGE			
	220 V - Δ	380 V - Δ	220 V - Δ	440 V - Δ
PQ 60-Bs	2.0 A	1.15 A	2.1 A	1.2 A
PQ 65-Bs	3.1 A	1.8 A	2.7 A	1.6 A
PQ 81-Bs	2.8 A	1.6 A	2.6 A	1.5 A


PQ-Bs

DIMENSIONS AND WEIGHT

PQ 60-Bs

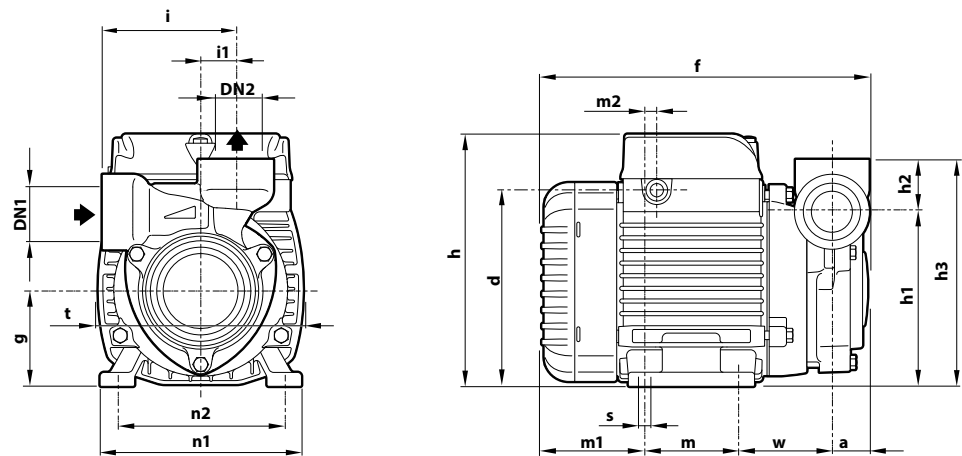

PQ 65-Bs – PQ 81-Bs

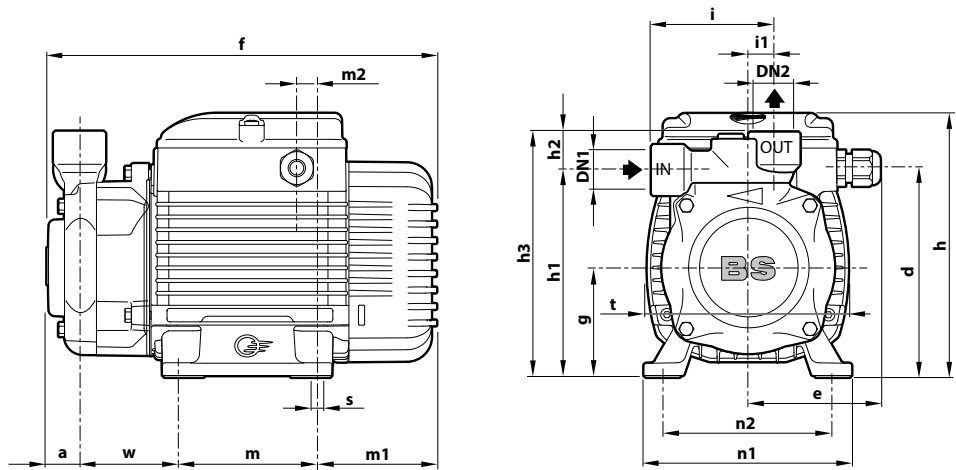

TYPE		PORTS		DIMENSIONS mm																		kg		
Single-ph.	Three-ph.	DN1	DN2	a	d	e	f	g	h	h1	h2	h3	i	i1	m	m1	m2	n1	n2	t	w	s	1~	3~
PQm 60-Bs	PQ 60-Bs	¾"	¾"	21.5	112	–	192	56	145.5	101		131			55	62	8	116		118			5.0	5.0
PQm 65-Bs	PQ 65-Bs			24			226			108	30	138	76	20					100		53.5	7	7.0	6.4
PQm 81-Bs	PQ 81-Bs	½"	½"	18	119.5	76.5	223	63	153	119	22	141	71	15	80	69	8.5	120		117	55		6.9	6.9

PALLET CAPACITY

TYPE		GROUPAGE	CONTAINER
Single-ph.	Three-ph.	n. pumps	n. pumps
PQm 60-Bs	PQ 60-Bs	238	306
PQm 65-Bs	PQ 65-Bs	216	270
PQm 81-Bs	PQ 81-Bs	160	200

CONSTRUCTION FEATURES

1 Pump body	Brass with ISO 228/1 threaded ports	
2 Motor bracket	Aluminium with brass cover with anti-lock front shim function (patented)	
3 Impeller	Brass, radial peripheral vane type	
4 Mechanical seal	Type	Materials
	ST1-12	Silicon carbide / Graphite / NBR
5 Motor shaft	Stainless steel AISI 431	
6 Electric motor	PQm-Bs: single-phase 220 V - 60 Hz with winding integrated thermal motor protection PQ-Bs: three-phase 220/380 V - 60 Hz or 220/440 V - 60 Hz – The three-phase pumps are fitted with high performance motors in class IE3 (IEC 60034-30-1) – Continuous running duty S1 – Insulation: class F – Protection rating: IPX4	

