



Dirty water



Domestic use

PERFORMANCE RANGE

- Flow rate up to **400 l/min** (24 m³/h)
- Head up to **11 m**

INSTALLATION AND USE

ZXm 1 pump is designed for **dirty water** and sewage drainage in **domestic settings**, capable of handling suspended solids up to **40 mm in diameter**. It's easy to operate and reliable in automated fixed installations.

INCLUDES

- ✂ **5 m** power cable
- ✂ Float switch

APPLICATION LIMITS


- Depth below water level up to **5 m** (with an appropriately sized power cable)
- Liquid temperature up to **+40 °C**
- Capable of processing suspended solids up to **Ø 40 mm**
- Draining capability up to **50 mm** from the bottom
- **Minimum immersion for continuous service: 240 mm**

AVAILABLE UPON REQUEST

- ✂ Pumps with **10 m** power cable.
- ✂ Different voltage or frequency

CURVES AND PERFORMANCE DATA

60 Hz

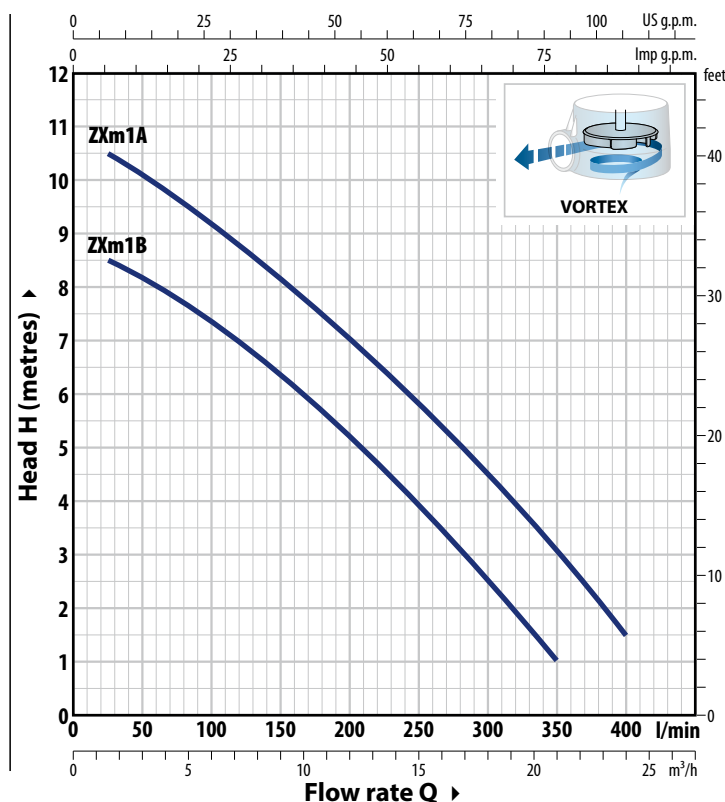

ABSORPTION

TYPE	VOLTAGE	
	220 V	110 V
Single-phase		
ZXm 1B/40	3.6 A	7.2 A
ZXm 1A/40	5.0 A	10.0 A


TYPE	POWER (P ₂)		Q										
	kW	HP		m ³ /h	0	1.5	3.0	4.5	6.0	9.0	12.0	15.0	18.0
Single-phase				l/min	0	25	50	75	100	150	200	250	300
ZXm 1B/40	0.50	0.70	H m		9	8.5	8.3	8	7.5	6.5	5.2	4	2.5
ZXm 1A/40	0.60	0.85			11	10.5	10	9.5	9.2	8.2	7	5.7	4.3
													2.8
													1.5

Q = Flow rate H = Total manometric head




Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

MATERIALS AND COMPONENTS

1 Pump body	Cast iron with ISO 228/1 threaded port		
2 Base	Stainless steel AISI 304		
3 Impeller	VORTEX technopolymer type		
4 Outer sleeve	Stainless steel AISI 304		
5 Motor sleeve	Steel		
6 Motor shaft	Stainless steel AISI 431		
7 Double shaft seal			
Seal	Shaft	Materials	
STA-12R	Ø 12 mm	Ceramic / Graphite / NBR	
Sealing ring	Ø 12 x Ø 22 x H 6 mm		
8 Capacitor			
9 Electric motor	Single-phase 220 V - 60 Hz or 110 V - 60 Hz with winding integrated thermal motor protection – Insulation: class F – Protection rating: IP X8		
10 Power cord	Type 'H07 RN-F' with Schuko plug ※ Standard length 5 metres		
11 Float switch			
12 Hose holder (included in delivery)	Ø 50 mm		

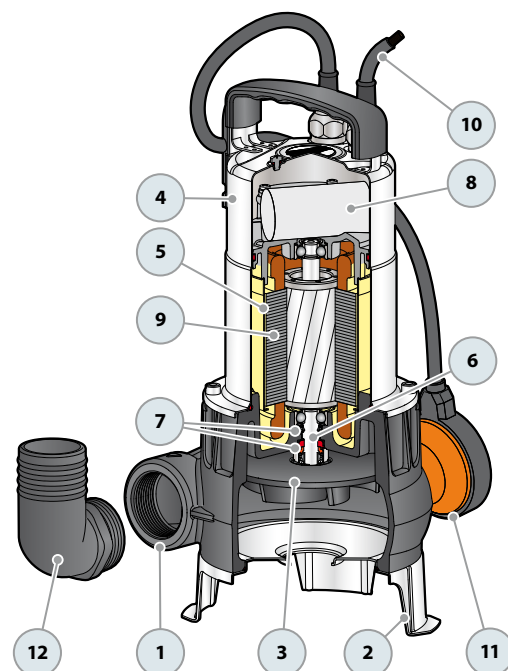

DIMENSIONS AND WEIGHT

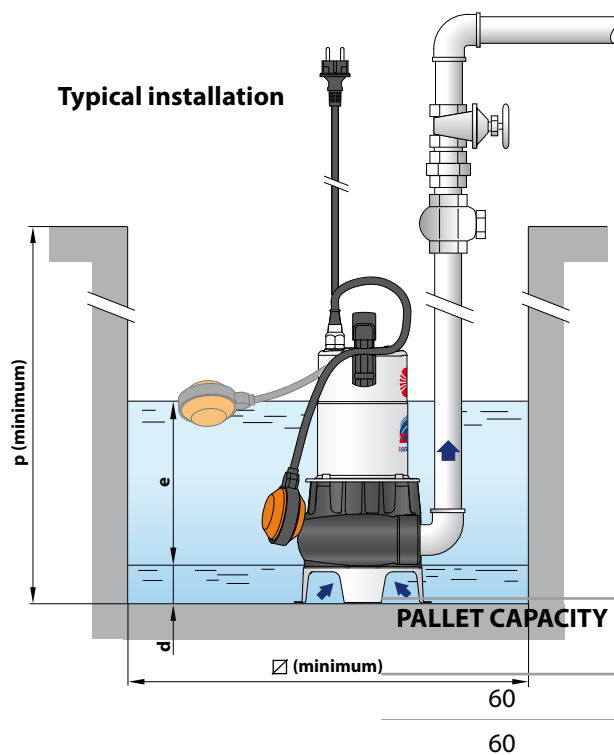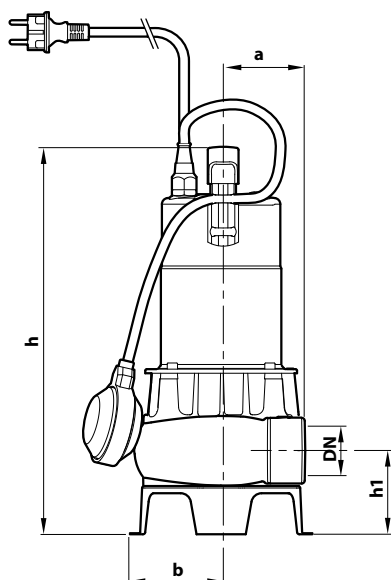

TYPE	PORT	Passage of solid bodies	DIMENSIONS mm									kg
			a	b	c	h	h1	d	e	p	∅	
Single-phase	DN											1~
ZXm 1B/40	1½"	Ø 40 mm	75	89	130	378	82	50	adjustable	450	450	11.6
ZXm 1A/40												12.0

GROUPAGE	CONTAINER
n. pumps	n. pumps
60	80
60	80