




Clean water



Civil use



Industrial use

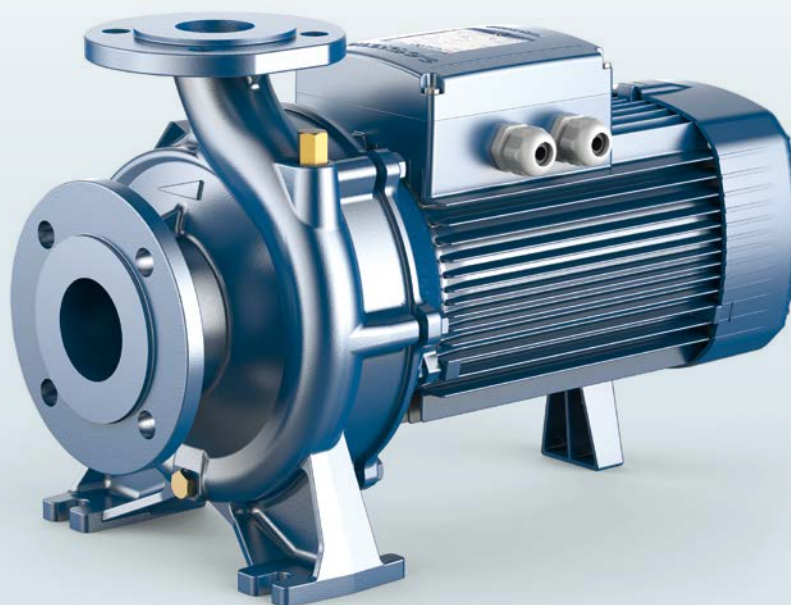

PERFORMANCE RANGE

- Flow rate up to **5750 l/min** (345 m³/h)
- Head up to **98 m**
- Power from **1.5 to 75 kW**

INSTALLATION AND USE

Close-coupled centrifugal electric pumps with flanges constructed according to the EN733 standard.

- For clean water free from abrasive particles and liquids that will not damage the pump's components
- Water supply
- Pressurization
- Irrigation
- Water circulation in air conditioning systems
- Power washing systems
- Firefighting systems
- Industrial applications
- Agriculture applications

Installation should be carried out in well-ventilated indoor or protected areas.

ELECTRIC MOTOR

The three-phase pumps are equipped with newly developed electric motors designed to work with inverters, which guarantee stable and quiet operation.

Efficiency class **IE3** for three-phase motors, **IE2** for single-phase motors, class F insulation and IP55 protection.

APPLICATION LIMITS

- Manometric suction head up to **7 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Ambient temperature between **-10 °C** and **+40 °C**
- Maximum pressure in the pump body **10 bar** (PN10)


AVAILABLE UPON REQUEST

- ✘ Mechanical seal options available
- ✘ Different voltage requirements 60 Hz frequency
- ✘ Handling of liquids with higher or lower temperatures
- ✘ Adaptability to operate in high or low temperature environments
- ✘ Counterflange KIT including screws, nuts and gaskets



PERFORMANCE RANGE – n= 2900 min⁻¹

50 Hz

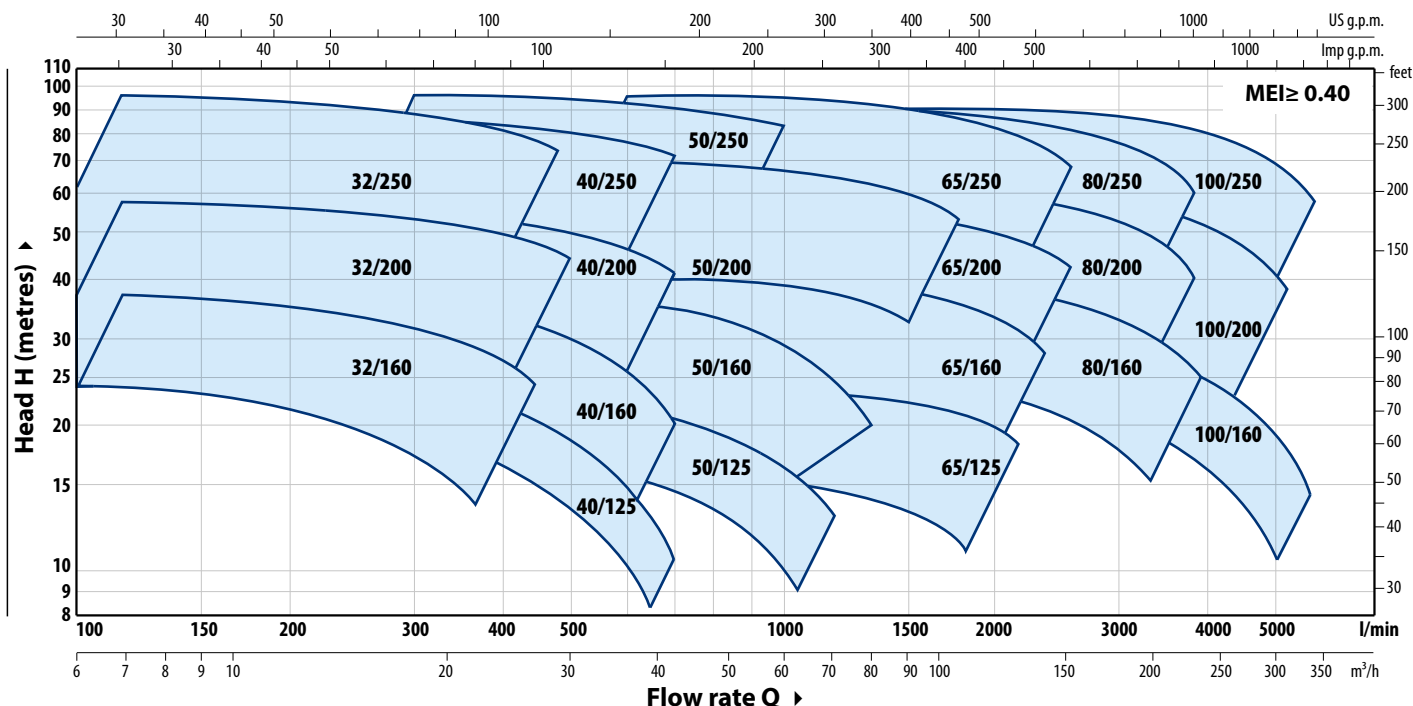

PERFORMANCE DATA – n= 2900 min⁻¹

50 Hz

TYPE	POWER (P ₂)		PERFORMANCE	
	kW	HP	Q l/min	H metres
F 32/160C	1.5	2	100 – 350	24 – 14
F 32/160B	2.2	3	100 – 400	30 – 17
F 32/160A	3	4	100 – 450	37 – 24
F 32/200C	4	5.5	100 – 450	44 – 31.5
F 32/200B	5.5	7.5	100 – 500	51 – 36
F 32/200A	7.5	10	100 – 500	57 – 44
F 32/200BH	3	4	100 – 300	45 – 37
F 32/200AH	4	5.5	100 – 320	55 – 44
F 32/250C	9.2	12.5	100 – 450	75 – 60
F 32/250B	11	15	100 – 500	87 – 70
F 32/250A	15	20	100 – 500	97 – 80
F 40/125C	1.1	1.5	100 – 550	16 – 6
F 40/125B	1.5	2	100 – 600	20.5 – 9
F 40/125A	2.2	3	100 – 700	26 – 10
F 40/160C	2.2	3	100 – 600	27 – 14
F 40/160B	3	4	100 – 600	32 – 20
F 40/160A	4	5.5	100 – 700	38 – 20
F 40/200B	5.5	7.5	100 – 700	47 – 28
F 40/200A	7.5	10	100 – 700	55 – 41
F 40/250C	9.2	12.5	100 – 700	64 – 47
F 40/250B	11	15	100 – 700	71 – 55
F 40/250A	15	20	100 – 700	88 – 72
F 50/125C	2.2	3	300 – 1100	17.5 – 6
F 50/125B	3	4	300 – 1200	20.7 – 9
F 50/125A	4	5.5	300 – 1200	23.5 – 13
F 50/160C	4	5.5	300 – 1000	27 – 16
F 50/160B	5.5	7.5	300 – 1200	32 – 18
F 50/160A	7.5	10	300 – 1350	37.5 – 20
F 50/200C	11	15	400 – 1700	44 – 30
F 50/200B	15	20	400 – 1700	52 – 38
F 50/200A	18.5	25	400 – 1800	61 – 45
F 50/200AR	22	30	400 – 1800	69 – 53


TYPE	POWER (P ₂)		PERFORMANCE	
	kW	HP	Q l/min	H metres
F 50/250D	9.2	12.5	300 – 900	51 – 32
F 50/250C	11	15	300 – 1000	59 – 43
F 50/250B	15	20	300 – 1000	72 – 59
F 50/250A	18.5	25	300 – 1000	85 – 73
F 50/250AR	22	30	300 – 1000	95 – 83
F 65/125C	4	5.5	600 – 1800	16 – 11
F 65/125B	5.5	7.5	600 – 2000	18 – 13
F 65/125A	7.5	10	600 – 2200	23 – 18
F 65/160C	9.2	12.5	600 – 2200	32 – 22
F 65/160B	11	15	600 – 2400	36.5 – 23
F 65/160A	15	20	600 – 2400	40.5 – 28
F 65/200B	15	20	200 – 2400	44 – 30.5
F 65/200A	18.5	25	200 – 2500	50 – 36.5
F 65/200AR	22	30	200 – 2600	57 – 42
F 65/250C	30	40	400 – 2350	76 – 53
F 65/250B	37	50	400 – 2500	87 – 62
F 65/250A	45	60	400 – 2600	95 – 68
F 80/160D	11	15	500 – 4000	25 – 10
F 80/160C	15	20	500 – 4000	30 – 15
F 80/160B	18.5	25	500 – 4000	35 – 20
F 80/160A	22	30	500 – 4000	40 – 25
F 80/200B	30	40	500 – 3650	56 – 34.5
F 80/200A	37	50	500 – 3900	62 – 40
F 80/250B	45	60	600 – 3600	77 – 54
F 80/250A	55	75	600 – 3900	88.5 – 60
F 100/160C	15	20	1000 – 5000	30 – 12
F 100/160B	18.5	25	1000 – 5200	34 – 14.5
F 100/160A	22	30	1000 – 5500	38 – 17.5
F 100/200C	30	40	833 – 4650	51 – 28
F 100/200B	37	50	833 – 4900	57 – 33
F 100/200A	45	60	833 – 5250	63 – 38
F 100/250B	55	75	800 – 5150	75 – 48
F 100/250A	75	100	800 – 5750	89 – 58

F 32


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 32/160

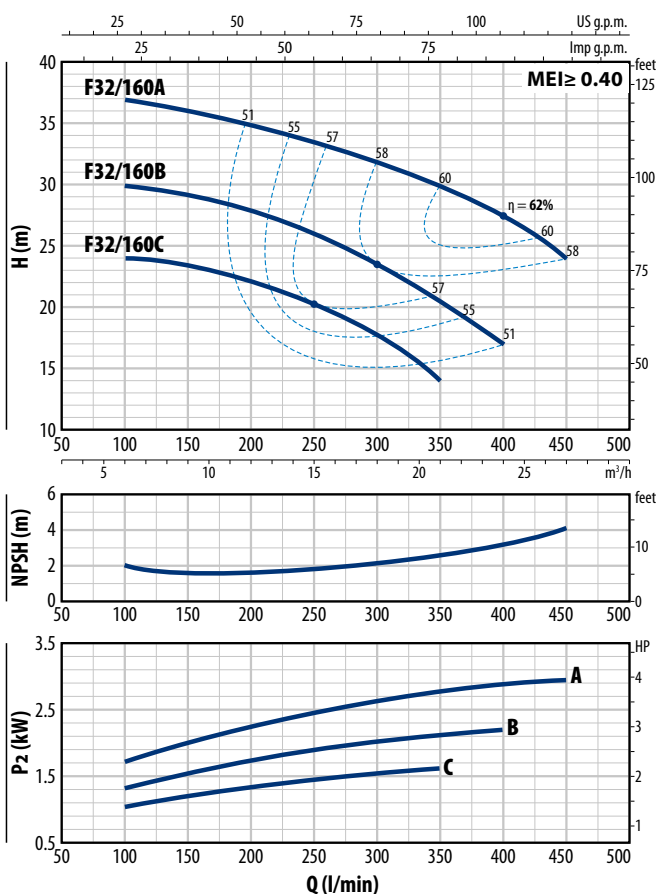

F 32/200

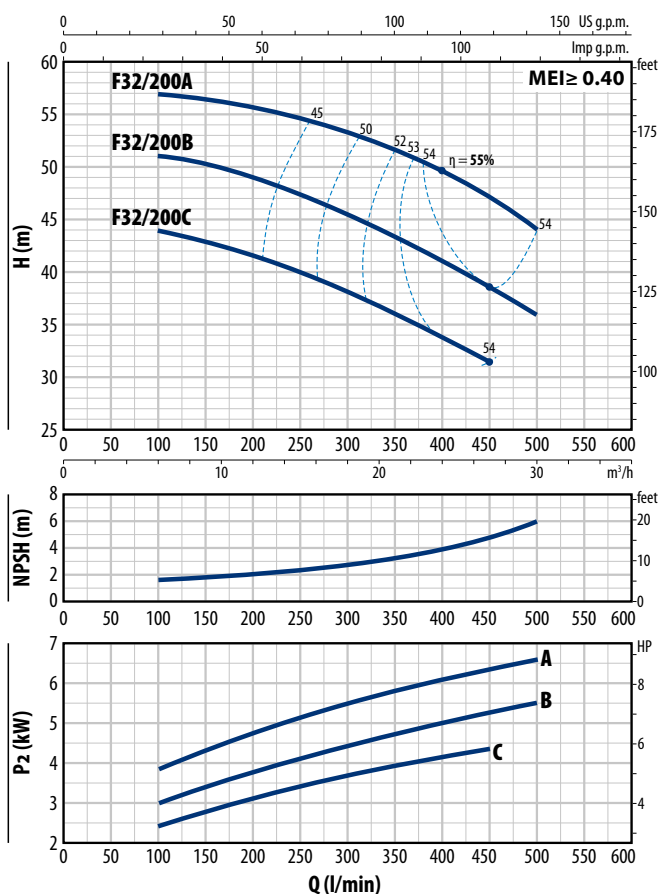

F 32/160

TYPE		POWER (P ₂)		1~3~	Q	m³/h	0	6	9	12	15	18	21	24	27
Single-ph.	Three-ph.	kW	HP				0	100	150	200	250	300	350	400	450
Fm 32/160C	F 32/160C	1.5	2	IE2 IE3	H metres		25	24	23.5	22	20.5	18	14		
Fm 32/160B	F 32/160B	2.2	3				31	30	29	28	26	23.5	20.5	17	
–	F 32/160A	3	4				38	37	36	35	33.5	31.5	30	27.5	24

F 32/200

TYPE		POWER (P ₂)		3~	Q	m³/h	0	6	9	12	15	18	21	24	27	30
Three-ph.		kW	HP				0	100	150	200	250	300	350	400	450	500
F 32/200C		4	5.5	IE3	H metres		46	44	43	41.5	40	38	36	34	31.5	
F 32/200B		5.5	7.5				52	51	50.5	49	47	45	43	41	38.5	36
F 32/200A		7.5	10				60	57	56.5	56	55	53.5	52	50	47	44


Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 32/200H

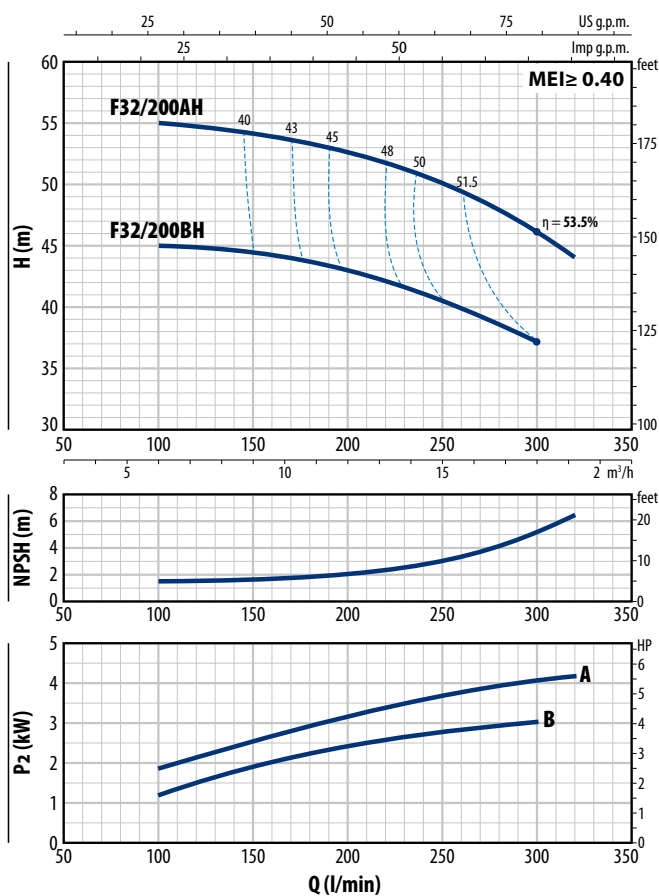

F 32/250

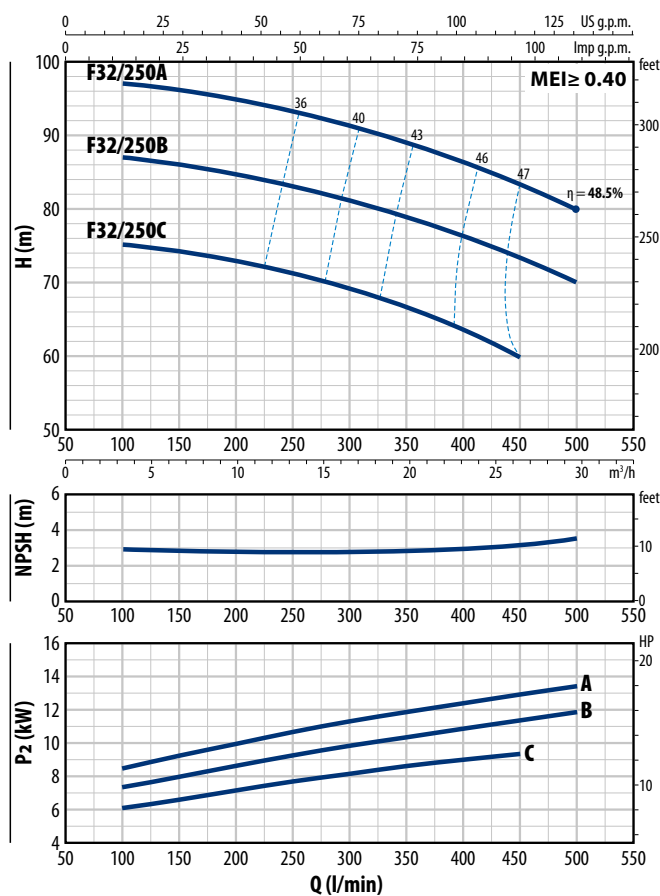

F 32/200H

TYPE	POWER (P ₂)		3~	Q	0	6	9	12	15	18	19.2
	kW	HP			0	100	150	200	250	300	320
F 32/200BH	3	4	IE3	H metres	47	45	44.5	43	40.5	37	
F 32/200AH	4	5.5			57	55	54	52.5	50	46	44

F 32/250

TYPE	POWER (P ₂)		3~	Q	0	6	9	12	15	18	21	24	27	30
	kW	HP			0	100	150	200	250	300	350	400	450	500
F 32/250C	9.2	12.5	IE3	H metres	76	75	74.5	73	71.5	69.5	67	64	60	
F 32/250B	11	15			88	87	86	85	83	81	79	76.5	73.5	70
F 32/250A	15	20			98	97	96	95	93	91	89	86.5	83.5	80

Q = Flow rate H = Total manometric head HS = Suction height


Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

F 40


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 40/125

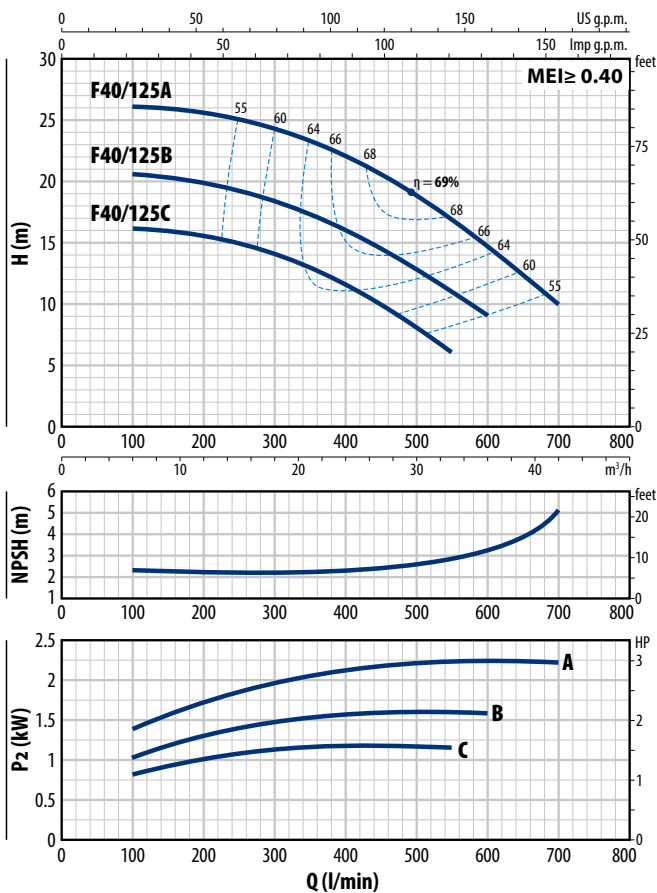

F 40/160

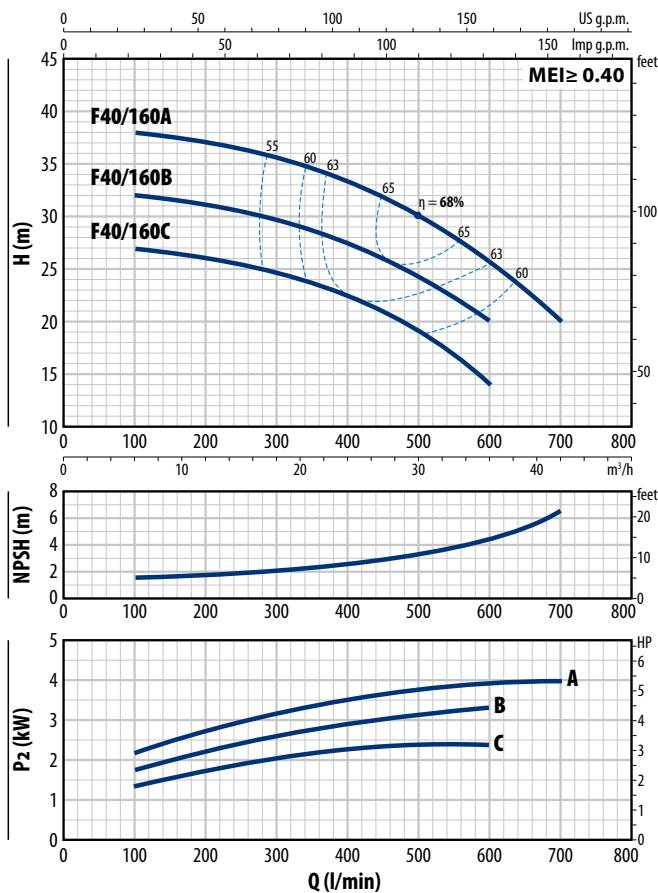

F 40/125

TYPE		POWER (P ₂)		1~	3~	Q m³/h l/min	0	6	12	18	24	30	33	36	39	42
Single-phase	Three-phase	kW	HP				0	100	200	300	400	500	550	600	650	700
Fm 40/125C	F 40/125C	1.1	1.5	IE2	IE3	H metres	16	16	15.5	14	11.5	8	6			
Fm 40/125B	F 40/125B	1.5	2				20.5	20.5	19.8	18.5	16	12.8	11	9		
–	F 40/125A	2.2	3				26	26	25.5	24	22	18.5	17	14.5	12.5	10

F 40/160

TYPE		POWER (P ₂)		1~3~	Q	m ³ /h l/min	0	6	9	12	15	18	24	30	36	42
Single-phase	Three-phase	kW	HP				0	100	150	200	250	300	400	500	600	700
Fm 40/160C	F 40/160C	2.2	3	IE2	IE3	H metres	27	27	26.5	26	25.5	25	22.5	19	14	
–	F 40/160B	3	4				32	32	31.5	31	30.5	30	27.5	24	20	
–	F 40/160A	4	5.5				38	38	37.8	37	36.5	36	33.5	30	26	20


Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 40/200

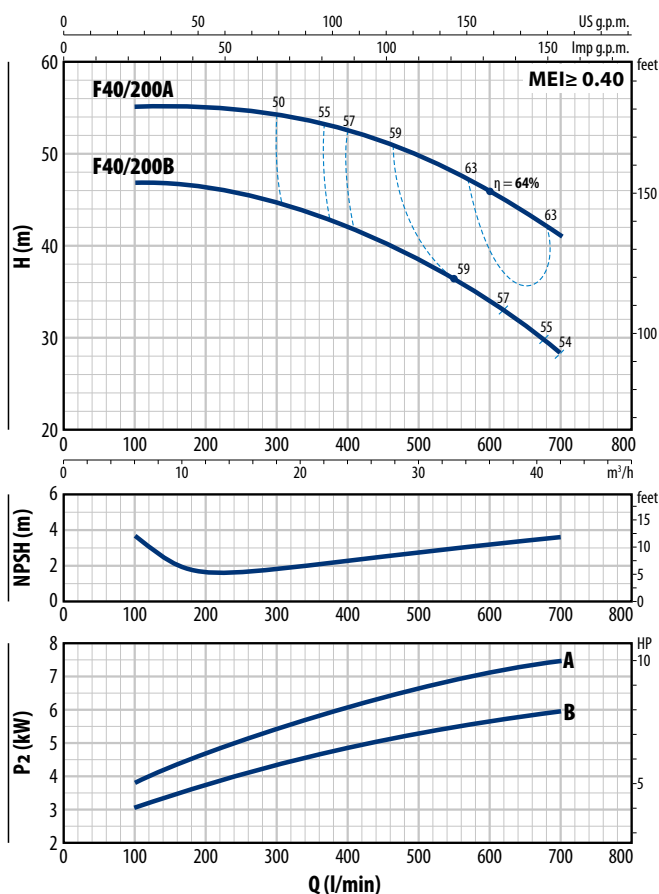

F 40/250

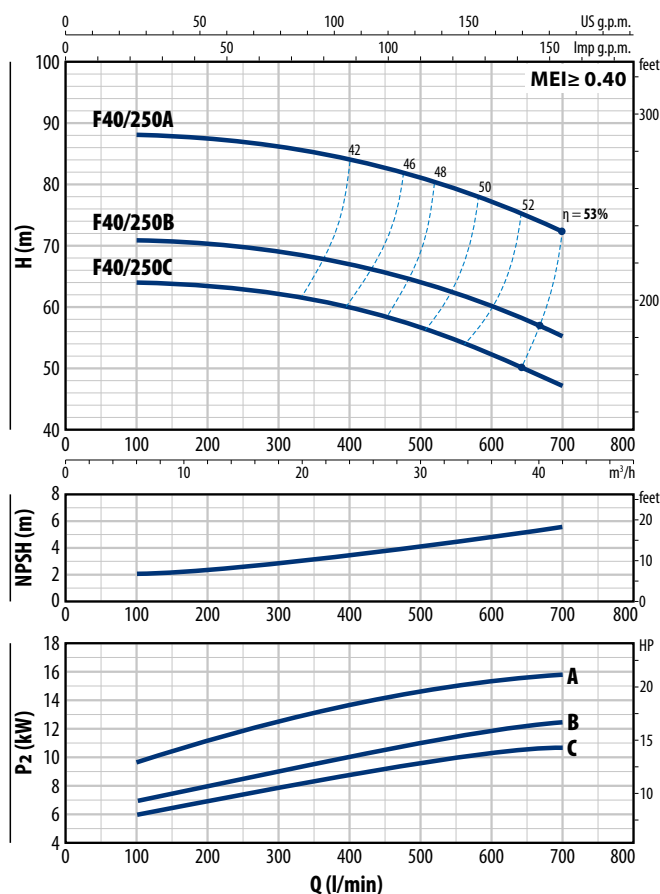

F 40/200

TYPE	POWER (P ₂)		3~	Q	m ³ /h	0	6	9	12	15	18	24	30	36	42
	kW	HP			l/min	0	100	150	200	250	300	400	500	600	700
F 40/200B	5.5	7.5	IE3	H metres		48	47	46.5	46	45.5	44.5	42	38	34	28
F 40/200A	7.5	10				56	55	55	55	54.5	54	52.5	49.5	46	41

F 40/250

TYPE	POWER (P ₂)		3~	Q	m ³ /h	0	6	9	12	15	18	24	30	36	42
	kW	HP			l/min	0	100	150	200	250	300	400	500	600	700
F 40/250C	9.2	12.5	IE3	H metres		64	64	63.5	63	62.5	62	60	56.5	52.5	47
F 40/250B	11	15				71	71	70.5	70	69.5	69	67	64	60	55
F 40/250A	15	20				88	88	87.5	87	86.5	86	84	81	77	72

Q = Flow rate H = Total manometric head HS = Suction height


Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

F 50


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 50/125

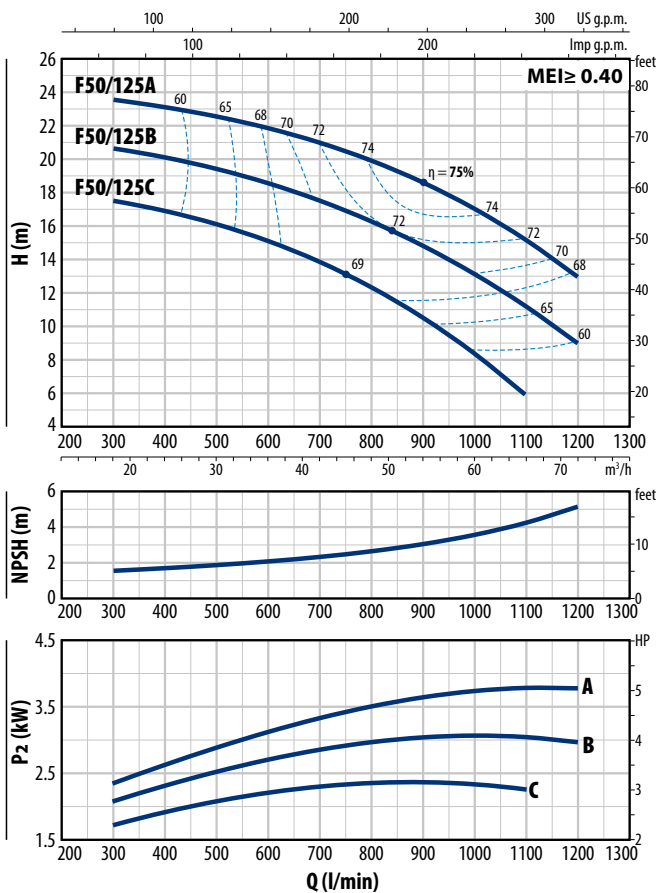

F 50/160

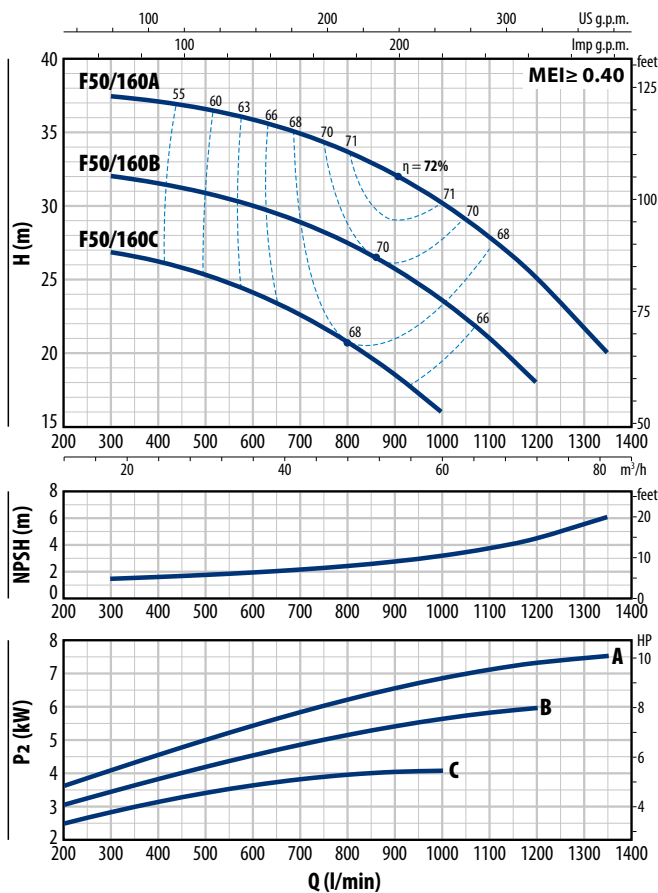

F 50/125

TYPE		POWER (P ₂)		1~3~	Q												
Single-ph.	Three-ph.	kW	HP			m³/h	0	18	24	30	36	42	48	54	60	66	72
Fm 50/125C	F 50/125C	2.2	3	IE2 IE3	H metres	l/min	0	300	400	500	600	700	800	900	1000	1100	1200
–	F 50/125B	3	4				18.5	17.5	17	16	15	14	12.5	10.5	8.5	6	
–	F 50/125A	4	5.5				21.5	20.7	20	19.5	18.8	17.8	16.5	15	13.5	11.2	9
							24.5	23.5	23	22.5	21.8	20.8	19.5	18.3	16.8	15	13

F 50/160

TYPE		POWER (P ₂)		3~	Q												
Three-phase		kW	HP			m³/h	0	18	24	30	36	42	48	54	60	66	72
F 50/160C		4	5.5	IE3	H metres	l/min	0	300	400	500	600	700	800	900	1000	1100	1200
F 50/160B		5.5	7.5				27	27	26.5	25	24.5	23	20	18.5	16		
F 50/160A		7.5	10				33	32	31.7	31	30	29	27.4	25.7	23.5	21	18
							38	37.5	37	36.5	36	35	33.7	32	30.2	28	25

Q = Flow rate H = Total manometric head HS = Suction height


Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

F 65


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 65/125

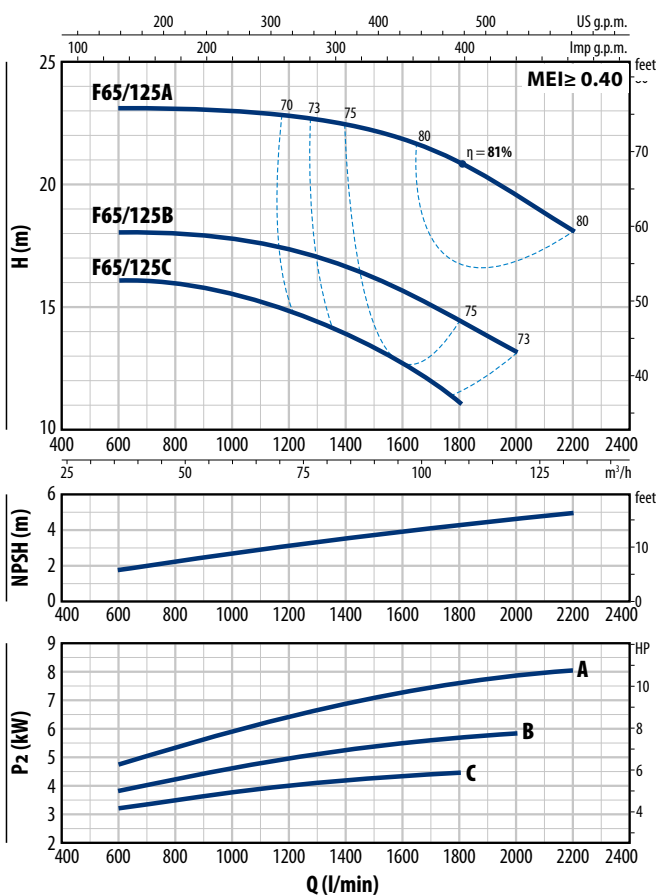

F 65/160

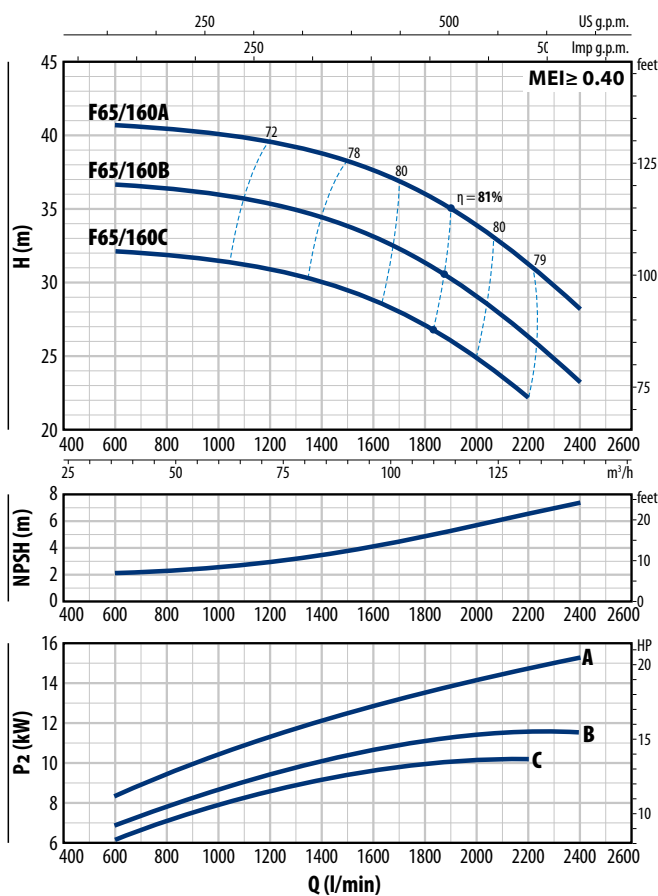

F 65/125

TYPE	POWER (P ₂)		3~	Q m³/h l/min	0	36	48	60	72	84	96	108	120	132
Three-phase	kW	HP			0	600	800	1000	1200	1400	1600	1800	2000	2200
F 65/125C	4	5.5	IE3	H metres	16	16	16	15.5	14.5	13.5	12.5	11		
F 65/125B	5.5	7.5			18	18	18	18	17	16.5	15.5	14.5	13	
F 65/125A	7.5	10			23	23	23	23	22.5	22.5	22	21	19.5	18

F 65/160

TYPE	POWER (P ₂)		3~	Q m³/h l/min	0	36	48	60	72	84	96	108	120	132	144
Three-phase	kW	HP			0	600	800	1000	1200	1400	1600	1800	2000	2200	2400
F 65/160C	9.2	12.5	IE3	H metres	32	32	32	32	32	30	29	27	25	22	
F 65/160B	11	15			37	36.5	36.5	36	35.5	34	33	31	29	26	23
F 65/160A	15	20			41	40.5	40.5	40	39.5	39	37.5	36	34	31	28


Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 65/200

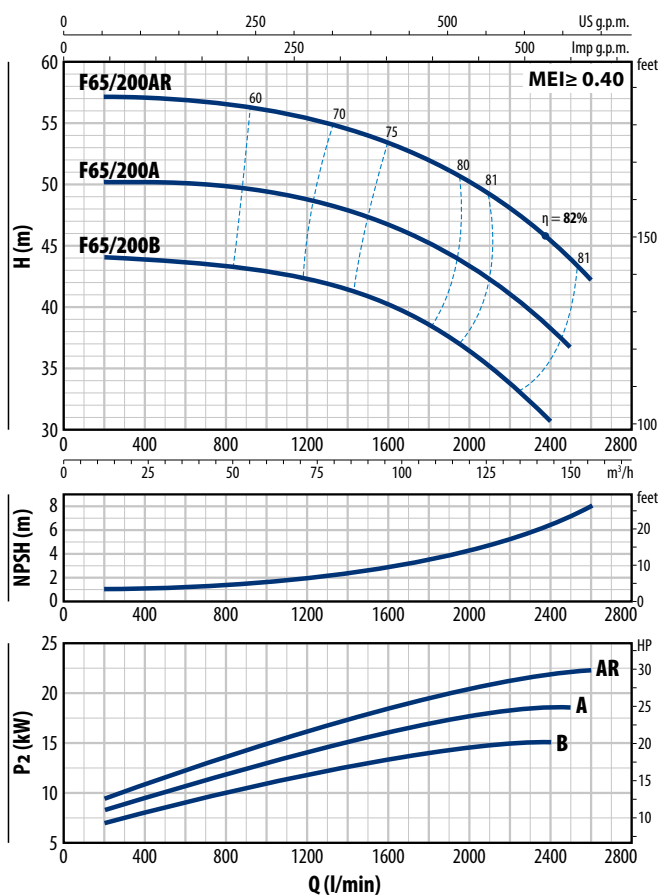

F 65/250

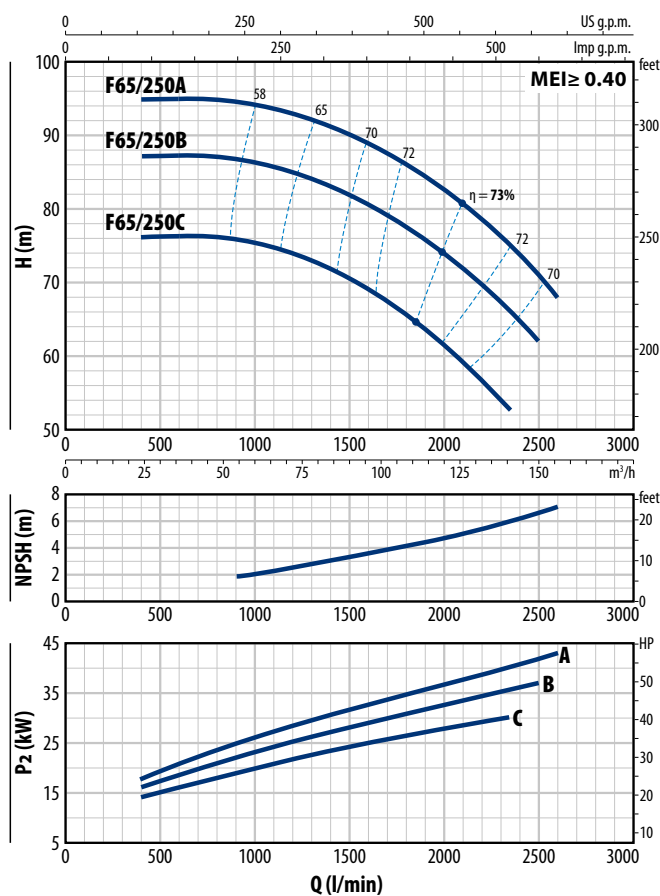

F 65/200

TYPE	POWER (P ₂)		3~	Q														
	kW	HP			m³/h	12	36	48	60	72	84	96	108	120	132	144	150	156
Three-phase					l/min	200	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2500	2600
F 65/200B	15	20	IE3	H metres		44	43.5	43.3	43	42.5	41.5	40	38.5	36.5	34	30.5		
F 65/200A	18.5	25				50	50	50	49.5	49	48	46.5	45	43	41	38	36.5	
F 65/200AR	22	30				57	57	57	56	55.5	54.5	53.5	52	50	48	45.5	43.5	42

F 65/250

TYPE	POWER (P ₂)		3~	Q									
	kW	HP			m³/h	24	40	60	80	100	120	141	150
Three-phase					l/min	400	667	1000	1333	1667	2000	2350	2500
F 65/250C	30	40	IE3	H metres		76	76	75.5	72.5	68	61.5	53	
F 65/250B	37	50				87	87	86	84	80	74	66.5	62
F 65/250A	45	60				95	95	94	92	88	82.5	75	71

Q = Flow rate H = Total manometric head HS = Suction height


Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

F 80


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 80/160

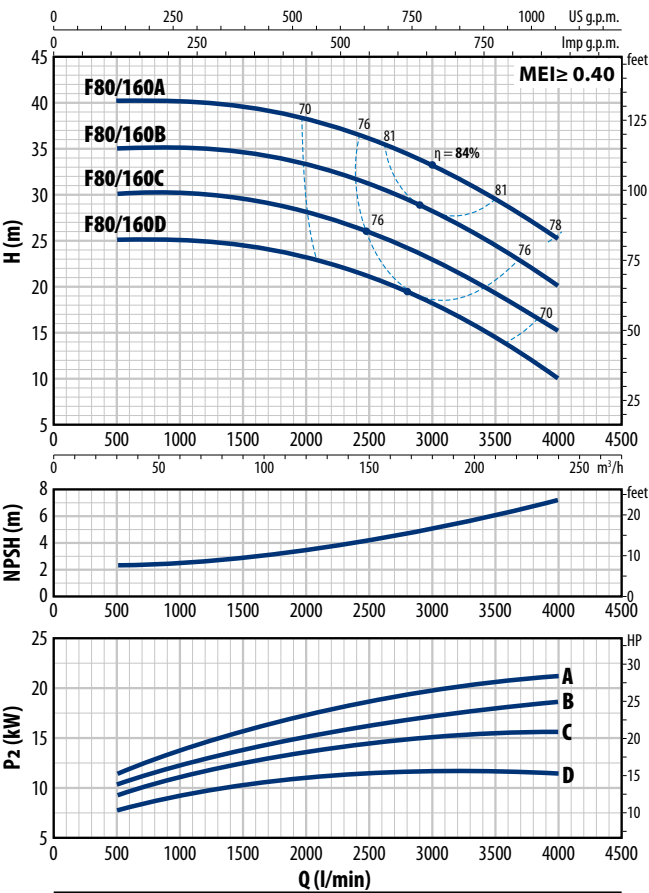

F 80/200

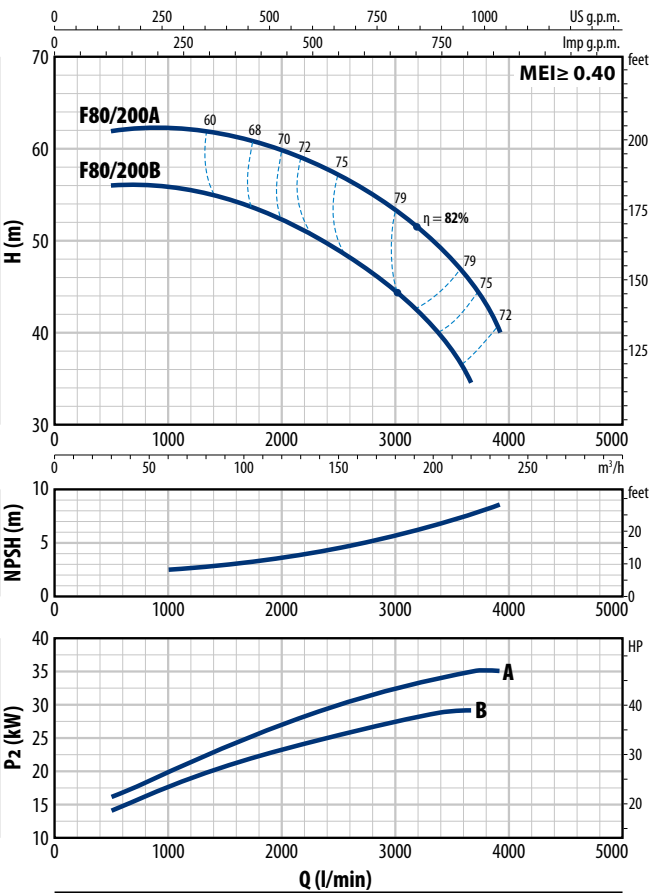

F 80/160

TYPE	POWER (P ₂)		3~	Q	m ³ /h								
	kW	HP			0	30	60	90	120	150	180	210	240
Three-phase					0	500	1000	1500	2000	2500	3000	3500	4000
F 80/160D	11	15	IE3	H metres	25	25	25	24.5	23.5	21	18	14.5	10
F 80/160C	15	20			30	30	30	29.5	28.5	26	23	19.5	15
F 80/160B	18.5	25			35	35	35	34.5	33.5	31	28.5	24.5	20
F 80/160A	22	30			40	40	40	39.5	38.5	36	33	29.5	25

F 80/200

TYPE	POWER (P ₂)		3~	Q m ³ /h l/min	30	50	100	150	200	219	234
Three-phase	kW	HP			500	833	1667	2500	3333	3650	3900
F 80/200B	30	40	IE3	H metres	56	56	54	49	41	34.5	
F 80/200A	37	50			62	62	61	57	50	45.5	40


Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 80/250

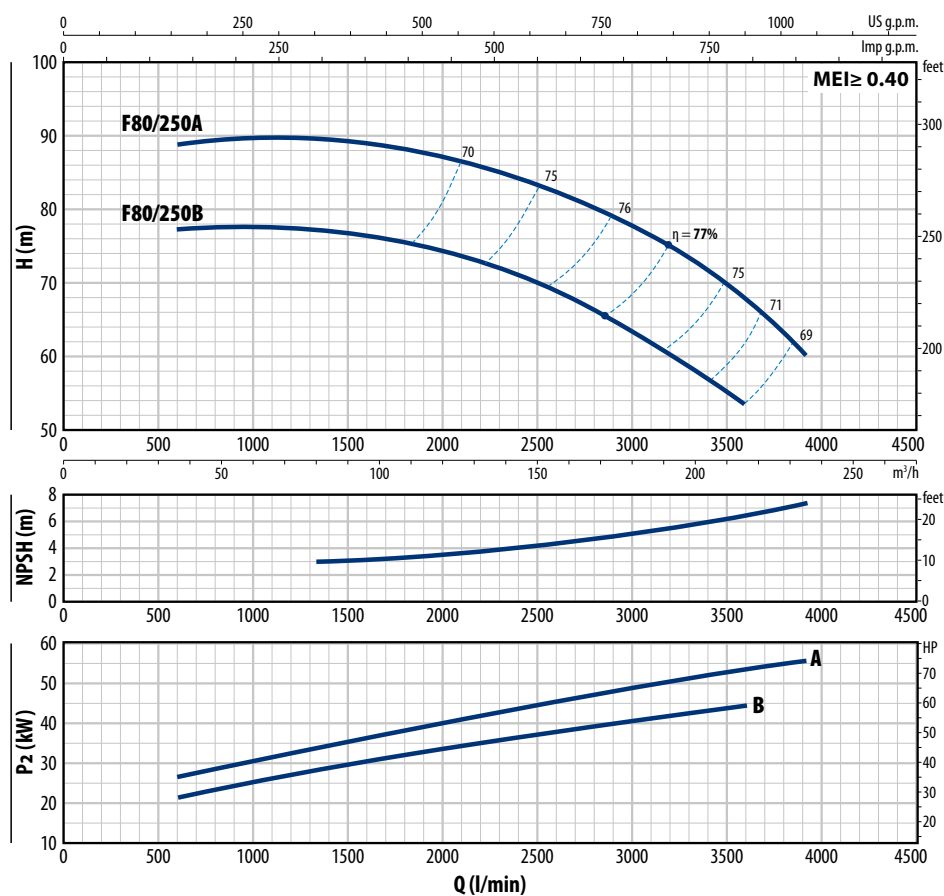

F 80/250

TYPE	POWER (P_2)		3~	Q							
	kW	HP			m^3/h						
Three-phase					l/min	600	833	1667	2500	3333	3600
F 80/250B	45	60	IE3	H metres		77	77.5	76	70.5	58.5	54
F 80/250A	55	75				88.5	89.5	89	83	72	68
											60

Q = Flow rate H = Total manometric head HS = Suction height


Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

F 100


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 100/160

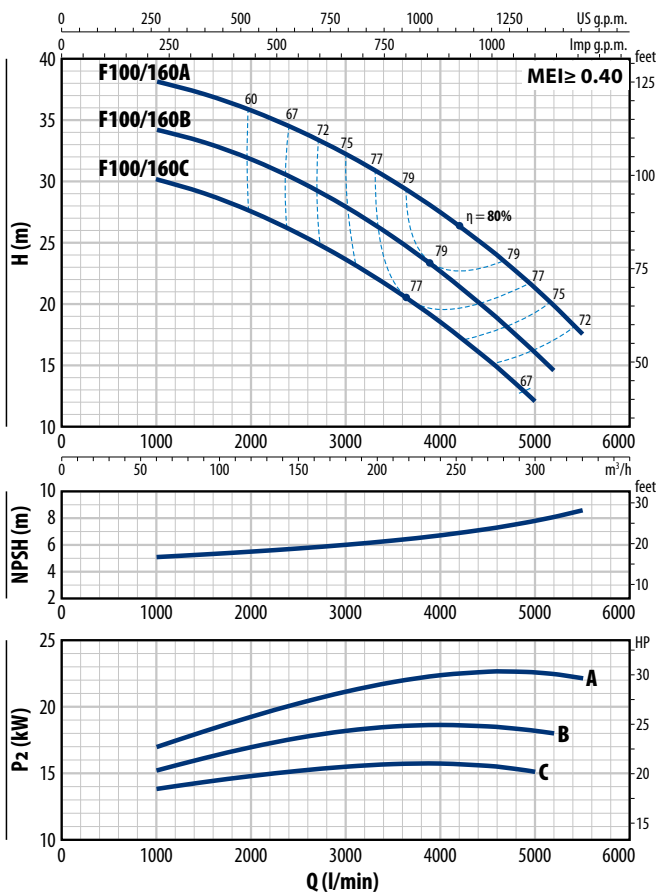

F 100/200

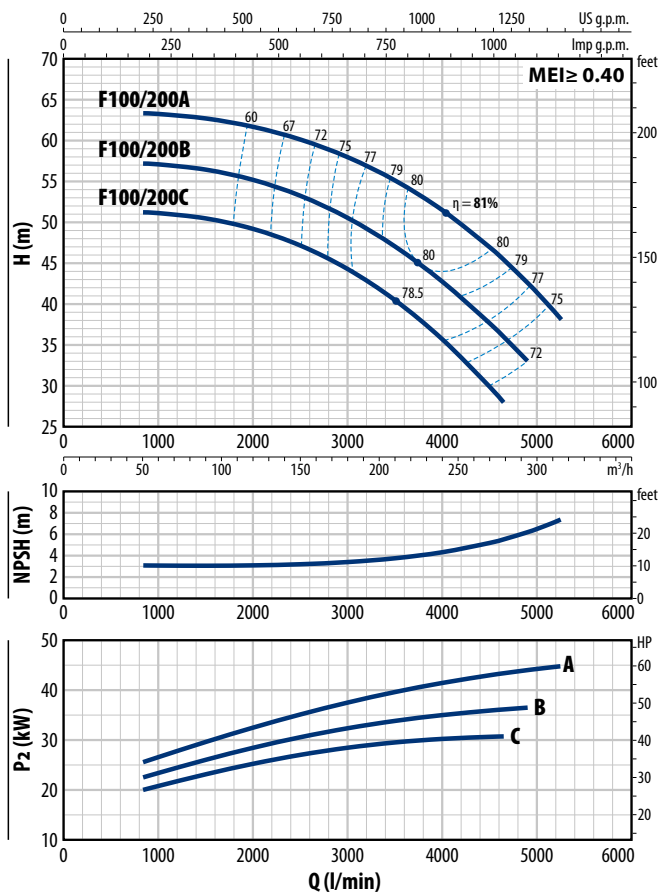

F 100/160

TYPE	POWER (P ₂)		3~	Q	m³/h	60	90	120	150	180	210	240	270	300	312	330
Three-phase	kW	HP			l/min	1000	1500	2000	2500	3000	3500	4000	4500	5000	5200	5500
F 100/160C	15	20	IE3	H metres	30	29	27.5	25.5	23.5	21	18.5	15.5	12			
F 100/160B	18.5	25			34	33	31.5	30	28	25.5	22.5	19.5	16	14.5		
F 100/160A	22	30			38	37	36	34	32	30	27.5	24.5	21	20	17.5	

F 100/200

TYPE	POWER (P ₂)		3~	Q	m³/h	0	50	96	150	180	210	240	279	294	300	315	
Three-phase	kW	HP			l/min	0	833	1600	2500	3000	3500	4000	4650	4900	5000	5250	
F 100/200C	30	40	IE3	H metres	51	51	50	47	44	40.5	35.5	28					
F 100/200B	37	50			57	57	56	53	50.5	47	42.5	36	33				
F 100/200A	45	60			63	63	62.5	60	58	55	51.5	45	42.5	41.5	38		


Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

F 100/250

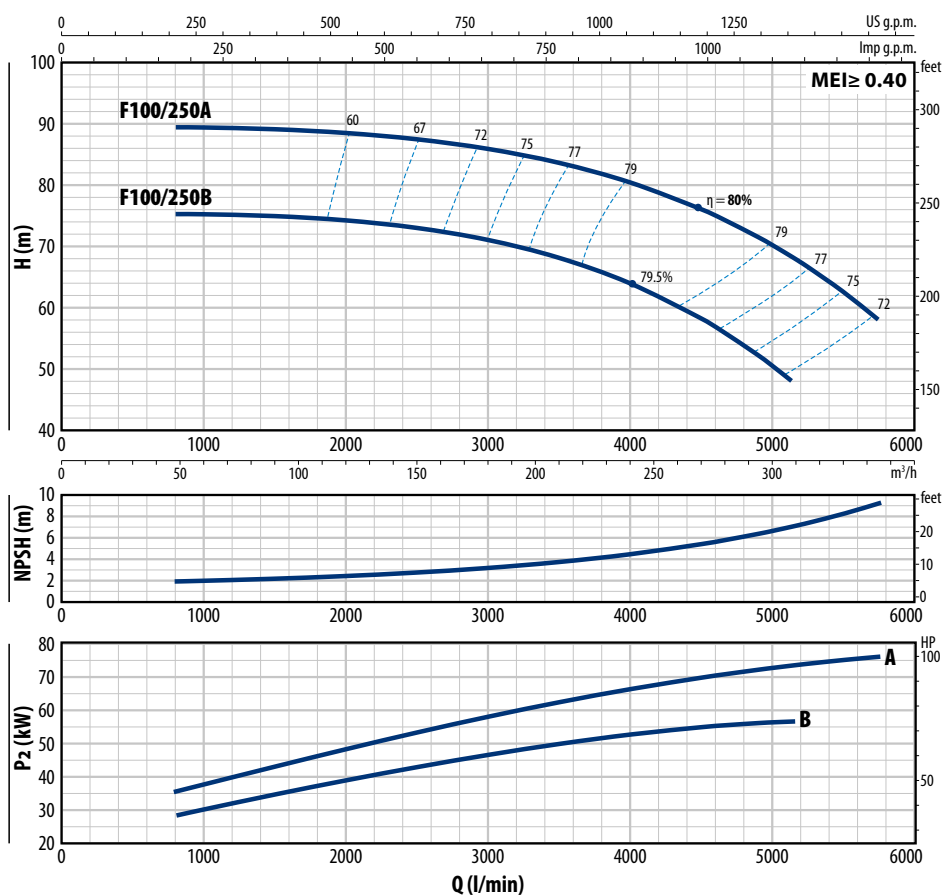

F 100/250

TYPE Three-phase	POWER (P ₂)		3~	Q	48	96	150	180	210	240	300	309	345
	kW	HP			800	1600	2500	3000	3500	4000	5000	5150	5750
F 100/250B	55	75	IE3	H metres	75	75	73	71	68	64	50.5	48	
F 100/250A	75	100			89	89	87.5	86	83.5	80.5	70	68	58

Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

ABSORPTION


TYPE	VOLTAGE
Single-ph.	230 V
Fm 32/160C	11.0 A
Fm 32/160B	12.0 A
Fm 40/125C	8.0 A
Fm 40/125B	10.0 A
Fm 40/160C	15.0 A
Fm 50/125C	13.5 A

TYPE	VOLTAGE			
Three-phase	230 V - Δ	400 V - 人	400 V - Δ	690 V - 人
F 32/160C	7.4 A	4.3 A	–	–
F 32/160B	8.6 A	5.0 A	–	–
F 32/160A	12.1 A	7.3 A	–	–
F 32/200C	17.8 A	10.3 A	–	–
F 32/200B	–	–	11.7 A	6.8 A
F 32/200A	–	–	14.9 A	8.6 A
F 32/200BH	12.6 A	7.3 A	–	–
F 32/200AH	15.4 A	8.9 A	–	–
F 32/250C	–	–	18.5 A	10.7 A
F 32/250B	–	–	22.0 A	12.7 A
F 32/250A	–	–	25.0 A	14.5 A
F 40/125C	5.2 A	3.0 A	–	–
F 40/125B	7.7 A	4.5 A	–	–
F 40/125A	9.0 A	5.2 A	–	–
F 40/160C	9.9 A	5.7 A	–	–
F 40/160B	12.6 A	7.3 A	–	–
F 40/160A	17.1 A	9.9 A	–	–
F 40/200B	–	–	12.6 A	7.3 A
F 40/200A	–	–	15.6 A	9.0 A
F 40/250C	–	–	21.0 A	12.1 A
F 40/250B	–	–	23.5 A	13.6 A
F 40/250A	–	–	30.5 A	17.6 A
F 50/125C	9.3 A	5.4 A	–	–
F 50/125B	13.1 A	7.6 A	–	–
F 50/125A	16.3 A	9.4 A	–	–
F 50/160C	15.7 A	9.1 A	–	–
F 50/160B	–	–	12.3 A	7.1 A
F 50/160A	–	–	15.5 A	9.0 A
F 50/200C	–	–	23.0 A	13.3 A
F 50/200B	–	–	29.5 A	17.1 A
F 50/200A	–	–	34.5 A	19.9 A
F 50/200AR	–	–	41.5 A	24.0 A


TYPE	VOLTAGE			
Three-phase	230 V - Δ	400 V - 人	400 V - Δ	690 V - 人
F 50/250D	–	–	19.0 A	11.0 A
F 50/250C	–	–	21.0 A	12.1 A
F 50/250B	–	–	27.0 A	15.6 A
F 50/250A	–	–	34.0 A	19.7 A
F 50/250AR	–	–	41.0 A	23.7 A
F 65/125C	17.3 A	10.0 A	–	–
F 65/125B	–	–	12.0 A	6.9 A
F 65/125A	–	–	16.5 A	9.5 A
F 65/160C	–	–	19.0 A	11.0 A
F 65/160B	–	–	23.0 A	13.3 A
F 65/160A	–	–	27.5 A	15.9 A
F 65/200B	–	–	30.0 A	17.3 A
F 65/200A	–	–	34.0 A	19.7 A
F 65/200AR	–	–	41.0 A	23.7 A
F 65/250C	–	–	53.0 A	30.6 A
F 65/250B	–	–	65.0 A	37.6 A
F 65/250A	–	–	79.0 A	45.7 A
F 80/160D	–	–	22.0 A	12.7 A
F 80/160C	–	–	29.0 A	16.8 A
F 80/160B	–	–	34.5 A	19.9 A
F 80/160A	–	–	39.0 A	22.5 A
F 80/200B	–	–	53.0 A	30.6 A
F 80/200A	–	–	65.0 A	37.6 A
F 80/250B	–	–	79.0 A	45.7 A
F 80/250A	–	–	98.0 A	56.6 A
F 100/160C	–	–	27.5 A	15.9 A
F 100/160B	–	–	32.5 A	18.8 A
F 100/160A	–	–	39.8 A	23.0 A
F 100/200C	–	–	53.0 A	30.6 A
F 100/200B	–	–	65.0 A	37.6 A
F 100/200A	–	–	79.0 A	45.7 A
F 100/250B	–	–	98.0 A	56.6 A
F 100/250A	–	–	126.0 A	72.8 A

MATERIALS AND COMPONENTS

1	Pump body	Cast iron, fitted with inlet and outlet flanged ports			
2	Cover/Motor bracket	Cast iron			
3	Impeller	Brass for F32/160 - F32/200 - F40/125 - F40/160 - F40/200 - F50/125 - F50/160 Cast iron for F32/250 - F40/250 - F50/200 - F50/250 - F65/125 - F65/160 - F65/200 - F65/250 F80/160 - F80/200 - F80/250 - F100/160 - F100/200 - F100/250			
4	Mechanical seal	Water pump	Seal	Shaft	Materials
		F32/160 - F40/125 - F40/160 - F50/125	FN-20	Ø 20 mm	Graphite Ceramic NBR
		F32/200 - F40/200 - F50/160 - F65/125	FN-24	Ø 24 mm	
		F50/200 - F65/160 - F65/200 - F80/160 - F100/160	FN-32 NU	Ø 32 mm	
		F32/250 - F40/250 - F50/250	FN-38	Ø 38 mm	
		F65/250 - F80/200 - F80/250B - F100/200	FN-40 NU	Ø 40 mm	
		F80/250A - F100/250	FH-45 NU	Ø 45 mm	
5	Motor shaft	Stainless steel AISI 431			
6	Electric motor	Fm : single-phase 230 V - 50 Hz with winding integrated thermal motor protection (up to 1.5 kW) F : three-phase 230/400 V 50 Hz up to 4 kW - 400/690 V 50 Hz from 5.5 to 75 kW ※ Pumps are equipped with high-efficiency motors (IEC 60034-30-1) class IE2 for single-phase models class IE3 for three-phase models Continuous running duty S1			

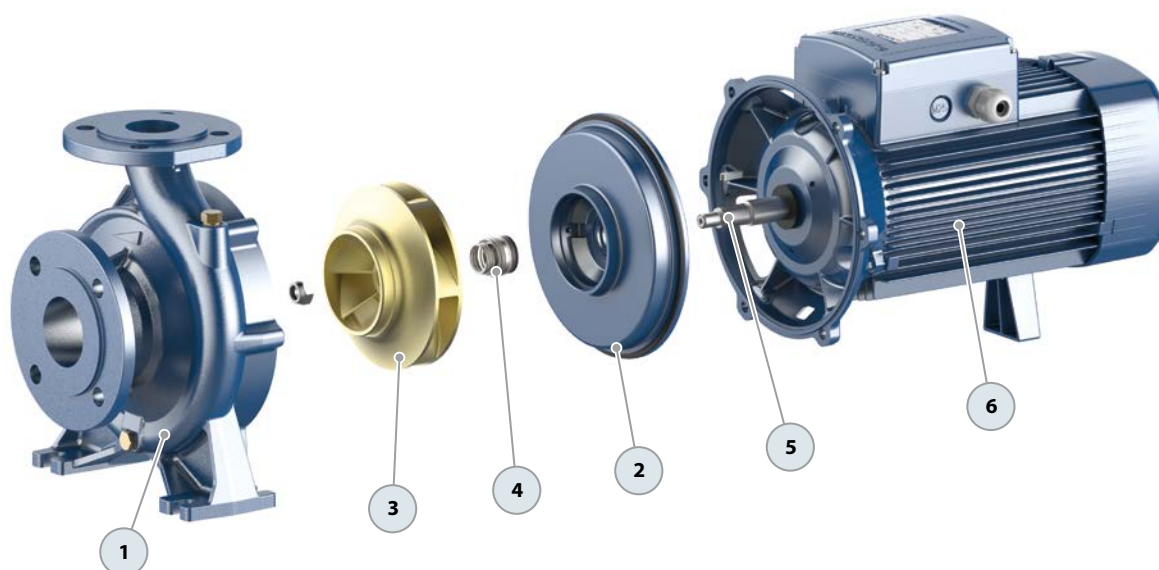


DIMENSIONS AND WEIGHT

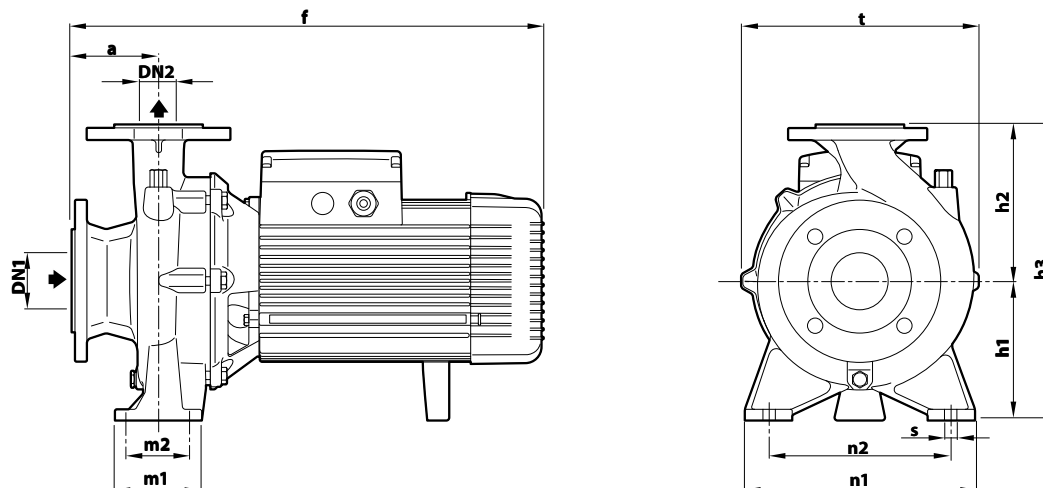


TYPE		PORTS		DIMENSIONS mm											kg						
Single-ph.	Three-ph.	DN1	DN2	a	f	h1	h2	h3	t	n1	n2	m1	m2	s	1~	3~					
Fm 32/160C	F 32/160C	50	32	80	416	132	160	292	240	245	190	100	70	14	32.6	32.5					
Fm 32/160B	F 32/160B				436										35.3	36.0					
-	F 32/160A				473										-	39.0					
-	F 32/200C				478										-	46.0					
-	F 32/200B				528							160			180	340	273	95	-	50.0	
-	F 32/200A																		-	57.0	
-	F 32/200BH			-		41.7															
-	F 32/200AH			478	-	45.0															
-	F 32/250C			100	659	180	225	405	325	320	250	125	95		-	105.0					
-	F 32/250B														-	103.3					
-	F 32/250A														-	121.0					
Fm 40/125C	F 40/125C	65	40	80	421	112	140	252	244	210	160	100	70		31.5	31.0					
Fm 40/125B	F 40/125B				441										33.0	32.4					
-	F 40/125A				435										-	35.3					
Fm 40/160C	F 40/160C				473										35.3	36.0					
-	F 40/160B				498							132			160	292	241	240	190	-	36.1
-	F 40/160A																			-	43.0
-	F 40/200B			548		-	52.4														
-	F 40/200A			548		-	59.0														
-	F 40/250C			659		-	105.0														
-	F 40/250B			659	180	225	405	329	320	250	125	95	-		105.0						
-	F 40/250A												-		128.5						
Fm 50/125C	F 50/125C	455	34.4										35.1								
-	F 50/125B	493	-	35.2																	
-	F 50/125A	498	132	160	292	242	240	190	100	70	-	42.0									
-	F 50/160C										-	45.5									
-	F 50/160B										548	-	51.0								
-	F 50/160A										548	-	57.0								
-	F 50/200C										669	-	100.0								
-	F 50/200B										769	-	114.0								
-	F 50/200A	769	-	127.0																	
-	F 50/200AR	768.5	-	143.0																	
-	F 50/250D	100	659	180	225	405	333	320	250	125	95	-	105.0								
-	F 50/250C											-	108.0								
-	F 50/250B											-	121.0								
-	F 50/250A											759	-		134.0						
-	F 50/250AR											759	-		149.0						
-	F 65/125C											80	65		520	160	180	340	292	280	212
-	F 65/125B	570	-	58.0																	
-	F 65/125A	674	200	360	295	320	250	-	64.0												
-	F 65/160C							-	100.0												
-	F 65/160B							-	100.0												
-	F 65/160A							-	112.0												
-	F 65/200B	676	-	119.3																	
-	F 65/200A	776	180	225	405	336	320	250	-	132.0											
-	F 65/200AR								-	147.0											
-	F 80/160D								100	80		705	-		104.0						
-	F 80/160C	805	-	121.0																	
-	F 80/160B	805	-	133.0																	
-	F 80/160A	805	-	145.0																	
-	F 100/160C	125	100		718	200	280	480	382	360	280	160	120	18	-	141.2					
-	F 100/160B				818										-	155.0					
-	F 100/160A				818										-	165.0					

DIMENSIONS AND WEIGHT

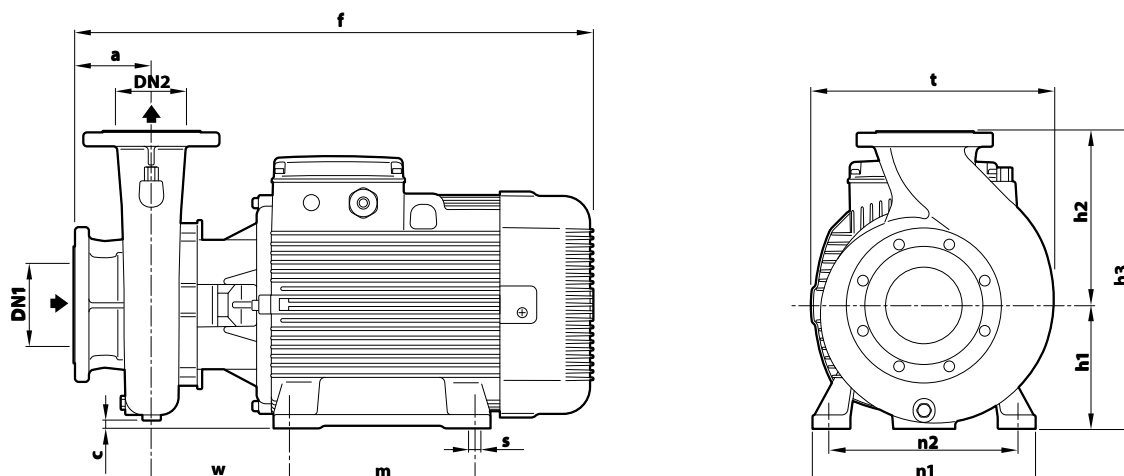


TYPE	PORTS		DIMENSIONS mm												kg
Three-ph.	DN1	DN2	a	f	h1	h2	h3	c	t	n1	n2	w	m	s	3~
F 65/250C	80	65	100	809	200	250	450	15	377	360	318	214.5	305	19	211.0
F 65/250B															225.0
F 65/250A															239.0
F 80/200B	100	80	125	837	200	250	450	25	372	360	318	217.5	305	19	203.0
F 80/200A															218.0
F 80/250B															249.0
F 80/250A				1015	250	280	620	55	490	490	400	294	350	24	547.0
F 100/200C	125	100	125	839	200	280	480	-	395	360	318	219.5	305	19	217.0
F 100/200B															231.0
F 100/200A															245.0
F 100/250B			140	1060	250	280	620	40	485	485	406	313	350	24	551.2
F 100/250A															544.3

PORT FLANGES

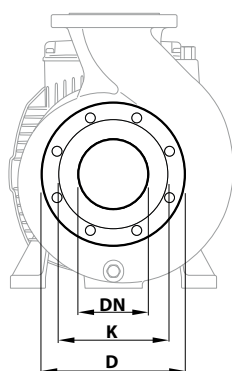

COUNTER-FLANGE

(CAN BE ORDERED SEPARATELY)



DN FLANGE	D	K	HOLES	
mm	mm	mm	N°	Ø (mm)
32	140	100	4	18
40	150	110		
50	165	125		
65	185	145		
80	200	160		
100	220	180	8	18
125	250	210		

DN FLANGE	F	D	K	HOLES	
mm	COUNTER-FLANGE	mm	mm	N°	Ø (mm)
32	1¼"	140	100	4	18
40	1½"	150	110		
50	2"	165	125		
65	2½"	185	145		
80	3"	200	160		
100	4"	220	180	8	18
125	5"	250	210		